

# Pull Handles


## Straight Series



66 6548 ■

Matches FSB lever handle model 1003.  
Handle cross-section 40 × 10 mm

Safety clearance S = 55 mm  
Fastening M8

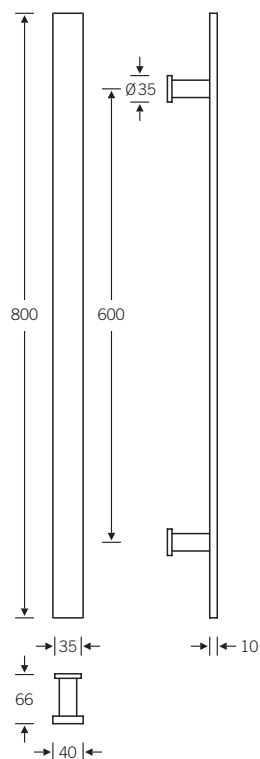


All details subject to modification

### Fastening Methods (Details on page 68/69)

- A Back-to-Back
- B Through-Bolted
- C Concealed - Threaded Insert
- D Concealed - Drop Clamp

# Order Form

## Pull Handles 6519, 6520 and 6548

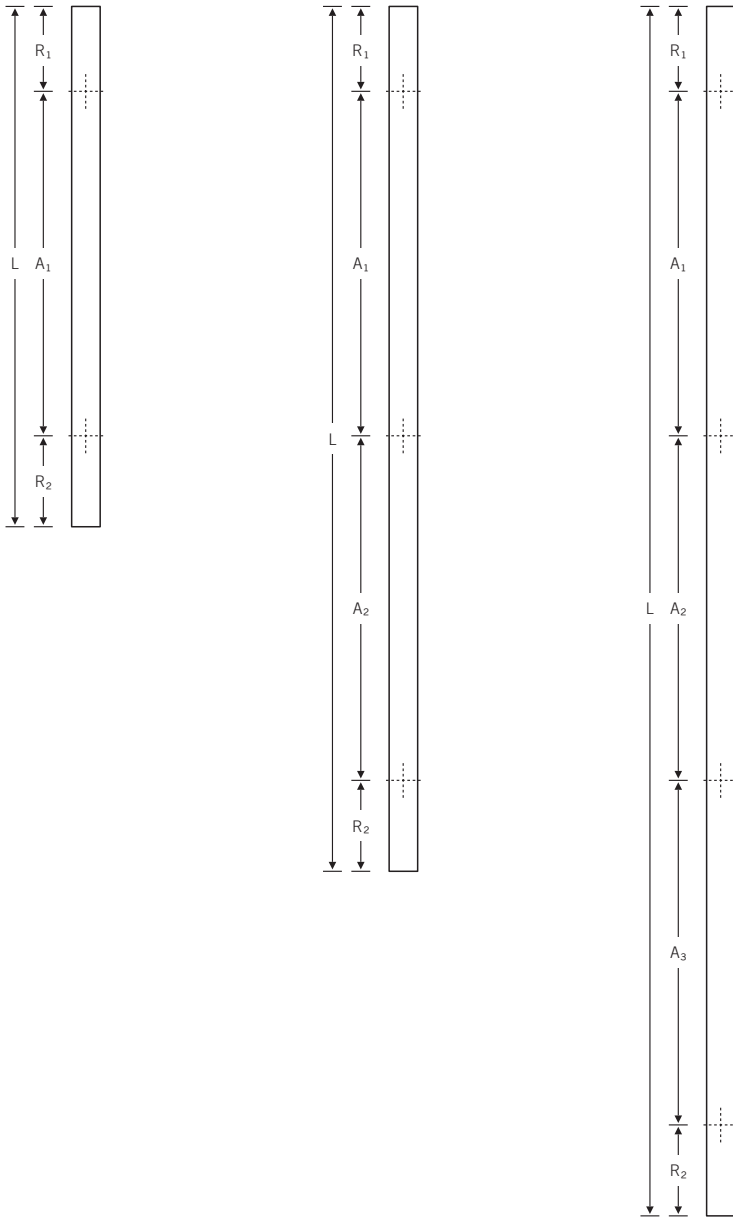

Please use a copy of this page to order the door handle series 6519, 6520 and 6548 in variable lengths.

Start by using the product numbers to define the desired version.

In the table below, please enter the quantity and overall length. Then add the distance(s) (A) between the support(s) and the end support distance (R).

66 6519 99 ( 25 × 25 mm)



66 6520 99 ( 25 × 25 mm)



To ensure stability, the support distance (A) should not exceed 1200 mm.

66 6548 99 (40 × 10 mm)



To ensure stability, the support distance (A) should not exceed 600 mm.

All details subject to modification

| Quantity | Overall length | Support distance |                |                | End support distance* |                | Fastening type |
|----------|----------------|------------------|----------------|----------------|-----------------------|----------------|----------------|
|          | L              | A <sub>1</sub>   | A <sub>2</sub> | A <sub>3</sub> | R <sub>1</sub>        | R <sub>2</sub> |                |
|          |                |                  |                |                |                       |                |                |
|          |                |                  |                |                |                       |                |                |
|          |                |                  |                |                |                       |                |                |

\* min. 30 mm, max. 350 mm for 6519, 6520

\* min. 30 mm, max. 250 mm for 6548