

## Features

- 8 (203 mm) centers.
- 6-5/8" (168 mm) wall-to-spout outlet with pail hook.
- 1/4-turn full brass ceramic valve.
- 13.5 gal/min (51 l/min) flow rate at 60 psi (4.1 bar).
- 2-7/16" vandal-proof metal lever handles.
- Threaded spout for hose connection.
- Atmospheric vacuum breaker to prevent back flow (not intended for continuous pressure).
- Integral supply stops with lock key for easy and convenient access.
- Includes 6 ft rubber hose and wall hook.
- Drain sold separately.

## Material

- Solid brass construction with thick chrome plating for rough commercial applications.

## Installation

- Eccentric inlet shanks for easy installation.

## Recommended Products/Accessories

K-23723 Faucet cleaner



ADA

CSA B651

OBC

## Codes/Standards

ASME A112.18.1/CSA B125.1

ADA

ICC/ANSI A117.1

CSA B651

OBC

## KOHLER® One-Year Limited Warranty


See website for detailed warranty information.

## Available Colors/Finishes

*Color tiles intended for reference only.*

### Color Code Description

	CP	Polished Chrome
--	----	-----------------

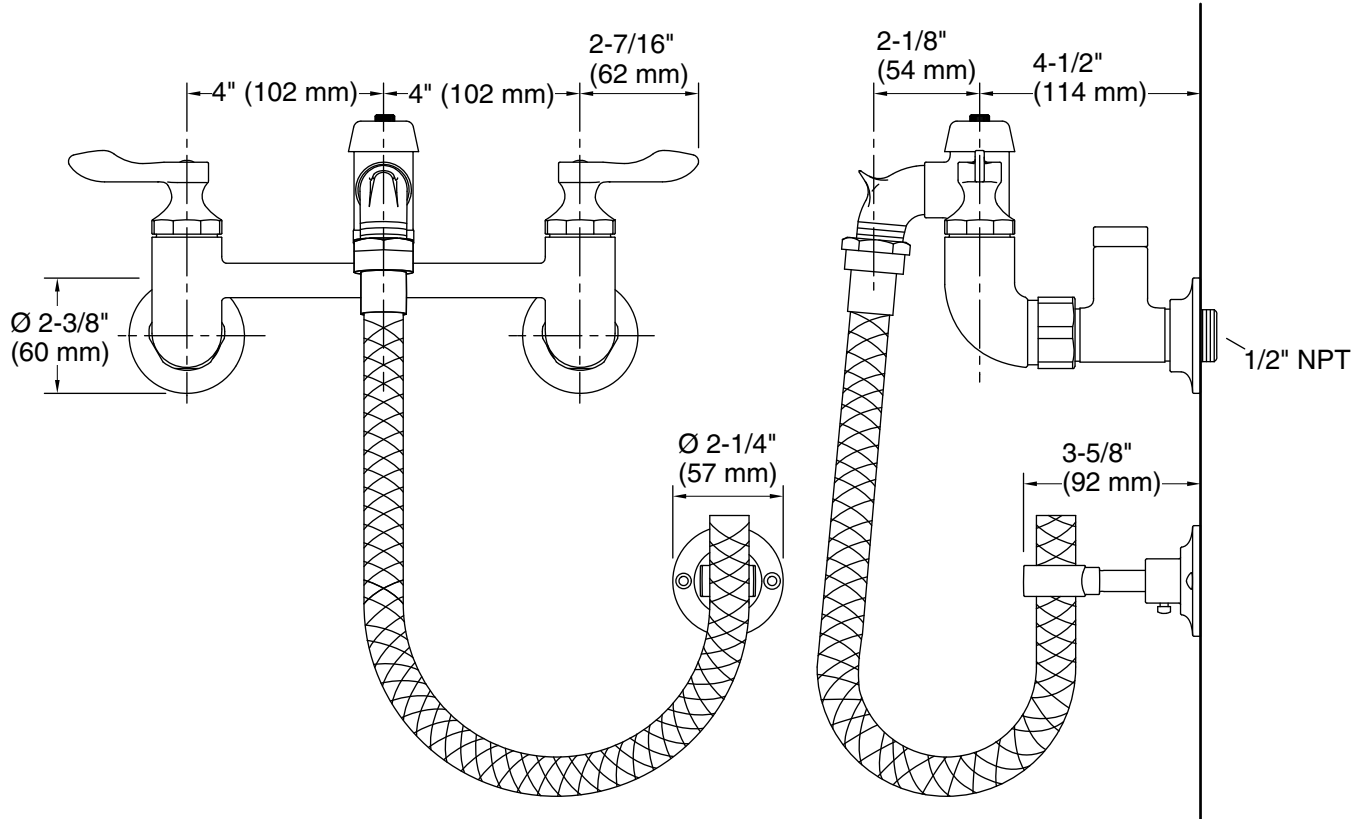

## Technical Information

All product dimensions are nominal.

### Faucet:

Flow rate:	13.5 gal/min (51.1 l/min)
Pressure:	60 psi (4.1 bar)
Valve body:	Cast brass
Drain included:	No

### Spout:

Spout reach:	6-5/8" (168 mm)
Handle clearance:	2-7/16" (62 mm)

## Notes

Install this product according to the installation instructions.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.