


ASSEMBLY INSTRUCTION

COMPONENT PARTS

FITTINGS

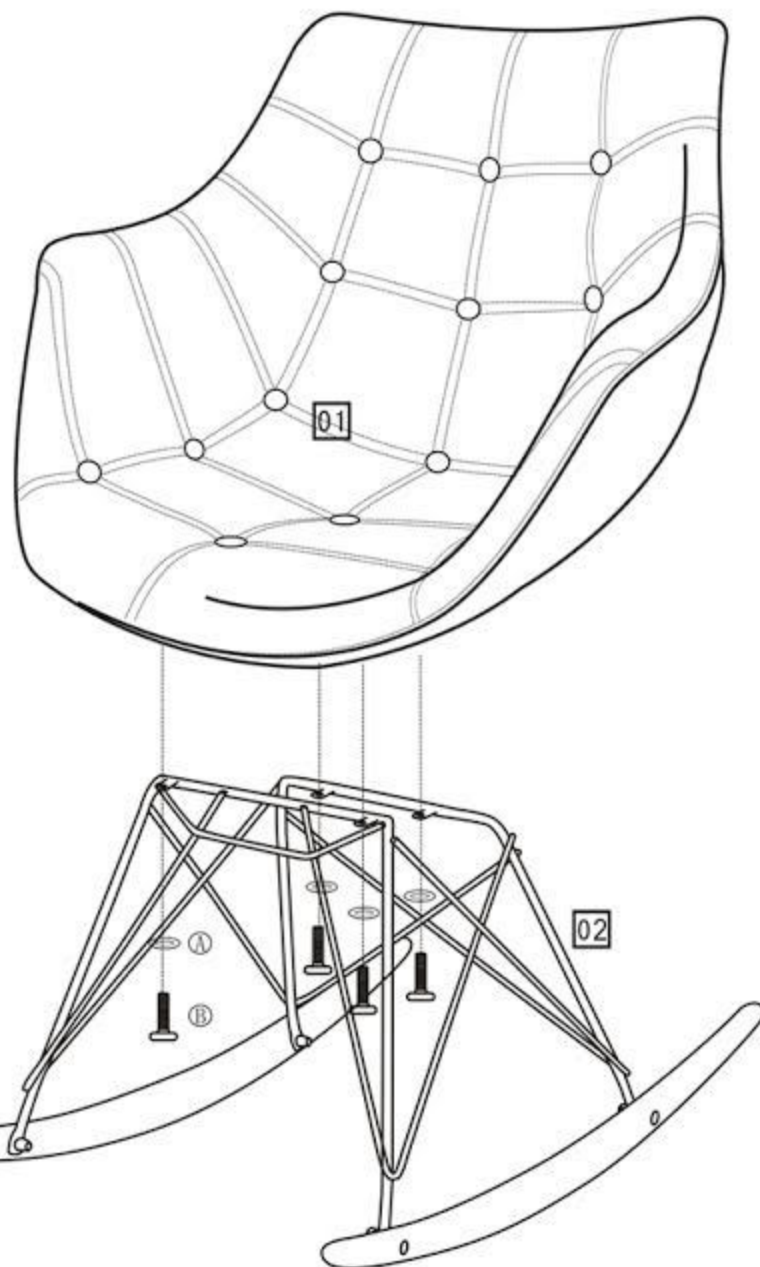

Step1

Please place the seat and the feet upside down

Step2

Insert 2 screws at an angle and lightly fasten - do NOT tighten. Part ③, the washer, should be placed in direct contact with the seat while part ④, the screw, should be inserted through part ③ into the designated hole at an angle.

Step3

Please load the remaining 2 screws also diagonally

Step4

Please push the metal bars on the shell until the holes match with each other

Step5

Tighten these 2 screws together with the previous 2 screws.

Step6


Please place the chair upside down

①



X4

②



X4

COMPONENT CHECKLIST

PART	No.	Qty.	
Seat	01	1	<input type="checkbox"/>
tube	02	1	<input type="checkbox"/>

TOOLS REQUIRED



Allen key (supplied)