















Assembly Instructions

56005130

Parts and Tools

A	Mounting Bracket		X 1
B	Canopy		X 1
C	Chain		X 1
D	Open Ring		X 1
E	Lamp Body		X 1
F	Box		X 1
G	Flat Iron		X 6
H	Nut		X 8
I	Screw		X 4
J	Wire Connector		X 3
Z1	Nut for A (Spare Parts)		X 1
Z2	Nut for A (Spare Parts)		X 2
Z3	Non Slip Washer for A (Spare Parts)		X 1
Z4	Non Slip Washer for A (Spare Parts)		X 2


Before beginning

- 1) Check and open the numbered packaged bags.
- 2) Read this Assembly Instructions from beginning to end before starting to assemble.
- 3) Take an inventory of the required parts to ensure all are available.
- 4) Assemble the separated parts according to the illustration with the providing tools.
- 5) To prevent accidental choking hazards, keep all packing materials away from small children.
- 6) Only tighten hardware until ALL hardware are fully engaged on their locations. Overtighten bolts will damage the bolt threads.
- 7) Use only factory provided hardware to assemble. Unapproved hardware can damage product or jeopardize the structural integrity of the product.
- 8) The use of power tool to assemble is not recommended due to high risk of over-torque, which can damage the product.

WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LINCENSED ELECTRICIAN.

WARNING*SWITCH OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER BEFORE INSTALLATION.**

Please make sure power is shut off!

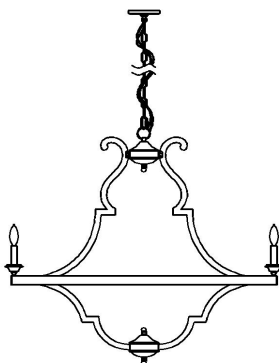

ASSEMBLY REQUIRES
TWO PEOPLE



20 MINUTE
ASSEMBLY TIME




KEEP INSTRUCTIONS
FOR FUTURE USE

Assembly Instructions

56005130

1

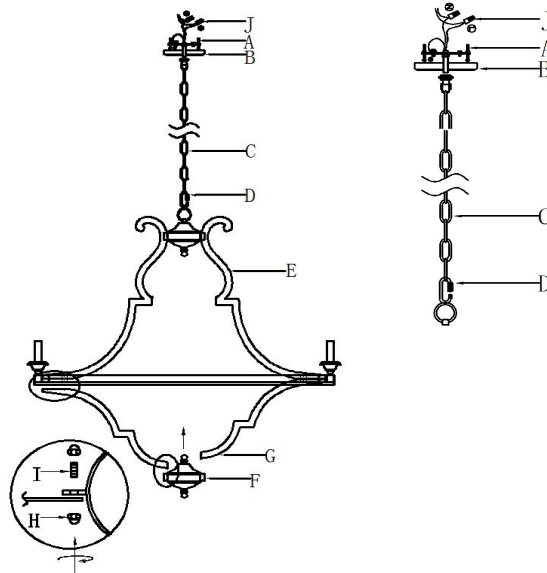


- 1) Fix the flat iron (G) on the lamp body (E) and the box (F) with screws (I) and nuts(H) according to the illustration.
- 2) Remove the mounting bracket (A) from the canopy (B) by loosening the collar.
- 3) Taking off the open ring (D) and use the dimensions of the fixture as a guide, shorten the chain (C) as needed using a pair of chain pliers.
- 4) Use the open ring (D) to link the chain (C) and the loop, put the cable and ground wire through the chain (C) in every 3~4 rings until through the ceiling loop .
- 5) ENSURE THE ELECTRICITY SUPPLY IS TURNED OFF BEFOR PROCEEDING.
- 6) Affix the mounting bracket (A) on the outlet box.
- 7) Wrap both safety cable with wire connector (J) , push the cable into the outlet box , and then fix the canopy(B) with the collar again.
- 8) Attach the canopy (B) to the mounting bracket (A) and secure with lock collar.

2



E12 Max 40W

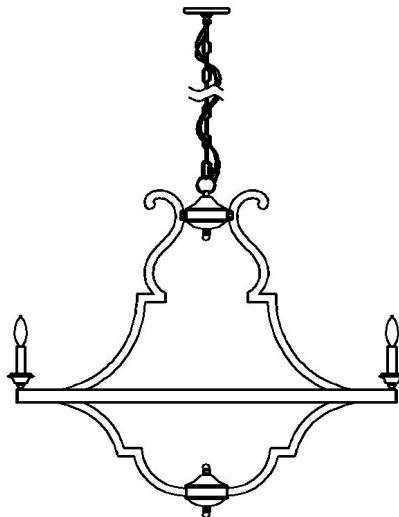

- 1) Install the bulbs (Not Included), gently grasp the bulb firmly and rotate it clockwise until it is securely in place.
- 2) Once the installation is complete, remember to turn on the power at the fuse or circuit breaker.

Clean with a dry, soft cloth only, use no harsh abrasives or chemical agents