



ASSEMBLY INSTRUCTIONS

SKU:277/278

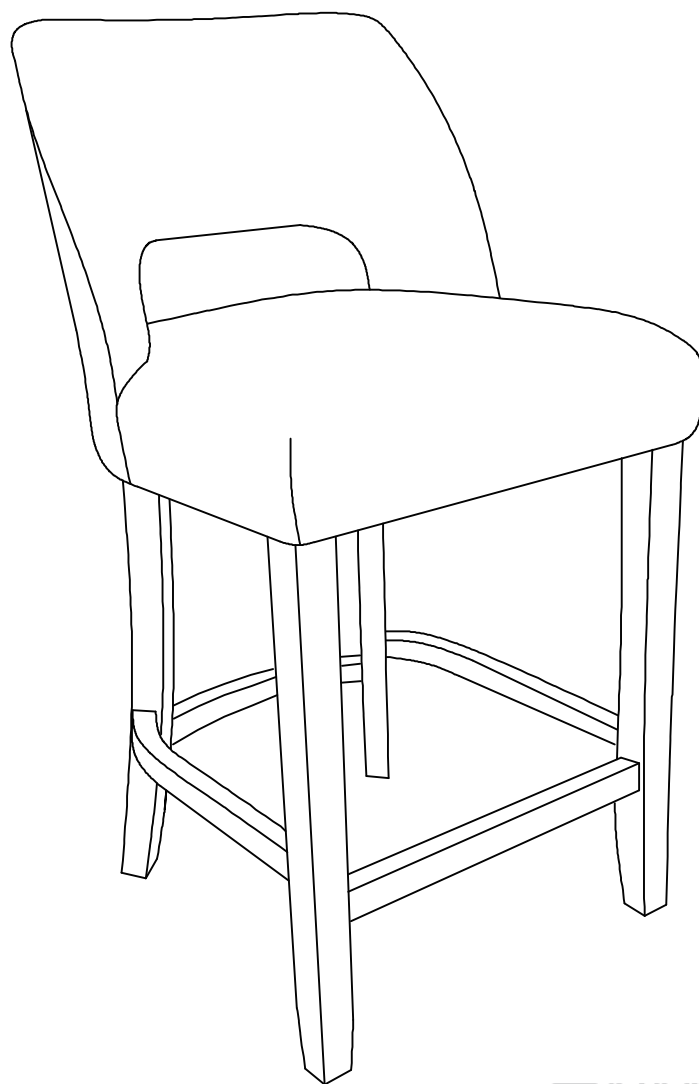

Scan the QR code to view
the installation video



WARNING



Please read the instructions carefully and follow the assembly steps.

Do not tighten bolts or screws completely until all hardware is lined up and inserted into the holes.

Do not over-tighten screws and bolts to avoid stripping the hardware or cracking the item.

Assemble your item on a flat, carpeted area, with plenty of space to work. This will prevent damage and scratches to your floors or the item while you're assembling the product.

Keep all components and packaging out of reach of children or animals to avoid risk of choking or suffocation.

ASSEMBLY PARTS AND TOOL




BEFORE YOU GET STARTED. A FEW POINTERS:



Please open the Seat Cushion bottom and take out all accessories before installation.



Please use the included wrench instead of an **ELECTRIC HAND DRILL** in case of damage to the chair leg.

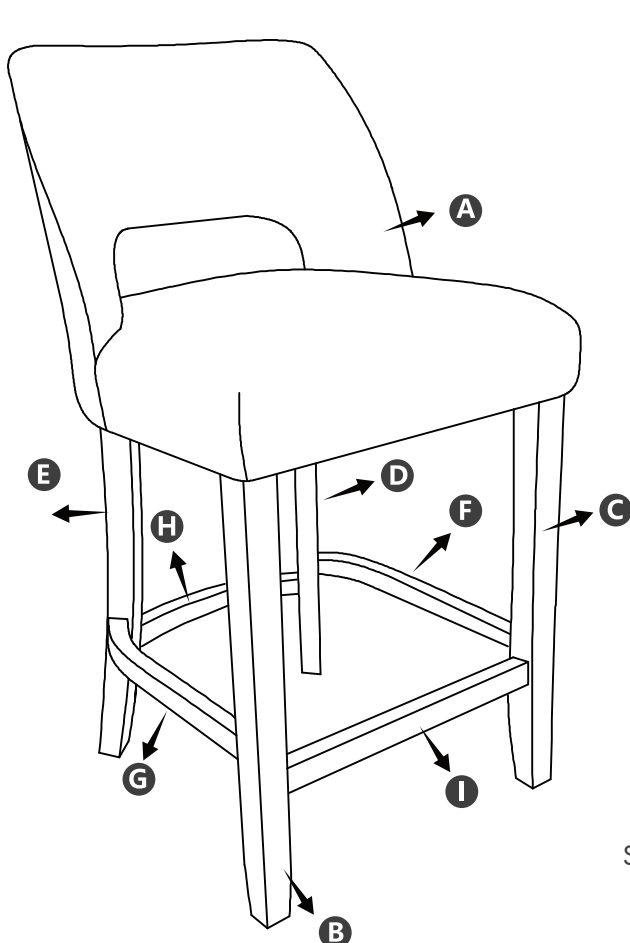

B C D E F G H I


Refer to the left picture for the corresponding positions of all wooden legs and crossbars

J



Screw *8

K



Bolt *8

L




Spring Washer *8

M



Flat Washer *8

N



Wrench *2


STEP 1:

A




Upper (seat) *1

N



Wrench *2



B



Front Leg *1
(Left)

C



Front Leg *1
(Right)

D




Back Leg *1
(Right)

E



Back Leg *1
(Left)

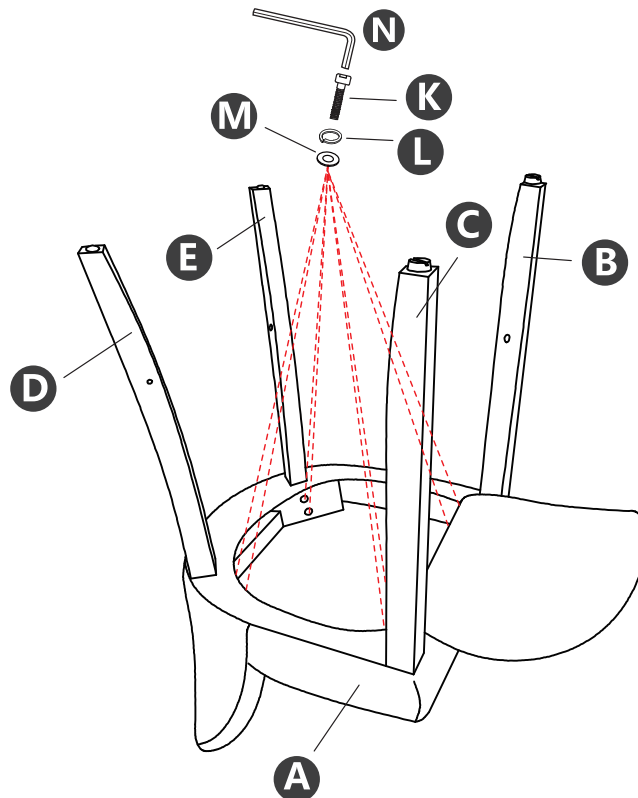

K



Bolt *8

L



Spring Washer *8

M



Flat Washer *8

TIPS1: For easiest assembly,
position the chair upside down
on a flat surface like a table.

TIPS2: Do not tighten the screws
completely in this step
otherwise it will affect
the subsequent steps.



STEP 2:

TIPS1: When installed correctly, the crossbar curves outwards

F



Right Side Crossbar *1

G




Left Side Crossbar *1

H




Back Crossbar *1


I



Front Crossbar *1



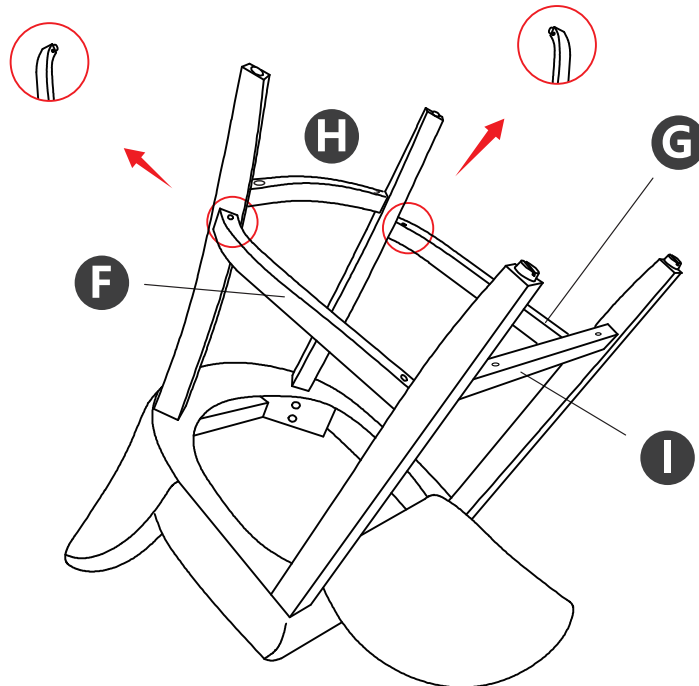


STEP 3:

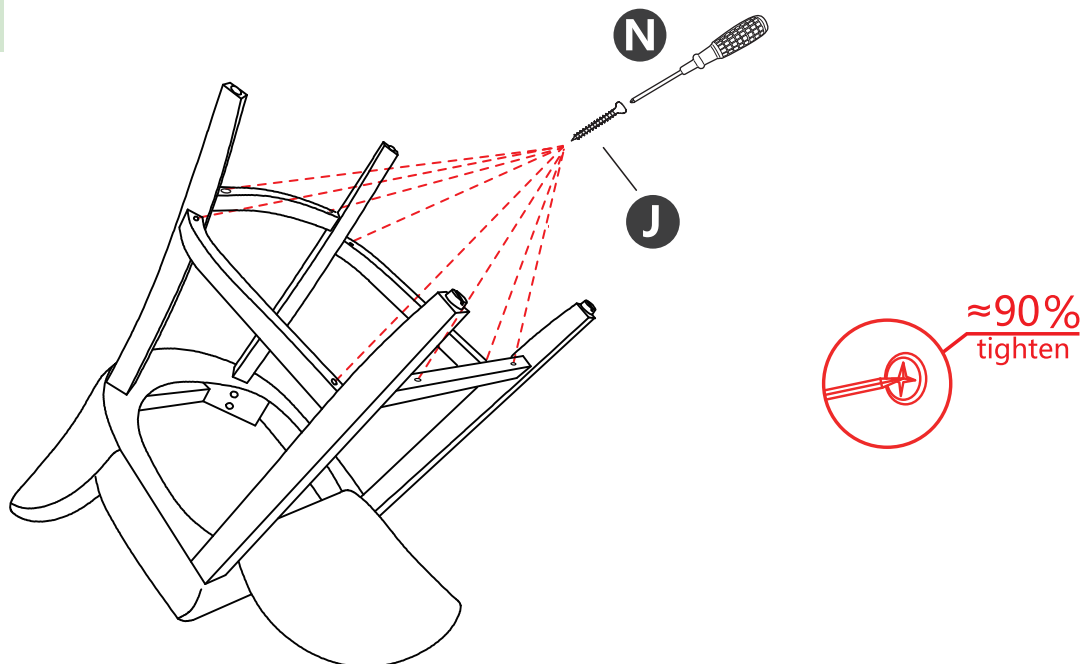


TIPS1: J-screws are self-drilling screws and require firm downward pressure to drill into place.

STEP 4:

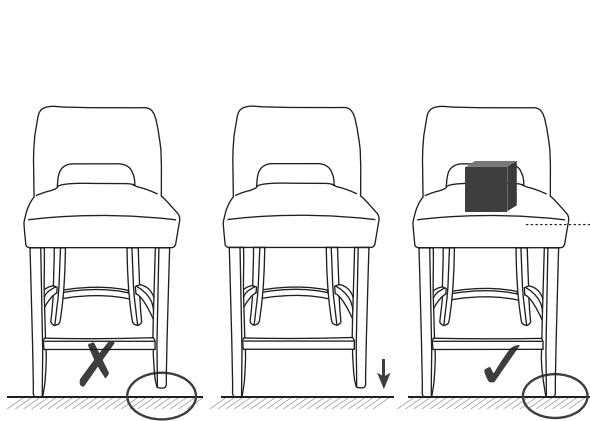


Put pressure on the seat.
(About 44lbs/20kg)

1. Place the chair on a flat surface and apply pressure to the seat. Firstly tighten the screws on the crossbar, then tighten the bolts where the legs connect to the seat. Make sure all bolts are fully tightened before using the chair.




2. If the legs are uneven, you can also adjust the foot pegs at the bottom of the legs to improve balance.

STEP 5:

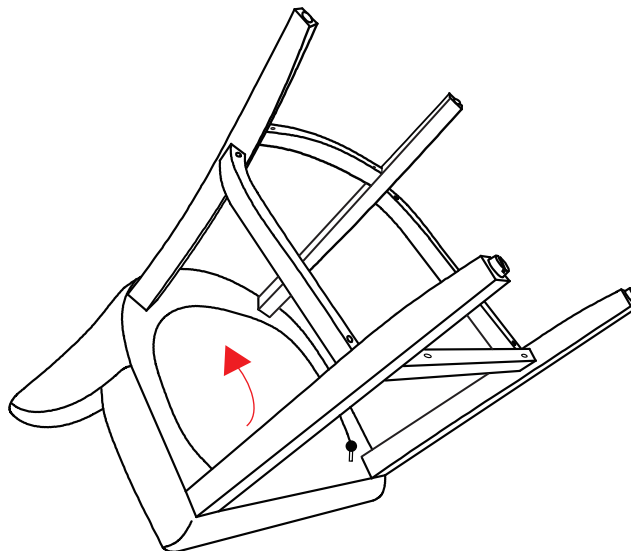

Don't forget to close the zipper.

STEP 6:

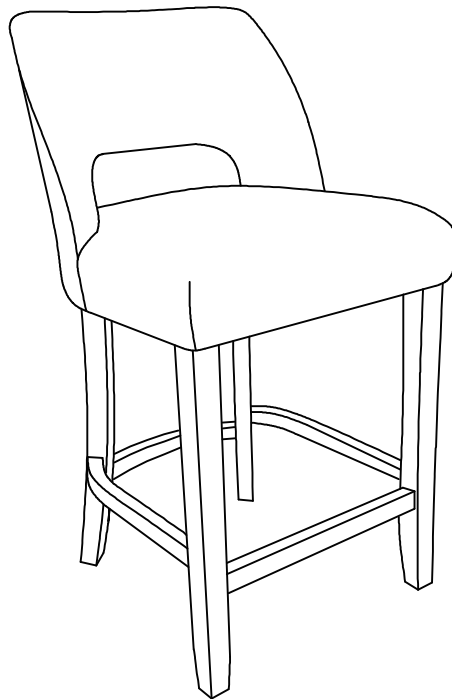

Your bar stool assembly is complete!

CARING FOR YOUR ITEM

Indoor use only

Not contract grade.

Clean using a non-abrasive cloth and a mild cleaner.

Never use harsh chemicals, as they could damage the finish or integrity of the item.

WARNING: CROSSBAR NOT FOR STANDING .

This crossbar is designed for foot support only during seated use. It is not intended to bear weight from standing, climbing, or using as a step. Failure to comply may result in structural damage and personal injury. Weight capacity applies to seat only.

