



Coralais® | K-15182-4RA

Single-handle bathroom sink faucet, 1.2 gpm

Features

- 1.2 gpm (4.5 lpm) maximum flow rate
- 4-3/16" (107 mm) stationary spout reach
- Single Lever handle allows for both volume and temperature control
- KOHLER® ceramic disc valves exceed industry longevity standards for a lifetime of durable performance
- Red/blue indexing on handle
- Temperature memory allows faucet to be turned on and off at the temperature set during prior usage
- Includes metal pop-up drain with 1-1/4" (32 mm) tailpiece
- Coordinates with Coralais faucets, accessories, and showering components to complete your bathroom



Sustainability



1-800-4KOHLER (1-800-456-4537)
Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
8-04-2026 17:03 - US-CA

THE BOLD LOOK
OF **KOHLER**®

Codes/Standards

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.



ADA CSA B651 OBC

ASME A112.18.1/CSA B125.1
NSF/ANSI/CAN 372
NSF/ANSI/CAN 61
DOE - Energy Policy Act 1992
EPA WaterSense®
California Energy Commission (CEC)
NSF/ANSI/CAN 61/NSF/ANSI/CAN 372
ADA
ICC/ANSI A117.1
CSA B651
OBC

Material

- Premium metal construction for durability and reliability
- KOHLER finishes resist corrosion and tarnishing

Recommended Products/Accessories

K-23726 Drain treatment
K-23723 Faucet cleaner

Warranty

See website for detailed warranty information.

KOHLER® Faucet Lifetime Limited Warranty

Technical Information

All product dimensions are nominal.

Handle

Handle Style/Type: Lever

Spout

Spout Reach: 4-9/16" (116 mm)

Drain With Overflow: Yes


Flow Rate

Faucet Flow Rate: 1.2 gpm (4.5 l/min)

Valves

Included Valves: Ceramic disc, Thermostatic, Volume Control



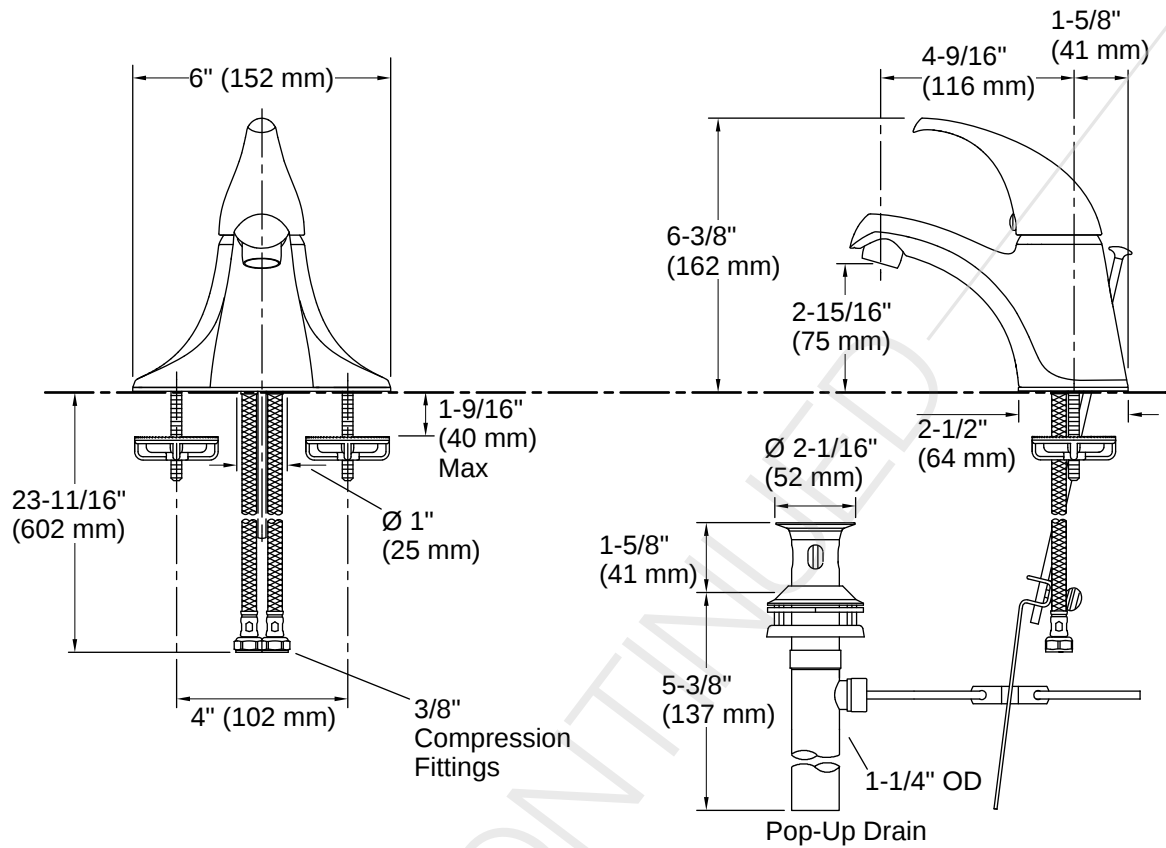

Installation

- Bath- or deck-mount
- Preattached flexible supply lines simplify installation
- Preassembled handle and flexible supply hoses simplify installation
- For 4" (102 mm) centers

Installation Notes

Install this product according to the installation instructions.

ADA complaint for faucet handles only.
ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.

