




Assembly Instruction

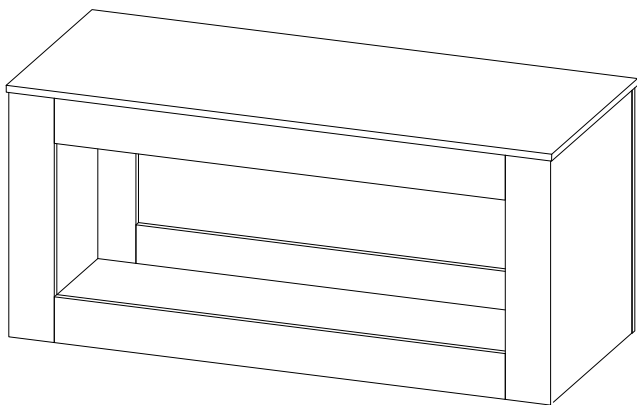

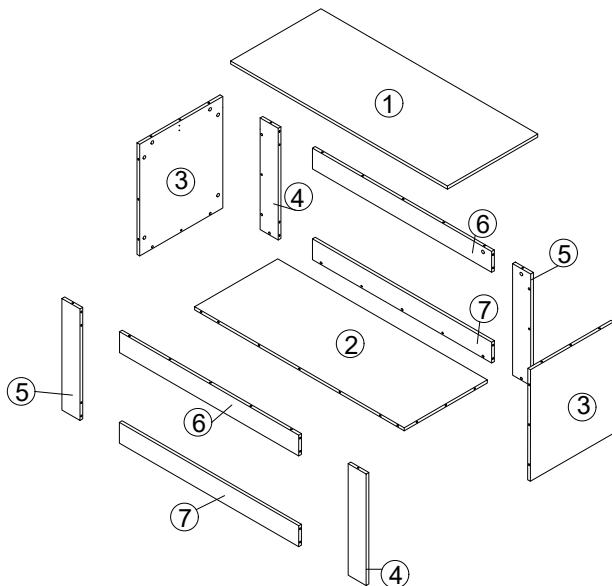

A		M6X26	36
C		Ø8 x 30	16



B		Ø15x11	36
D		Ø8 x 40	16

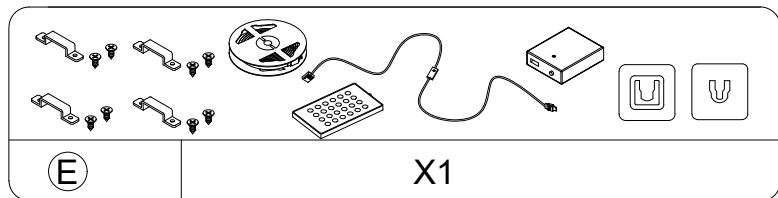

LIGHT
STRIP

Step 1


(Attention: Cam bolt & Insert nut need to be put together)

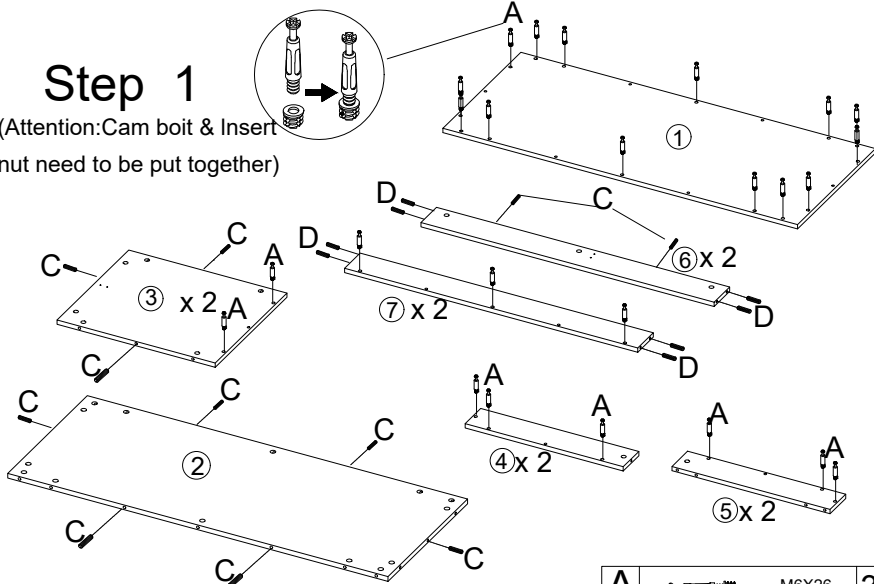

A		M6X26	36
C		Ø8 × 30	16


D		Ø8 × 40	16
---	--	---------	----

Step 2

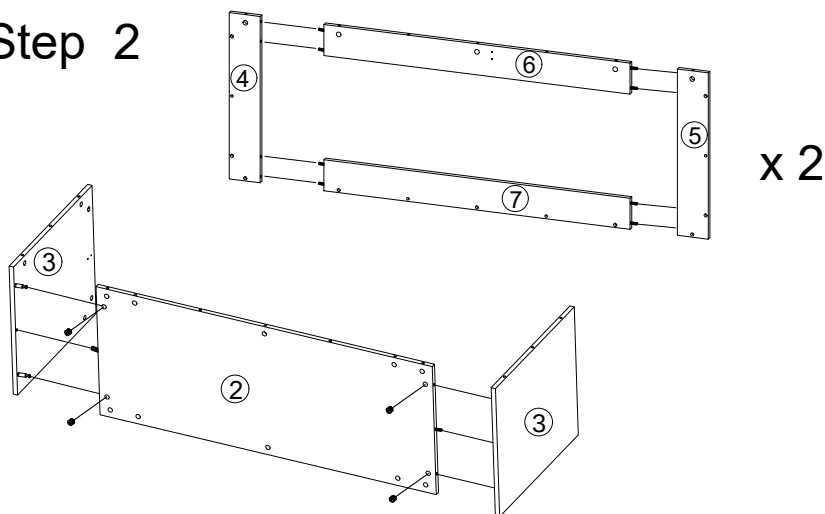


B		Ø15x11	4
---	---	--------	---

Step 3

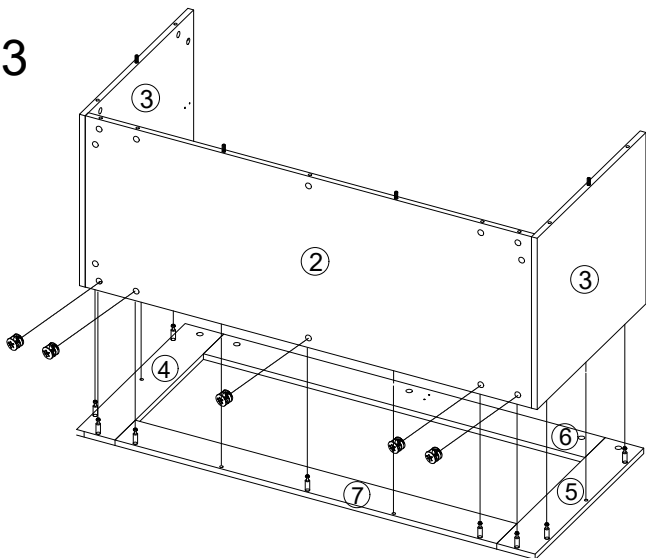



B	 Ø15x11	9
---	--	---

Step 4

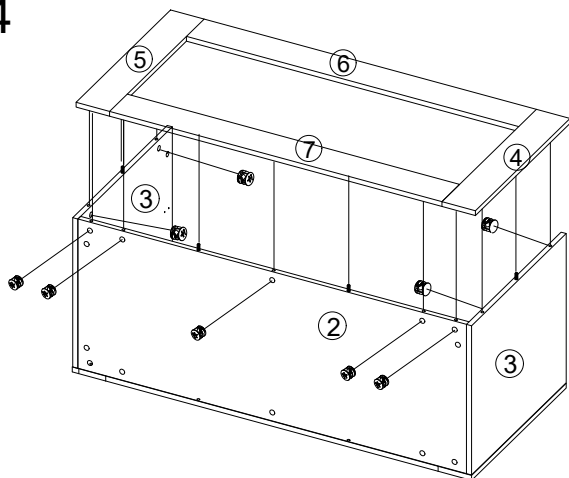


B	 Ø15x11	9
---	--	---


Step 5

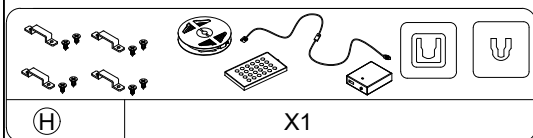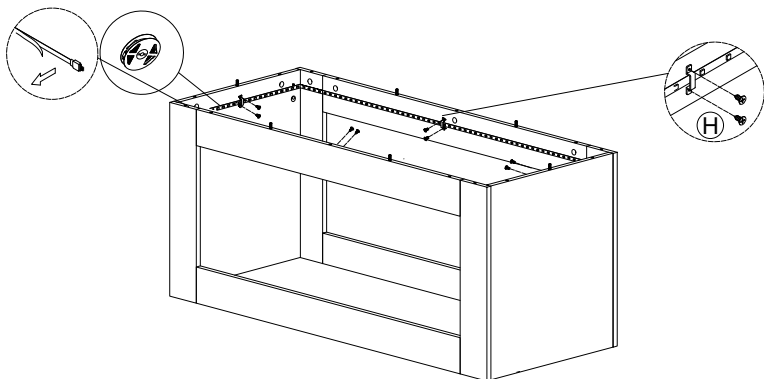


Step 6

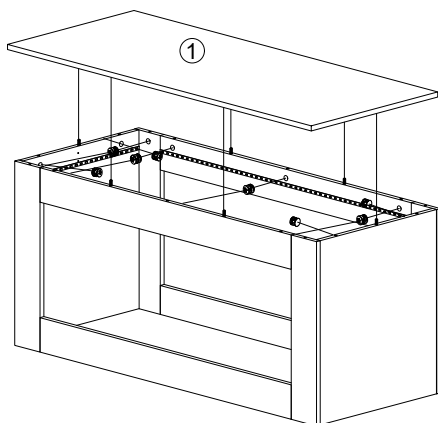

Step 7

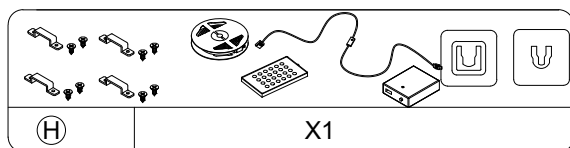


- Connected pin of LED and power adapter to the RGB control box as below.
- Remove the battery protection pad from remote controller. Align remote controller to the RGB Control box to adjust the color mode.Specifications of battery:cr2025 3v

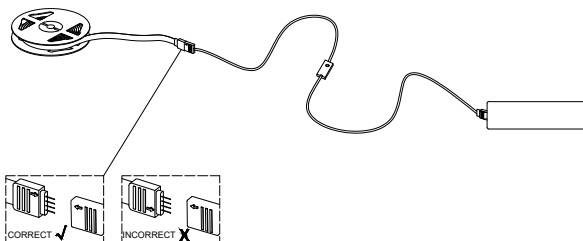

1.Connect the light strip plug to the adapter socket correctly

Step 8

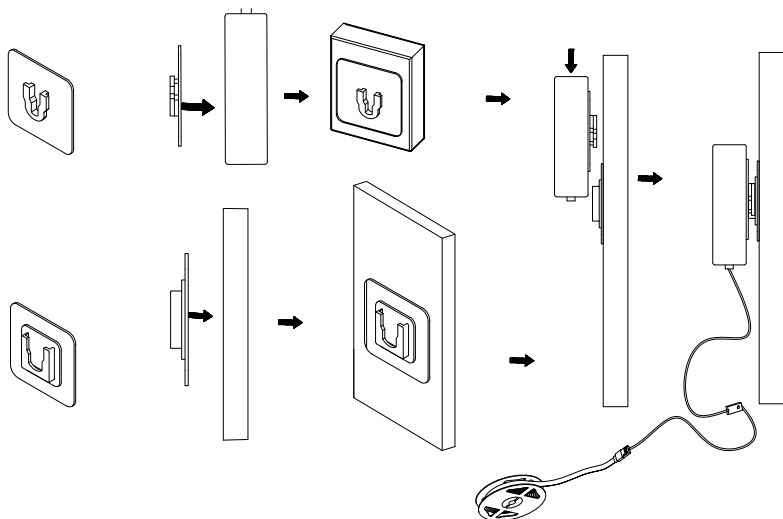

Step 9

