

## IMPORTANT SAFETY INSTRUCTIONS


- To avoid injury or damage, mount only on a surface that is sturdy.
- To avoid electric shock, make sure the electricity is turned off at the main circuit breaker panel. If you are replacing an existing fixture, turn off the following in order: fixture, wall switch, and main fuse or breaker box.

**Note: Some types of fuses must be unscrewed to shut the power off.**

- If you are unclear as to how to proceed, please consult a licensed electrician.


**UNPACK THE FIXTURE:** Check the contents of the box. Box should contain all items on the parts diagram.

## ASSEMBLY INSTRUCTIONS

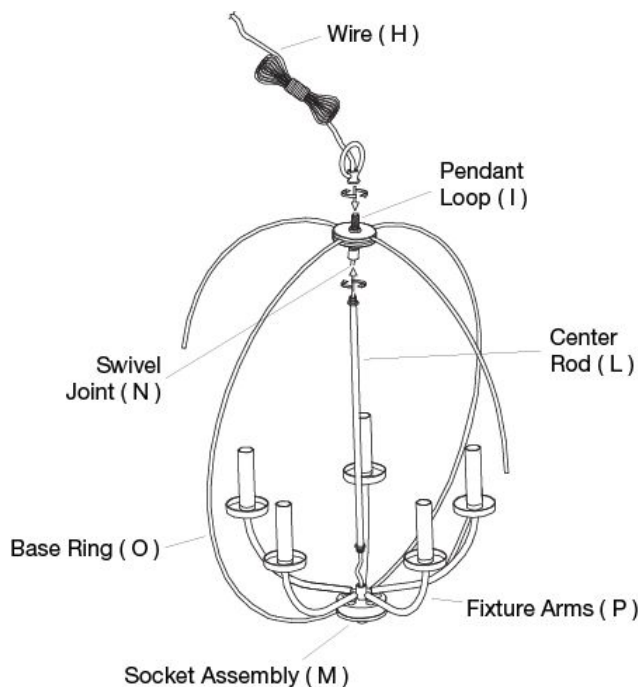


### STEP 1: Create the Chandelier Design

- a. Screw bottom of Center Rod (L) into top of Socket Assembly (M).
- b. Screw top of Center Rod (L) into bottom of Swivel Joint (N). Pull through any excess Wire (H).
- c. Secure Pendant Loop (I) to top of Fixture Body (J) by screwing it in a clockwise direction.
- d. Spread out Fixture Arms (P) and pre-assembled Base Rings (O) to create the chandelier design.

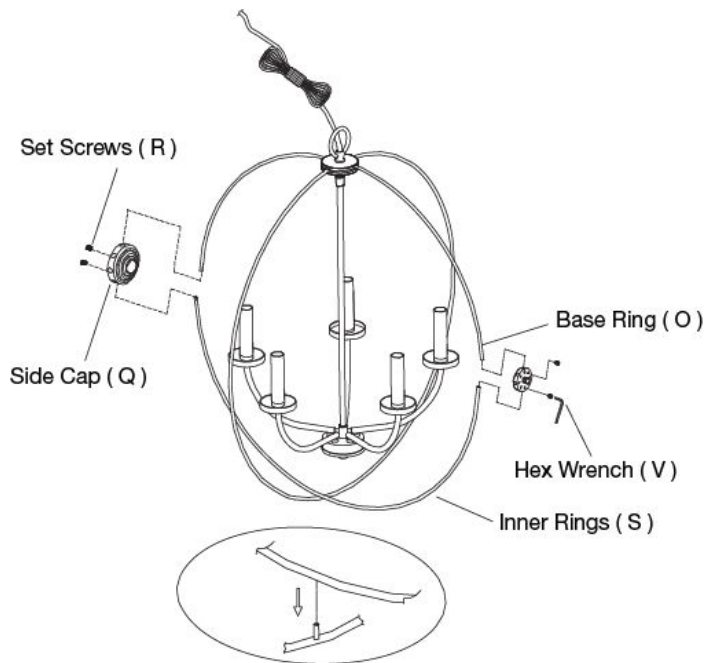


## STEP 2: Attach the Fixture Rings

- Unscrew the cover from Side Caps (Q) to reveal Set Screws (R). With the included Hex Wrench (V), loosen one Set Screw (R).  
**Note: Loosen each Set Screw (R) before inserting the ends of each ring.**
- Insert pre-assembled Base Ring (O) into the hole on Side Caps (Q) ensuring that Set Screws (R) face outwards. Tighten corresponding Set Screws (R) using Hex Wrench (V) provided. Repeat on the other side of Base Ring (O).
- Insert each end of Inner Ring (S) into the bottom of both Side Caps (Q) and tighten Set Screws (R). Insert notch on Base Ring (O) into the hole on the back of Inner Ring (S).

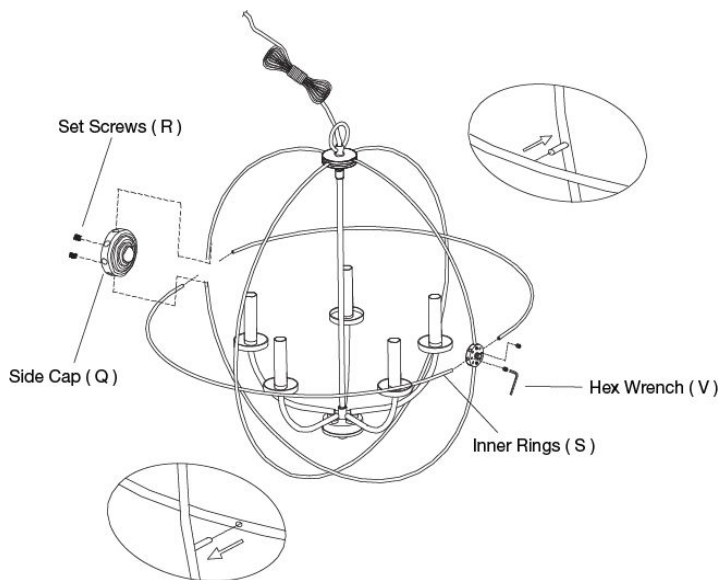


## STEP 3: Attach the Fixture Rings (cont.)

- Secure the remaining Inner Rings (S) into Side Caps (Q) and tighten Set Screws (R) with Hex Wrench (V). Ensure Inner Rings (S) are inside of Base Ring (O).
- Secure Inner Rings (S) to the notches on Base Ring (O).  
**Note: Inner Rings (S) should be installed on the left and right holes on Side Cap (Q).**

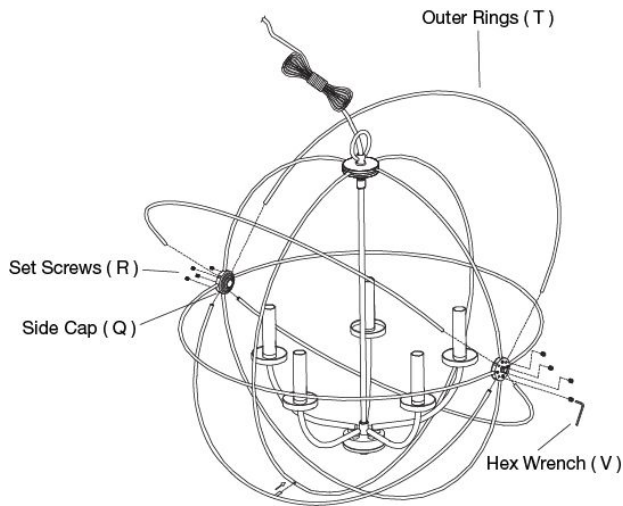

#### STEP 4: Attach the Fixture Rings (cont.)

- f. Secure Outer Rings (T) into Side Caps (Q) and tighten Set Screws (R) with Hex Wrench (V). Ensure Outer Rings (T) are outside of Base Ring (O).
- g. Secure the notches on Outer Rings (G) to the holes on Base Ring (O).

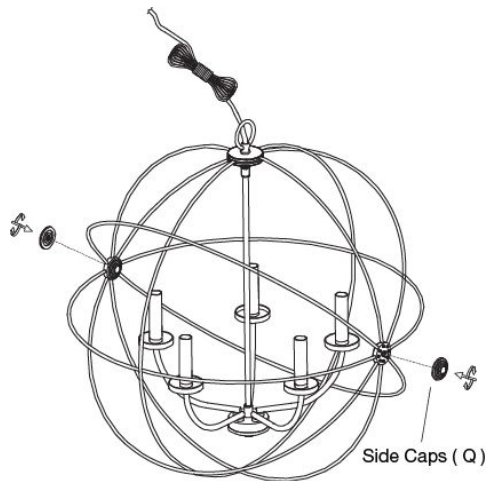


#### STEP 5: Complete Assembly

- a. Screw the covers back on Side Caps (Q).

## INSTALLATION INSTRUCTIONS

1. Secure Mounting Plate (A) to the junction box (not included) using Mounting Screws (B) provided. Ensure the attached Screw Collar Loop (E) is pointing down towards the floor.
2. Remove Threaded Ring (F) from Screw Collar Loop (E) by unscrewing it in a counter-clockwise direction. Set Threaded Ring (F) aside.
3. Place Canopy (D) against the ceiling with Screw Collar Loop (E) protruding through the hole in Canopy (D). Adjust Screw Collar Loop (E) and the hex nut above it until 3/8" of the threaded portion of Screw Collar Loop (E) is visible. Remove Canopy (D) and set it aside.
4. Assemble one end of Chain (G) to Pendant Loop (I) by opening Quick Link (W) closing it around Pendant Loop (I).

5. With chain pliers, remove excess Chain (G) to achieve desired hanging length. Once Chain (G) is to desired length, use wire cutters to cut Wire (H) 10” beyond the length of Chain (G) to allow for easier wire connection.
6. Weave Wire (H) upwards through every 4-5 links in Chain (G).
7. Slide Threaded Ring (F) down Chain (G) and Wire (H) with the raised end (flange) facing up towards the ceiling. Slide Canopy (D) down Chain (G) and Wire (H).  
**Note: Threaded Ring (F) and Canopy (D) will be used to secure the fixture to ceiling at a later step.**
8. Carefully lift the fixture (with the help of a friend). Secure top of Chain (G) to Screw Collar Loop (E) with Quick Link (W).
9. Insert the end of Wire (H) through the hole in Screw Collar Loop (E) into the junction box.
10. Using the wire graph below, connect the appropriate wires from the fixture to the corresponding wires in the electrical junction box (not included) and secure Wire Connectors (C).

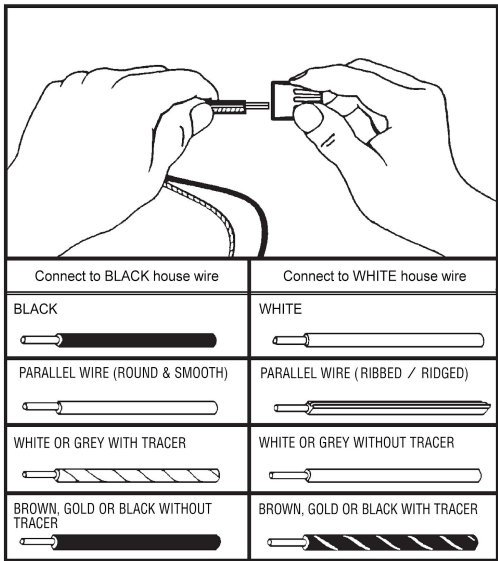

- A. Connect the ground wire (bare copper or green) from your fixture to:
  - 1) the ground wire in the junction box, or
  - 2) the ground screw in the junction box
- B. Connect the BLACK house wire to fixture hot wire that corresponds to diagram (black, round & smooth, white/grey with tracer, brown/gold without tracer).
- C. Connect the WHITE house wire to fixture neutral wire that corresponds to diagram (white, ribbed/ridged, white/grey without tracer, brown/gold with tracer).

11. Place all Wires (H) and Wire Connectors (C) back into the junction box.
12. Slide Canopy (D) and Threaded Ring (F) up Chain (G) and Wire (H). Place Canopy (D) flush against the ceiling and secure in place by screwing Threaded Ring (F) onto Screw Collar Loop (E) in a clockwise direction.
13. Install bulbs (not included) into Socket (K).

Enjoy your new fixture!

**HELPFUL TOOLS:** Safety Goggles, Screwdriver, Wire Cutter/Stripper, Ladder, Chain Pliers

