



Assembly Instruction



Instructions for Use



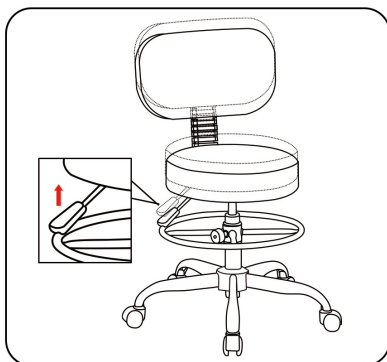

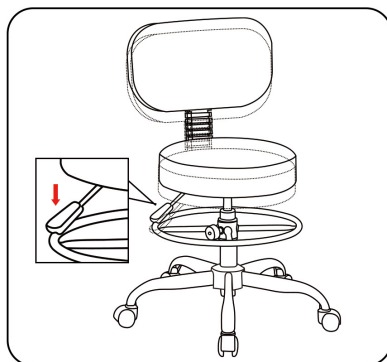









Up adjustment



Down adjustment

Thanks for purchasing our products. Please read this manual before assembly.
And please assemble in order. After the assembly, keep the instruction properly.
Make sure all the parts are included (12 kinds in total).

Accessories List

(1) Backrest 	(2) Seat Cushion 	(3) Split Base Tube 	(4) Central Base Tube 
(5) 5 Castors 	(6) Air Rod 	(7) Foot Ring 	(8) Base Plate 
(9) 5 Screws (M6X20mm) 	(10) 4 Screws (M6X18mm) 	(11) Hexagon Wrench 	(12) Backrest Knob 

Notice


- Firmly secure all parts before use.
- Reconfirm that all parts are secure every 90 days.
- Do not use or store this item or its parts in the proximity of open flame or flammable/combustible chemicals.
- Do not expose this product to water.
- Do not stand on the chair.
- Do not let small children or pets near during assembly.
- Do not use this item in a way inconsistent with the manufacturer's instructions as this could void the product warranty.

Assembly Instruction

Please assemble in a wide and flat place.

Step 1


Take out Split Base Tube (3) and Central Base Tube (4). Insert Split Base Tube (3) into Central Base Tube (4) as shown. You can see there are screw holes. Align with the holes, tighten Screws M6X20mm (9) with Hexagon Wrench (11) to fix 5 Split Base Tube (3) to Central Base Tube (4). Repeat it five times.

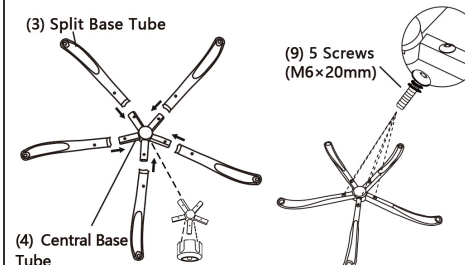

Step 2


Take out Castors (5). Insert Castors (5) into part of Step 1 as shown. There are 5 Castors (5) need to be inserted. Take out Air Rod (6). Put Air Rod (6) into the hole of Central Base Tube (4) as shown.

* Caution: Confirm Castors (5) must be inserted deeply. Otherwise the castors could easily fall out and the chair could fall down.

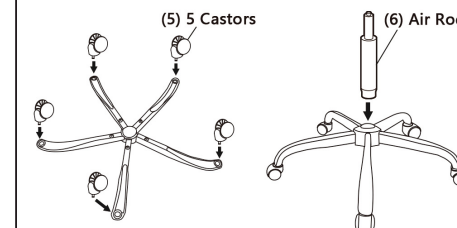

Step 3


Insert the Foot Ring (7) into the assembled Air Rod (6) at your desired height. But at least one inch from the top of the outer circle of Air Rod (6) as shown. Please follow the shown direction of the arrow to tighten the knob by hand on the Foot Ring (7) until the Foot Ring (7) is fixed. Put it aside and we'll use it in Step 6.

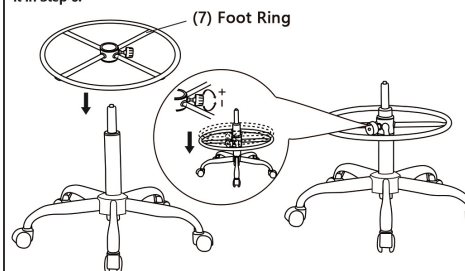

Step 4


Fix Base Plate (8) to the bottom of Seat Cushion (2). Tighten the Screws M6X18mm(10) with Hexagon Wrench (11) firmly.

* Caution: There is a FRONT sticker on the front of Seat Cushion (2).

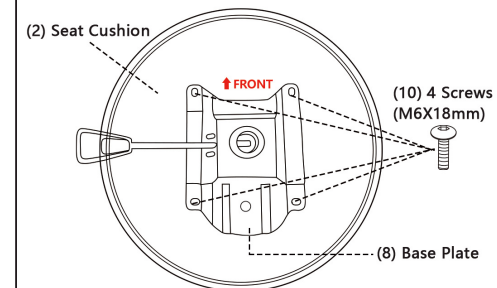


Step 5

Use the Backrest Knob (12) to link the Backrest (1) to the Seat Cushion (2) until the Backrest (1) is secured.

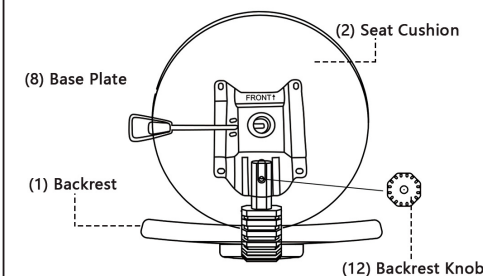

Step 6



Pick up the Step 3's Air Rod (6) and Central Base Tube (4). Insert the Air Rod (6) into Step 5's Base Plate (8). There's a hole in the middle of Base Plate (8). Press the Seat Cushion (2) from top to bottom, use your whole body's strength to insert it firmly, the assembly is complete now.