


INSTALLATION MANUAL

CHANDELIER

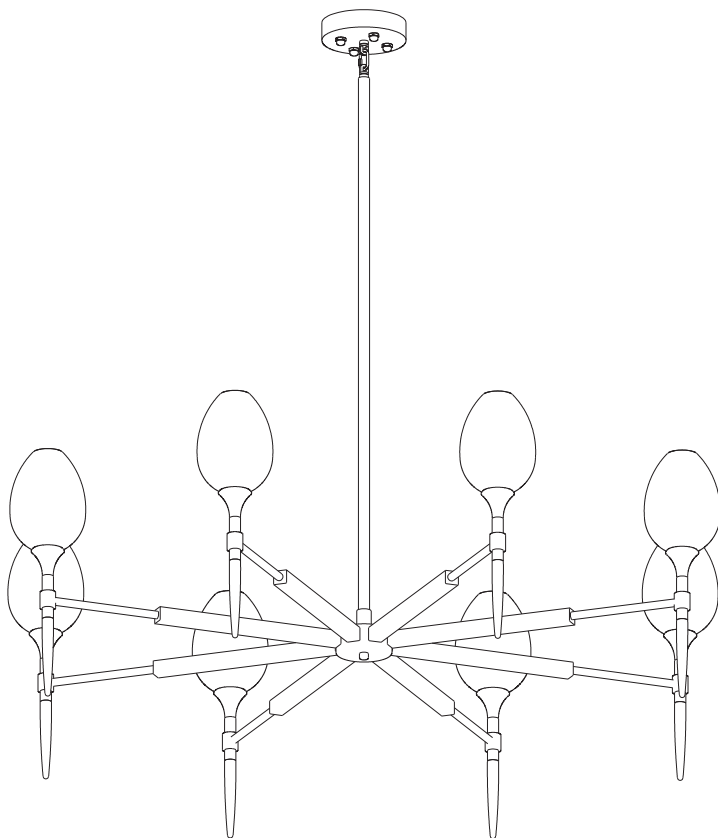

Safety Rules

WARNING: BE SURE THE ELECTRICITY TO THE WIRES YOU ARE WORKING ON IS SHUT OFF; EITHER THE FUSE IS REMOVED OR THE CIRCUIT BREAKER IS TURNED OFF. TURNING THE POWER OFF USING THE LIGHT SWITCH IS NOT SUFFICIENT TO PREVENT ELECTRICAL SHOCK.

NOTE: The important safeguards and instructions appearing in this manual are not meant to cover all possible conditions or situations that may occur. It must be understood that common sense, caution, and care, are factors which cannot be built into any product. These factors must be supplied by the person(s) installing this unit.

READ & SAVE THESE INSTRUCTIONS

CAUTION: Before assembling the lighting fixture, refer to the section titled Wiring Connections. If you feel you do not have enough electrical wiring experience, either refer to a do-it-yourself wiring handbook or have your lighting fixture installed by a qualified, licensed electrician.

INSTALLATION & OPERATION INSTRUCTIONS GENERAL

Before starting the installation, disconnect the power by turning off the circuit breaker or by removing the appropriate fuse at the fuse box. Turning the power off using the light switch is not sufficient to prevent electrical shock.

All electrical connections must be in accordance with local and National Electrical Code (NEC) standards. If you are unfamiliar with proper electrical wiring connections, obtain the services of a qualified electrician.

Outlet Box Reminder




If using an outlet box for installation, a reinforced outlet box must be used. This type of box can support 70–150 lbs (31.7–68 kg) and must be securely mounted to the ceiling beams.

Installation Preparation


Tools You Need




☒ Ladder




☒ Pliers




☒ Wire Strippers



☒ Screwdrivers



☒ Wrench



☒ Power Drill
(optional)




☒ Drill Bit
(optional)

What to Expect with your Installation








☒ Check the box to see the weight of the light



☒ Angled ceiling applicable

Packing List


 A Mounting Bracket x 1  B Canopy x 1  C 18" Downrod x 2  D 12" Downrod x 2  E Central Box x 1  F Lamp Arm x 8  G Bottom Rod x 8  H Crystal Shade x 8	AA2x  Outlet Box Screw		BB5x  Wire Nut	
	CC4x  Wood Screw		DD4x  Washer	
	EE4x  Anchor Bolt		FF1x  Figure-8 Wire Clip	
	GG1x  Main Power Cord		HH1x  Gloves	

Note: The listed quantity is for installation, extra hardware maybe included.

Installation Instructions

1. Remove the Mounting Bracket

Loosen the knurled nut from the canopy (B), and take out the mounting bracket (A).

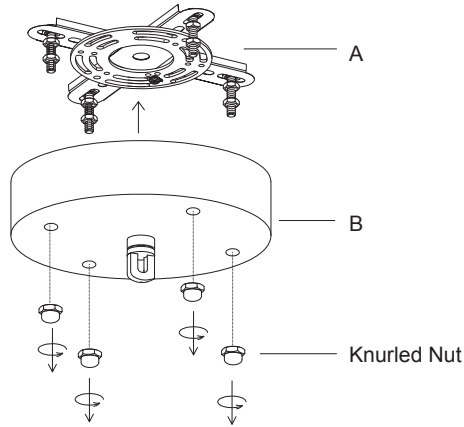


2. Mount the Bracket (3 Options)

Option 1. (For Outlet Box)


Step 1: Secure the mounting bracket (A) to the outlet box with screws taken off from outlet box or screws (AA) provided.

Step 2: Secure the ends of the bracket on the ceiling with washer (DD) and wood screw (CC).

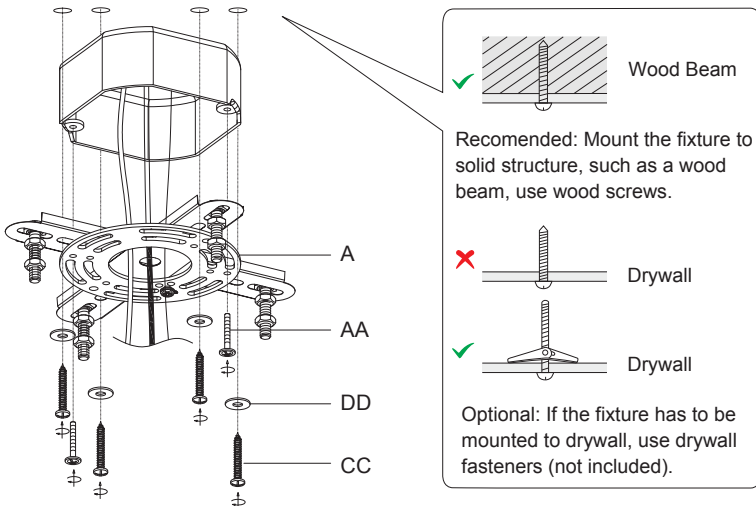


Option 2. (For Solid Wood Structure)



Mark and drill the screw holes (Use a 1/8" drill bit) on the solid wood structure. Mount the mounting bracket with washers (DD) and wood screws (CC).

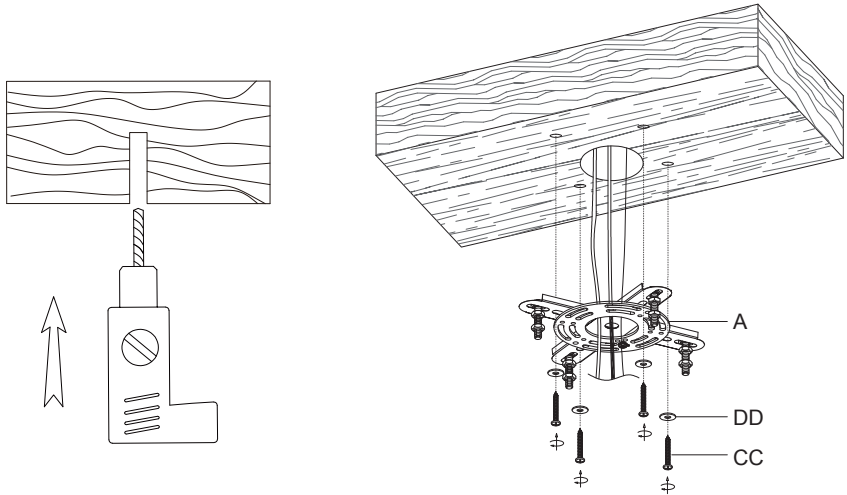

Option 3. (For Concrete Structure)


Mount the mounting bracket to the concrete structure with anchor bolt (EE).

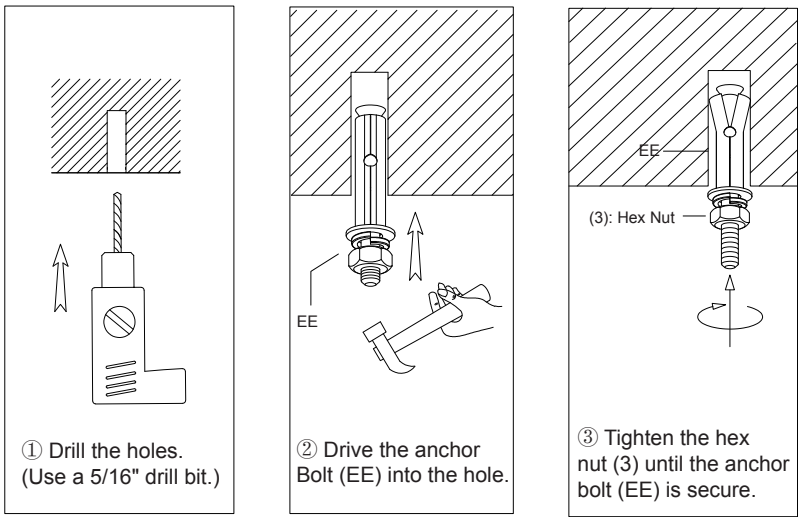

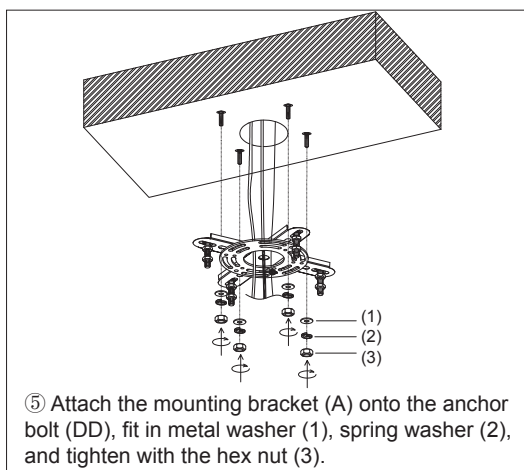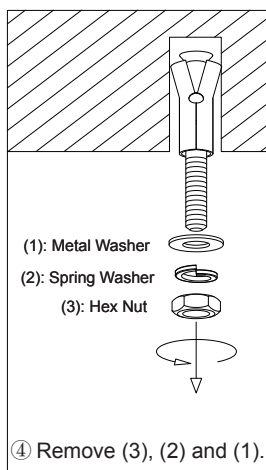


3. Assemble the Lamp Body


Step 1: Loosen the cap nut and remove the cover from the central box (E).



Step 2: Loosen the hex nut and spring washer of the lamp arm (F).

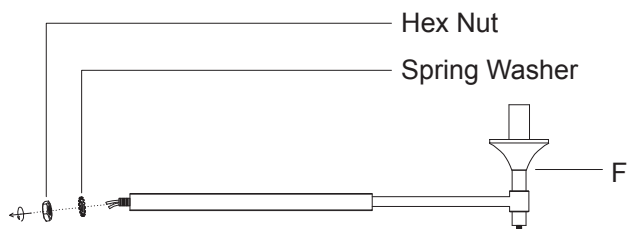


Step 3: Attach the lamp arm (F) onto the central box (E), and secure it with spring washer and hex nut.

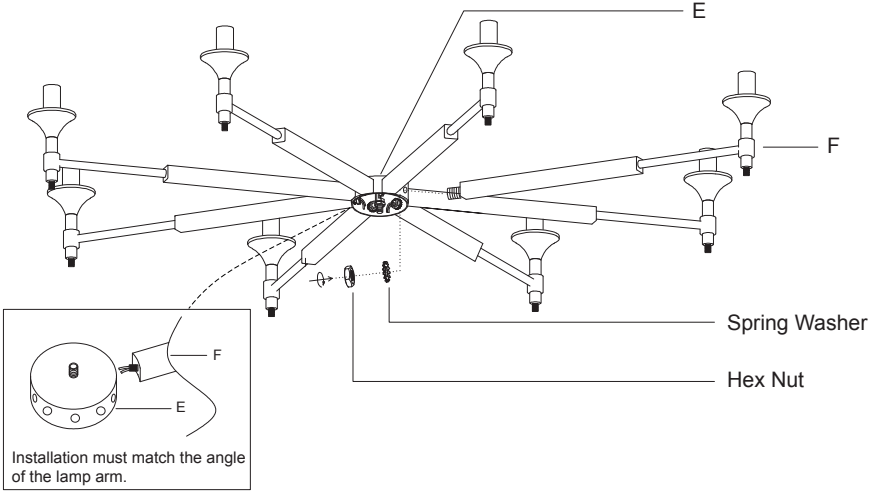


Step 4: Pass the main power cord (GG) through the center box (E) and tidy them with a figure-eight buckle (FF).

Step 5: Connect the wires of the lamp arm to the lower ends of the main power wires with wire nut (BB). (L to L, N to N).

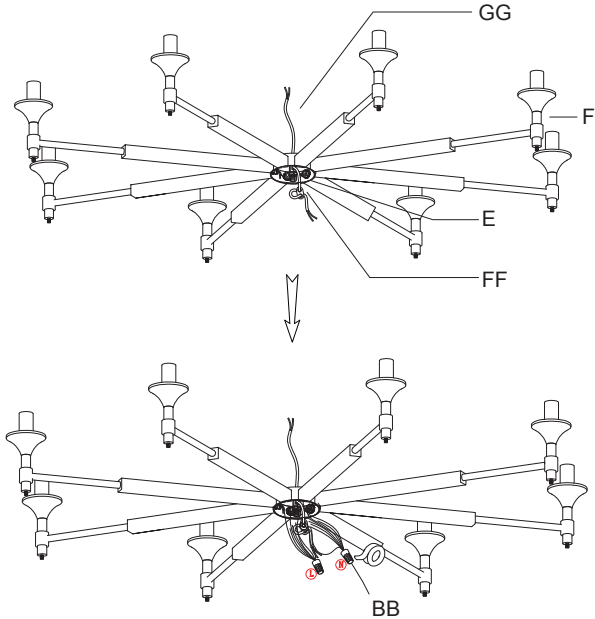

Step 6: Fix the base to the central box (E) with cap nut.

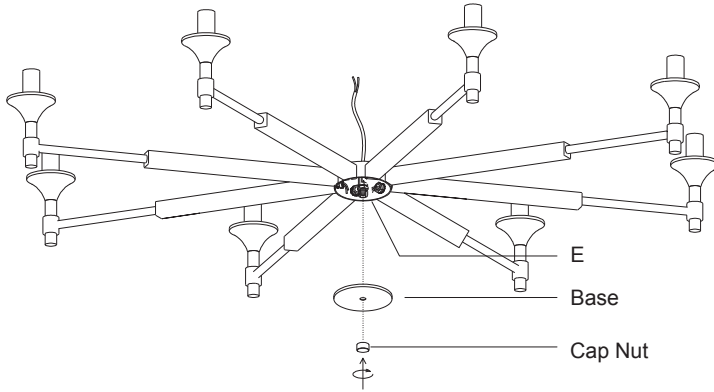


4. Install the downrod

Step 1: Pass the main power cord (GG) through the downrod (C/D) and canopy (B).

Step 2: Screw the downrod (C/D) onto the lamp body.


Step 3: Open the quick link, then connect the canopy (B) and downrod (D). Tighten the quick links securely.

Note: Select the number of downrod (C/D) based on your desired height.

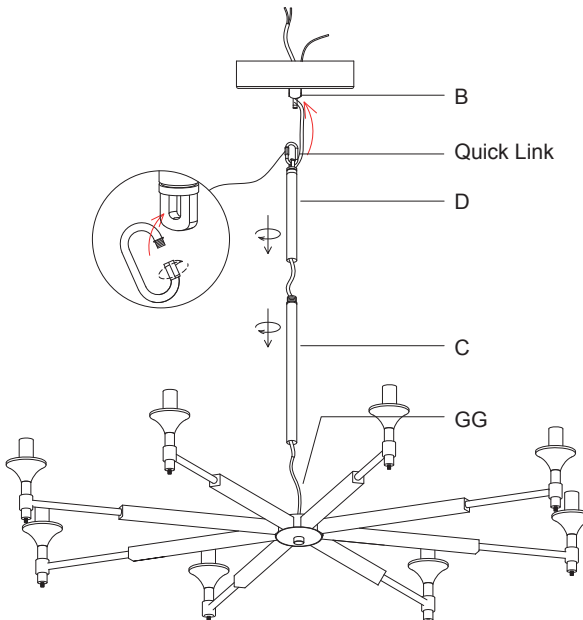


5. Connect the Wires

Connect the wires from the fixture to the house supply wires with wire nuts (BB), ground wire (green, green/ yellow, or bare copper) to ground wire, neutral wire (white) to neutral wire, and hot wire (black) to hot wire. Wrap the connection with electrical tape.

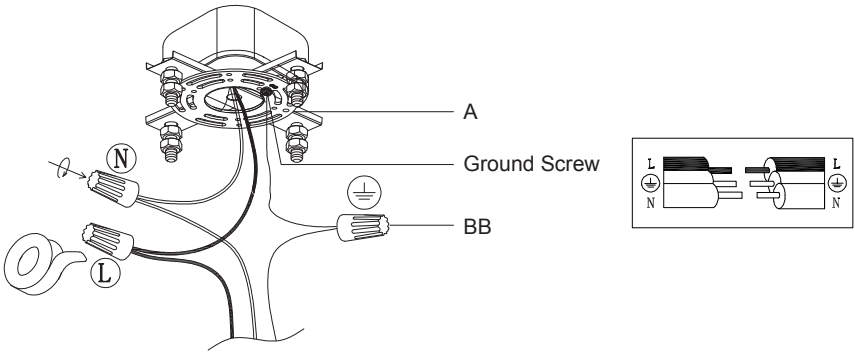

6. Fix the Canopy


Fix the canopy (B) onto the mounting bracket (A) with knurled nut.

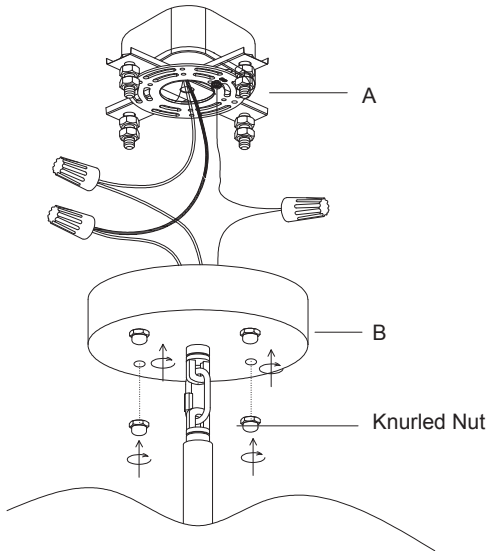

7. Install the Bottom Rod and Bulbs

Step 1: Screw the bottom rod (G) onto the bottom of the lamp arm (F) and tighten it.

Step 2: Install the Bulbs. (For proper fitting, it is recommended to use T25 led bulbs, Max 7W each, not included)

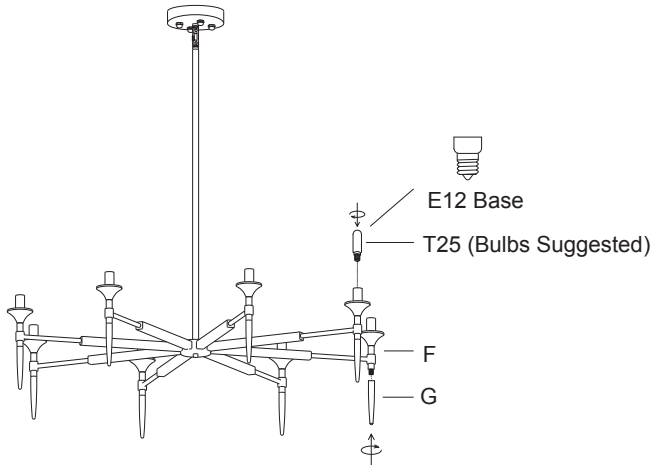


Note:

To achieve dimming functionality, you need to use dimmable bulbs and a dimmer switch.

For bulbs with color temperature control, repeatedly switch “on” and “off” using the wall switch to change settings.

8. Install the Crystal Shade

Install the crystal shade (H) on the lamp arm (F).

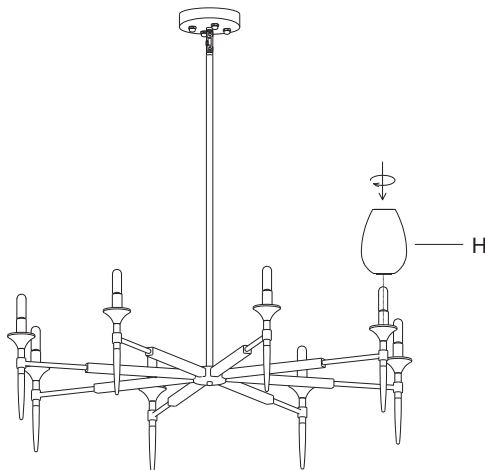

Troubleshooting

1. Missing / Broken Parts

- Make a list of the missing/broken parts according to the packing list, take photos for broken parts, then email us for free replacements.

2. Bulbs Do Not Light Up

- Check your power and switch to make sure it's power on.
- For regular bulbs, make sure it is connected to the ON/OFF wall switch, not the dimmer switch.
- Replace the bulb with a new one.

3. Bulbs Flicker

- If it is a dimmer switch, use a dimmable bulb.
- Replace the bulb with a new one.

4. Could Not Install / Assemble

- Take photos of the ceiling / fixture, contact seller for technical support.

Clean And Care

To clean, wipe fixture with soft cloth. Spray from chemical cleaners can discolor the finish of fixture. Do not use scouring pads, powders, steel wool or abrasive paper to clean this fixture.

Ordering Parts

Keep this manual for future reference, and in case replacement parts are needed. Available parts can be ordered from place of purchase. Use exact wording from diagrams when ordering parts.