

## SPECIFICATIONS:

### DESCRIPTION

Wall-mounted ADA-compliant sconce featuring handcrafted glass.

### MOUNTING

Installs directly to a 4" octagonal outlet box. 75°C supply wire required for incandescent lamping. Top of glass is approximately 3.625" above the outlet box centerline.

### LAMPING

Standard lamping shall be 75W max A19. Energy-efficient compact fluorescent options include standard non-dimmable with electronic ballasts or self-ballasted GU-24 types. (Lamps not included)

Consult factory for other configurations (including TBX-type lamps)

### CONSTRUCTION

Glass is secured to the backplate by braided wire. Rectangular backplate (nominal 4" W x 6.5" H) shall be constructed of steel, powder-coated white.

### DIFFUSER

Diffuser shall be glass, in various decor options.

### METAL FINISH

Decorative metal accents shall be in various finish options.

### LABELS


UL listed. Suitable for Damp Locations (interior use only).



708380-SN


## ORDERING:

Fixture/Decor Style	(Lamping Option)	Metal Finish
708307 Opal Matte	(blank) Incandescent	BK Black
708380 Amber	E1 1x 18W Quad 120V	BR Bronze
7083VM Vanilla Matte	N1 1x 18W Quad 277V	CR Chrome
	W1 1x 18W GU-24 120V	SN Satin Nickel
		WH White

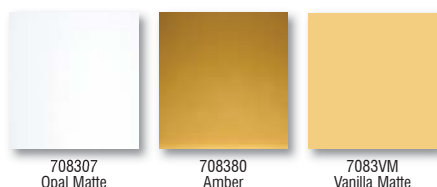

### Lina:

1x 75W A19 or CFL Options



Note: Open-top design

### Project Information:

Glass dimensions provided are nominal. Allowance must be made for dimensional tolerance in handcrafted glasses.

REVISED 11/08