


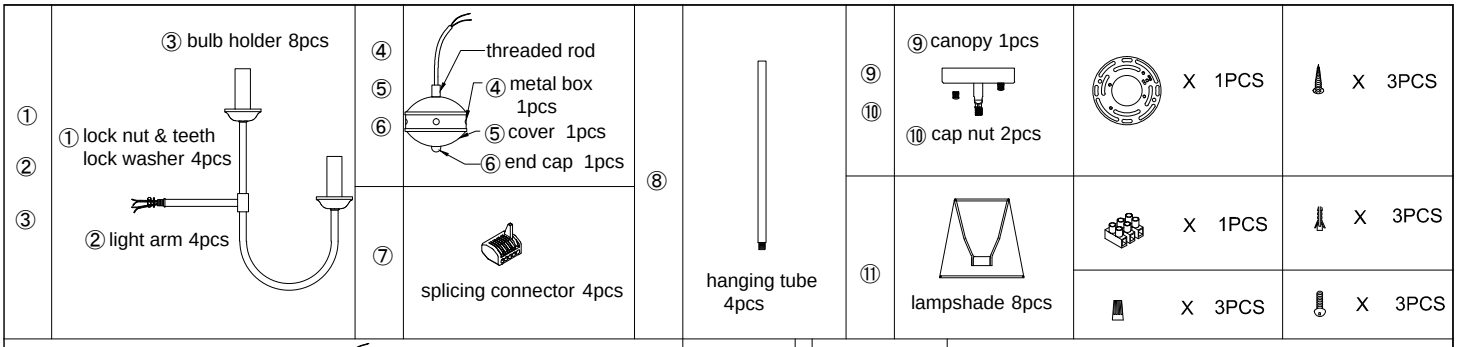





1. Loosen and remove out the end cap ⑥ and cover ⑤ from metal box ④.




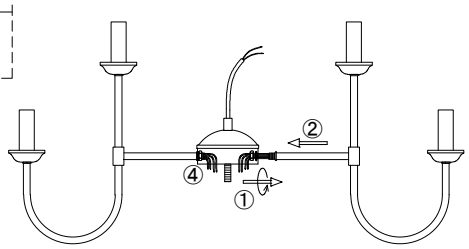


2、Install the light arm ② to the metal box ④ with lock nut & teeth lock washer ①.(don't tighten the lock nut until all light arms are ready installed to the metal box ④, adjust the arms even and rotate to fasten the lock nuts at last)

1.Pull the orange operating handle A to open the inlet hole, insert the wire B.
2.Press the operating handle A to finish wiring.(Note: one inlet hole can put 2 or 3 wires inside)




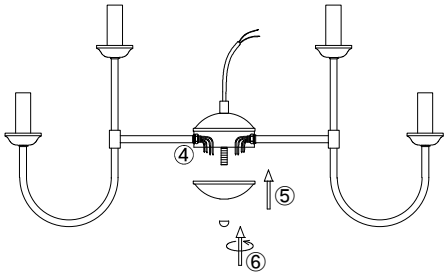


3.Connect all the wires by parallel with connectors ⑦ (all live line-L use one connector, and neutral Line-N use another connector) .
4. Close back the cover ⑤ to the box ④ with end cap ⑥.

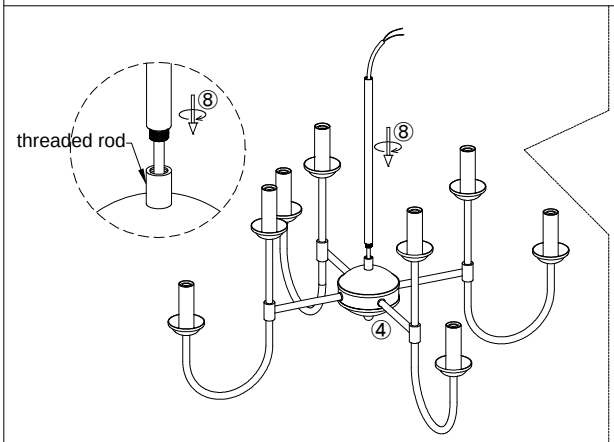


5.Rotate to install the tube ⑧ to the light fixture.(can connect more tubes to get the height you need)




can connect more tubes to get the height you need)

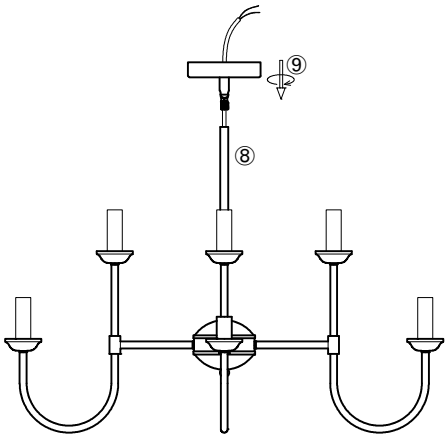

6. Install the canopy ⑨ to the fixture .



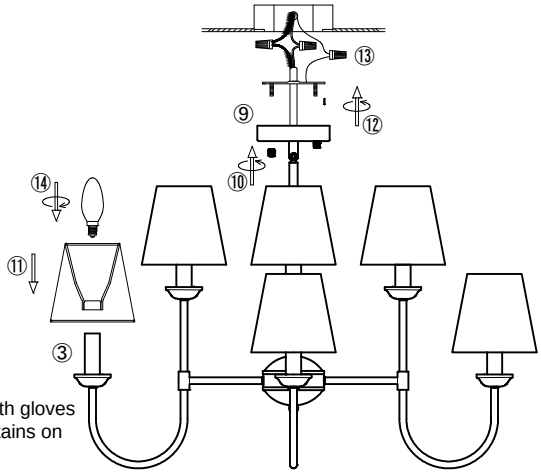

Please operate with gloves to avoid leaving stains on the lampshade.

7. Install the bracket to the ceiling junction box with screw ⑫.
8. Connect the wire to your home line with cap connector ⑬.
9. Install the fixture to the bracket with cap nut ⑩.
10. Put the lampshade ⑪ to the bulb holder ③ and install the bulb ⑭.(bulbs are not included in the package).

Please read carefully before installation!!!
Note : Please make sure that the electricity is powered off during installation !
Only a professional electrician should install this kind of product !