### **CARE AND MAINTENANCE**

Spot clean using a mild water-free solvent. Only a professional cleaner should undertake a complete overall cleaning.

The use of steam or water-based cleaners may cause excessive shrinking or staining.


## **NOTICE**

- \* Please make sure that you have all parts indicated before you begin assembly of this item.
- \* This item should be assembled on a soft surface to prevent scratching the finish during assembly.
- \* This item may require periodic tightening.

# **Part List and Hardware List**

| PIECE | DESCRIPTION     | PICTURE    | QUANTITY |
|-------|-----------------|------------|----------|
| А     | TOP PANEL       |            | 1X       |
| В     | LEFT PANEL      |            | 1X       |
| С     | RIGHT PANEL     |            | 1X       |
| D     | DIVIDER         |            | 1X       |
| E     | BOTTOM ASSEMBLY |            | 1X       |
| F     | BACK PANEL      |            | 1X       |
| G     | LEG FRAME       |            | 2X       |
| Н     | CENTER LEG      |            | 2X       |
| 1     | BASE FRAME      |            | 1X       |
| J     | DRAWER FRONT    | <u>···</u> | 2X       |
| K     | DRAWER LEFT     |            | 2X       |
| L     | DRAWER RIGHT    |            | 2X       |
| М     | DRAWER BACK     |            | 2X       |
| N     | DRAWER BASE     |            | 2X       |

Product Dimensions: 42"W x 15"D x 31"H



WARNING: DO NOT OVER TORQUE BOLTS/SCREWS


| DOL 10/001 | VETTO .                |           |          |  |
|------------|------------------------|-----------|----------|--|
| PIECE      | DESCRIPTION            | PICTURE   | QUANTITY |  |
| 1          | 30 MM BOLT             | M6x30mm   | 10X      |  |
| 2          | 15 MM BOLT             | M6x15mm   | 2X       |  |
| 3          | SPRING WASHER          | 0         | 4X       |  |
| 4          | FLAT WASHER            | 0         | 6X       |  |
| 5          | 1 1/4" FLAT HEAD SCREW | M3x32mm   | 16X      |  |
| 6          | 3/4" FLAT HEAD SCREW   | M3x19mm   | 8X       |  |
| 7          | 5/8" FLAT HEAD SCREW   | M3x16mm   | 10X      |  |
| 8          | CAMBOLT                |           | 18X      |  |
| 9          | CAMLOCK                | <b>3</b>  | 18X      |  |
| 10         | MACHINE SCREW          | M4x25mm • | 4X       |  |
| 11         | HANDLE                 |           | 2X       |  |
| 12         | WOODEN DOWEL           |           | 12X      |  |
| 13         | WEDGE                  | <b>®</b>  | 10X      |  |
| 14         | ALLEN KEY              |           | 1X       |  |

Before beginning assembly of product, make sure all parts are present. Compare parts with package contents list and hardware contents list.

If any part is missing or damaged, do not attempt to assemble the product.

Estimated Assembly Time: 60 minutes.

Tools Required for Assembly : Phillips Screwdriver

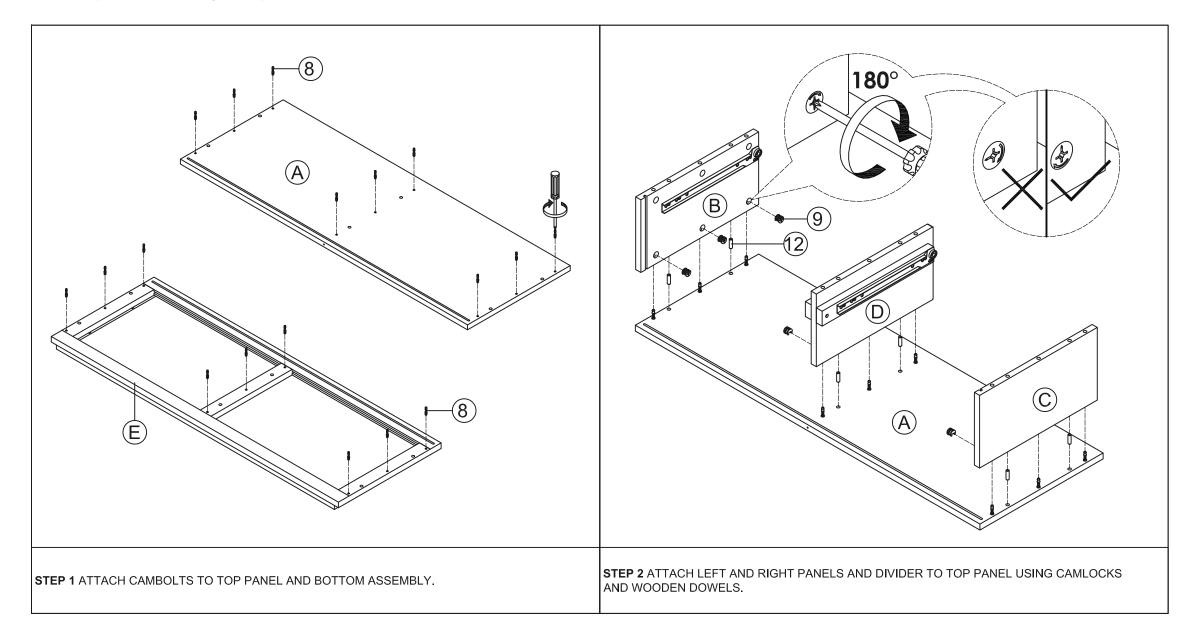


Before beginning assembly of product, make sure all parts are present. Compare parts with package contents list and hardware contents list.

If any part is missing or damaged, do not attempt to assemble the product.

Estimated Assembly Time: 60 minutes.

Tools Required for Assembly : Phillips Screwdriver

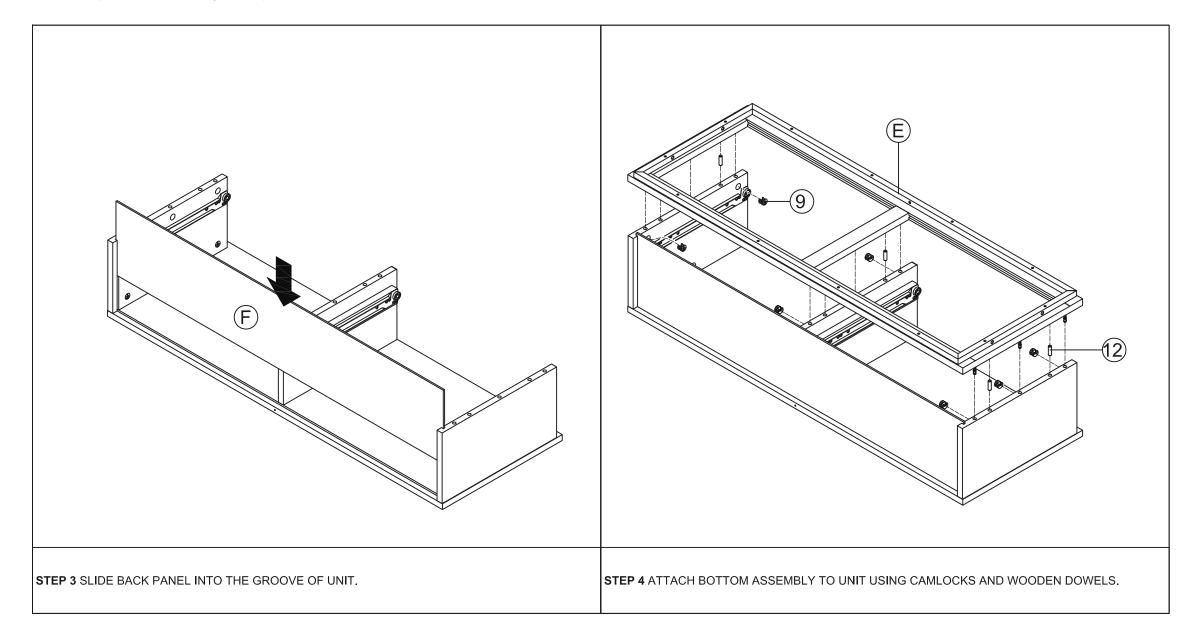


Before beginning assembly of product, make sure all parts are present. Compare parts with package contents list and hardware contents list.

If any part is missing or damaged, do not attempt to assemble the product.

Estimated Assembly Time: 60 minutes.

Tools Required for Assembly : Phillips Screwdriver

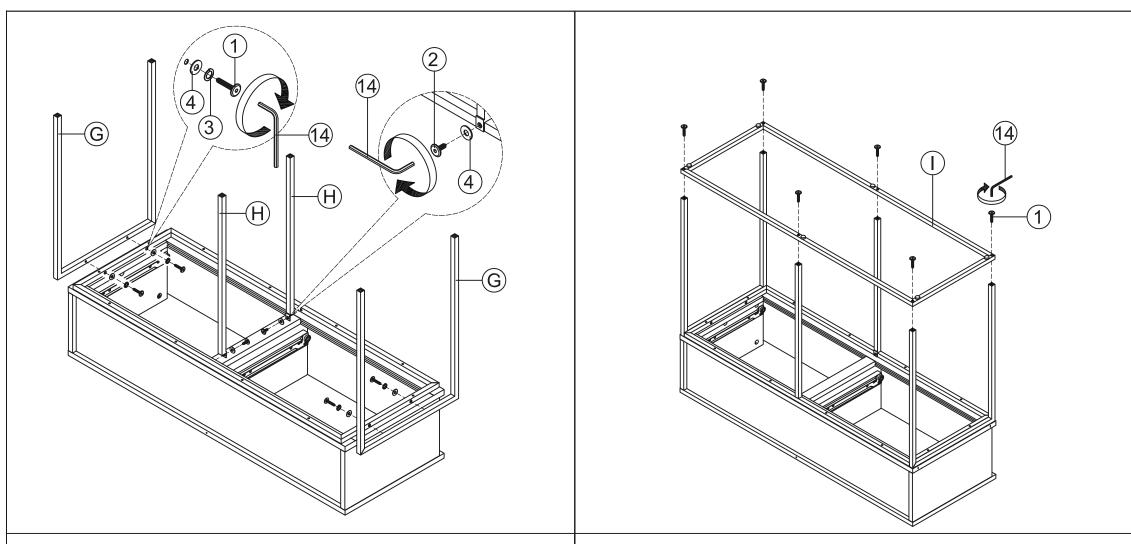

STEP 5 ATTACH LEG FRAMES AND CENTER LEGS TO UNIT USING 30 MM BOLTS, 15 MM BOLTS, SPRING WASHERS AND FLAT WASHERS. TURN BOLTS USING ALLEN KEY.

NOTE: DO NOT OVER TIGHTEN THE BOLTS.

STEP 6 ATTACH BOTTOM LEG TO UNIT USING 30 MM BOLTS. TIGHTEN BOLTS USING ALLEN KEY. NOTE: TIGHTEN ALL BOLTS COMPLETELY USING ALLEN KEY FROM STEP 5.


YOUR UNIT.

Before beginning assembly of product, make sure all parts are present. Compare parts with package contents list and hardware contents list.

If any part is missing or damaged, do not attempt to assemble the product.

Estimated Assembly Time: 60 minutes.

Tools Required for Assembly : Phillips Screwdriver

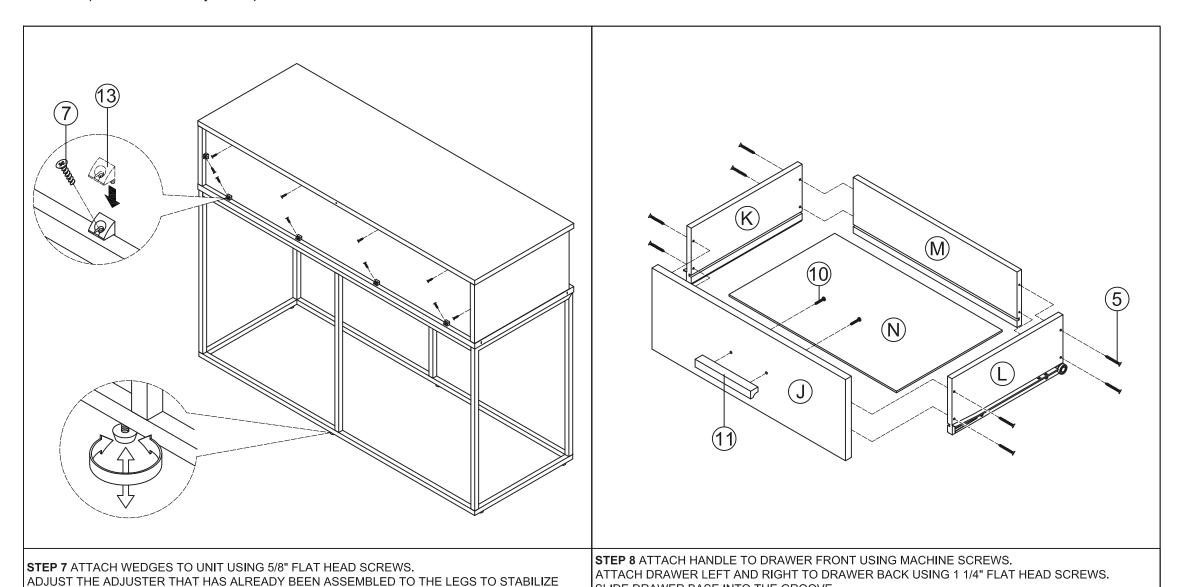

SLIDE DRAWER BASE INTO THE GROOVE.

ATTACH DRAWER FRONT TO DRAWER LEFT AND RIGHT USING 1 1/4" FLAT HEAD SCREWS.

Before beginning assembly of product, make sure all parts are present. Compare parts with package contents list and hardware contents list.

If any part is missing or damaged, do not attempt to assemble the product.

Estimated Assembly Time: 60 minutes.

Tools Required for Assembly : Phillips Screwdriver

