Before Getting Started

- Read the instructions carefully prior to installing the product.
- When you open the package with a sharp tool like a cutter knife, be careful not to damage the components inside.
- Carefully remove all packaging materials and retain for future use.
- Keep all hardware parts and packaging out of reach of small children.
- Choose a clean, level, spacious assembly area. Avoid hard surfaces that may damage the product.
- Ensure that you have all required contents for complete assembly.
- Take care when lifting. Assemble the product in close proximity to where you intend to position the item.

WARNING: -Risk of suffocation! Keep any packaging materials away from children.
-Make sure power is completely off at the fuse box.
-Have your fixture installed by a qualified licensed electrician.

Cleaning & Maintenance

- For respective shade surfaces, use the appropriate cleansers, i.e. glass cleaner, acrylic polish, and wood polish.
- Clean with soft cloth and a mild detergent. DO not use abrasive cleaner.
- Periodically (every 90 days) make sure that the screws are fully tightened.
- Prolonged exposure to heat sources may cause glazing, melting and scorching, or even cause color to fade.

NOTE



Always use UL recognized wire connectors for connections.



For indoor or outdoor application.




Suitable for damp locations.

ilucezzo

INSTALLATION SHEET

640888-021

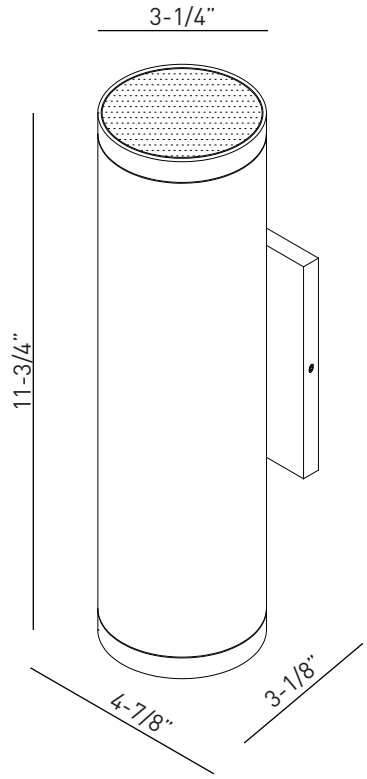

ZHONGSHAN GUZHEN LCZ LIGHTING & ELECTRICAL EQUIPMENTS FACTORY
NO.480, DONGAN NORTH RD., GUZHEN, ZHONGSHAN, GUANGDONG, CHINA
TEL: 86-760-22310601


ADDITIONAL PARTS (included)




Mounting Screw (x2) | mounting plate (x1) | Wire Nut (x3) | Screw (x2) | Allen Key (x1)

INSTALLATION INSTRUCTIONS


1 Install mounting plate to junction box with mounting screws supplied. Make sure black and white wires of junction box run through the middle opening of the mounting plate.

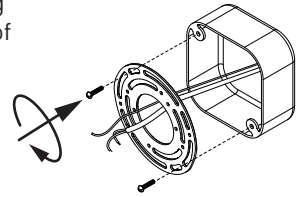

2 Remove the circular backplate and two lampshades from fixture.

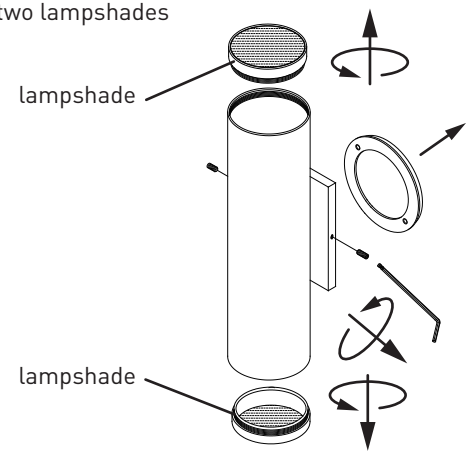


3 Fix the circular backplate onto the mounting plate with the supplied screws.

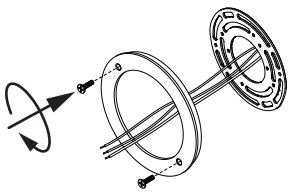


4 To make the connections in the compartment: use the included wire nut to match the white wire from the line feed with the white wire from the fixture, repeat with black wire and then connect copper wire (ground) to the green wire. (see connection details)

CONNECTION DETAILS

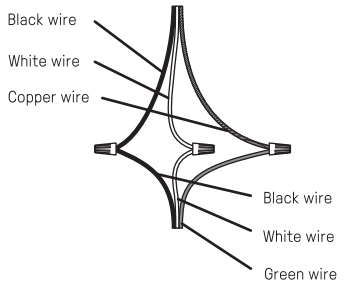


5 Secure the fixture onto the circular backplate using the 2 screws.

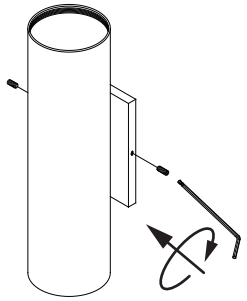

6 Install 12W Max. type LED A19 bulbs (not included) into sockets.
Note: For better light output, recommend to use with LED bulb PAR20 or A19.

7 Twist the lampshades onto the fixture.

Note: To prevent moisture from entering the electrical junction box and causing a short, seal around the top and side perimeter between the fixture and the wall surface with weather resistant caulking. The space at the bottom should be left un-caulked to prevent moisture build up (This step is discretionary instead of mandatory).

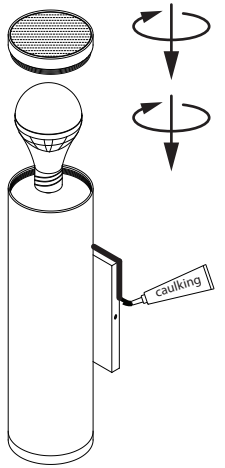

ilucezzo

ZHONGSHAN GUZHEN LCZ LIGHTING & ELECTRICAL EQUIPMENTS FACTORY
NO.480, DONGAN NORTH RD., GUZHEN, ZHONGSHAN, GUANGDONG, CHINA
TEL: 86-760-22310601