

# Assembly Instruction

**Tools Required:** Flathead screwdriver, Phillips screwdriver, pliers, wire cutters, wire strippers, electrical tape, safety glasses.

**Light Source:** (4) A19 Medium Base Bulbs 100W Maximum  
or (4) Medium Base Vintage Bulbs are recommended but not supplied.

**Estimated Assembly Time:** 20-30 minutes

**Preparation:** Identify and inspect all parts before beginning installation. Check package content list and diagrams below to be sure all parts are present. If any parts are missing or damaged, do not attempt to assemble, install, or operate the fixture. Contact customer service for replacement parts.


## ⚠ Warnings and Cautions

Turn off electricity at circuit breaker or main fuse box before installation. Consult a licensed electrician if in doubt.

These instructions are provided for your safety. It is very important you read them completely before installing the fixture. We strongly recommend that a licensed, professional electrician perform the installation.


Disconnect fixture from power source before replacing bulbs. Make sure bulbs are given sufficient time to cool before removal.

## Package Contents

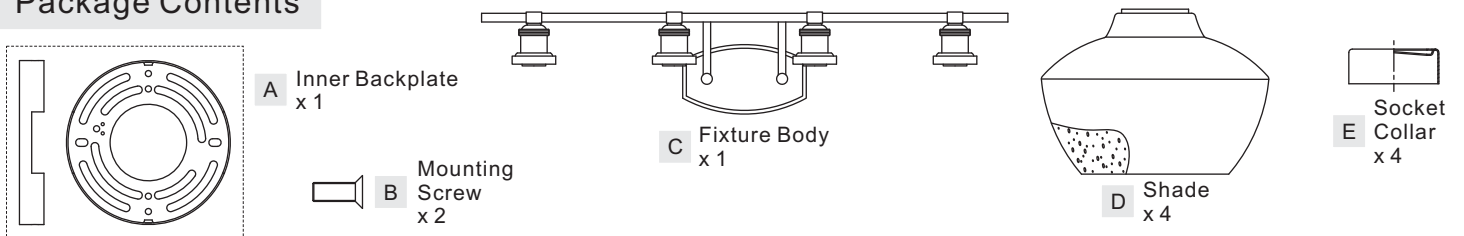


### STEP 1 - Install Inner Backplate

A. Pass the supply wires and ground wire through the Inner Backplate (A). Attach Inner Backplate (A) to Outlet Box with the side mounting holes on the top and bottom. Secure it with Outlet Box Screws (not included). Tighten until snug with screwdrivers.

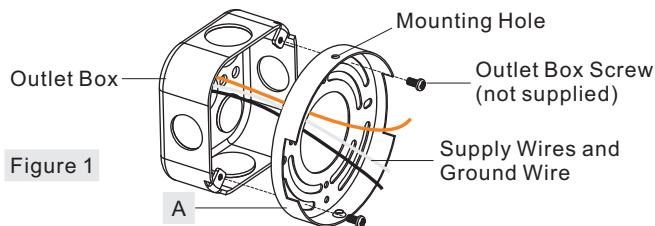


### STEP 2 - Wire Connections

A. Use standard wire connectors (not included) to make all wire connections. Twist connectors until wires are tightly joined together. Wrap each connection with approved electrical tape and carefully stuff all the connected wires into the Outlet Box.

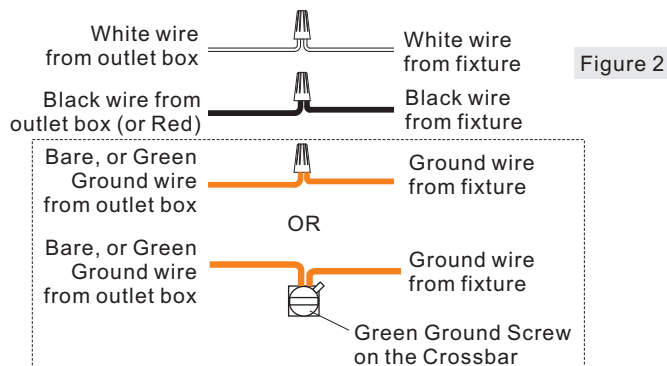

### STEP 3 - Install Fixture Body


A. Place the Fixture Body (C) over the Inner Backplate (A) and secure with Mounting Screws (B). Hand tighten until snug with screwdrivers.

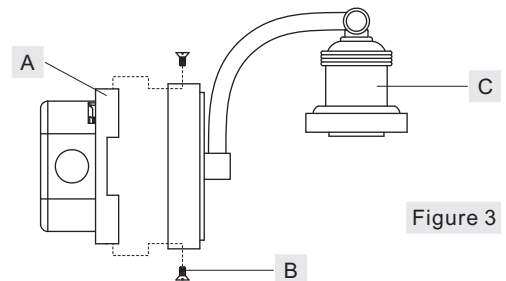

### STEP 4 - Install Shades and Bulbs

A. Place Shade (D) over Socket and secure with Socket Collar (E). Hand tighten until snug.  
B. Insert bulbs onto sockets and screw snugly into place.

Your fixture is now assembled and ready to use. Enjoy!

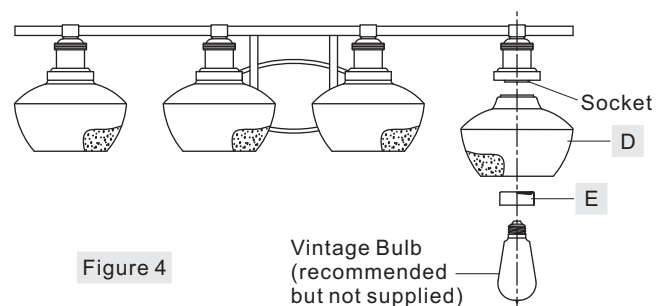

NOTE: ALL DIMENSIONS ARE ROUNDED UP TO THE NEAREST 1/4"

FINISH: BRUSHED NICKEL

