

# INSTRUCTION MANUAL



# 01/PACKAGE LIST


(1) Back Cushion x1




(2) Seat Cushion x1




(3) Arms x2



(4) Seat Plate x1




(5) Gas Lift x1



(6) Star Base x1



(7) Casters x5



(8) Bolts M6x14mm x5



(9) Bolts M8x25mm x4



(10) Bolts M6x25mm x3



(11) Bolts M6x30mm x5



(12) Bolts M5x16mm x3



(13) Headrest x1



(14) Hanger x1



(15) Decorative Piece x2




(16) Wrench x1




\*Note: One extra screw for each model is included in the package. In addition, the decorative piece also added one more. Ensure that our customers do not experience the lack of accessories.

# 02/ASSEMBLY INSTRUCTION

**Step 1:** Turn the Star Base (6) upside down, then press the Casters (7) into the holes at the end of each base leg.

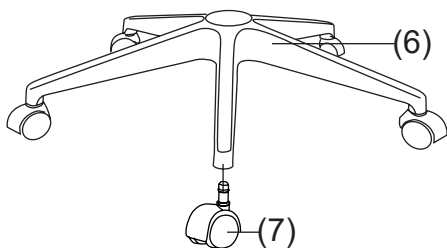


**Step 2:** Turn the Star Base upright and insert the Gas Lift (5) into the center hole of the Star Base.

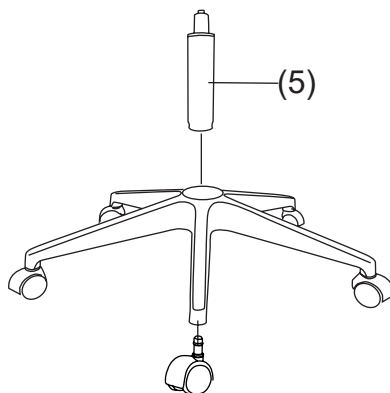


**Step 3:** Attach the Arms (3) to the seat cushion with two M6x25mm bolts (10) and four M6x30mm bolts (11), using the Wrench.

*\*Note: Arm rests are labeled with an "L" (left) or "R" (right) to show which sides they should be placed on.*

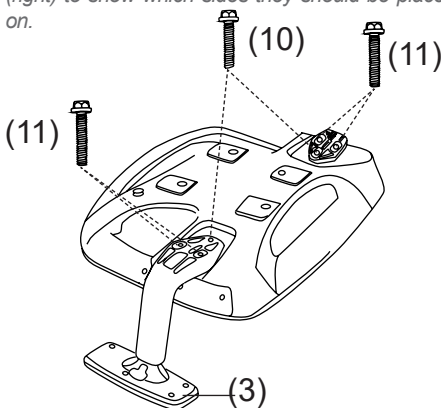


**Step 4:** Align the Seat Plate (4) to the bottom of the seat cushion, make sure that the front of the seat plate is facing the front of the seat cushion. Attach the seat plate to the seat cushion using four M6x14mm bolts (8), tighten all the bolts with the wrench.

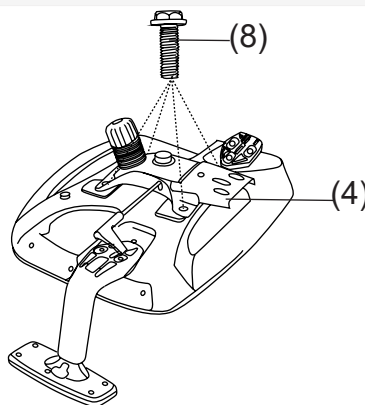


# 02/ASSEMBLY INSTRUCTION


**Step 5:** Attach the Back Cushion (1) to the seat cushion, Insert the back cushion to the seat plate, and using three M8x25mm bolts (9), tighten all bolts with the wrench.

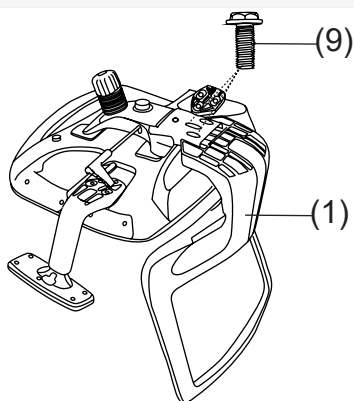


**Step 6:** Turn the seat cushion upright and align the center hole of the seat plate over the lift, then push the seat cushion down onto the lift firmly until the connection is secure.

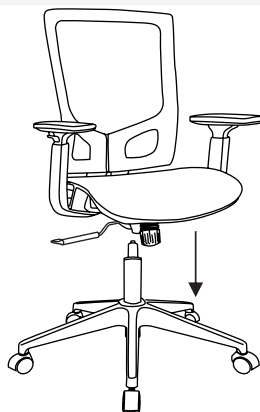

**Step 7:** Insert the Headrest (13) to the top of back cushion.

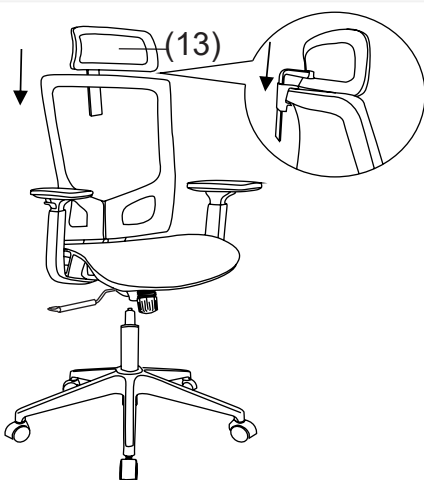


**Step 8:** Attach the Hanger (14) to the back of the Headrest, and using two M5x16mm bolts (12), tighten all bolts with the wrench. Buckle the Decorative Piece (15) to cover the screw holes.

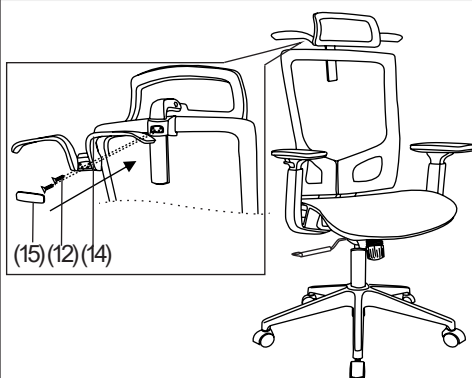

## 02/ASSEMBLY INSTRUCTION

Step 9: Adjust the balance , then fully tighten all the bolts on each side.

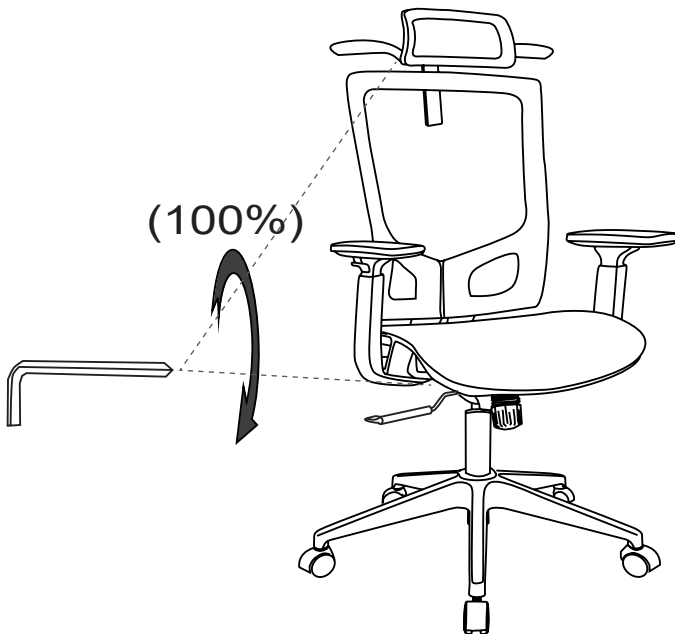

**Congratulations! You've assembled  
your chair.**

# 03/INSTRUCTIONS FOR USE

## 1 Seat Height: Paddle-shaped lever on right side



### **To raise:**

*While taking your weight off chair, lift lever up.*




### **To lower:**

*While seated, lift lever up.*

*\* At the proper height, your feet should rest flat on the floor.*

## 2 Tilt Tension: Long stem under the seat cushion with knob

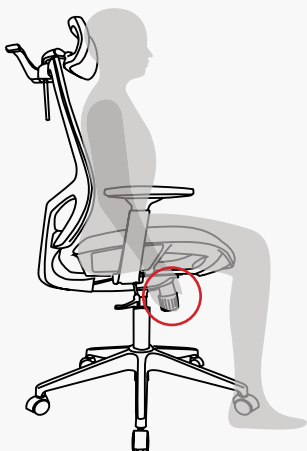

### **To increase tension:**

*While seated, turn knob forward (toward + sign).*




### **To decrease tension:**

*While seated, turn knob backward (toward - sign).*

*\* Set the tilt tension to control the resistance you feel when leaning back.*

# 03/INSTRUCTIONS FOR USE

## 3 Tray Function: 3 angles can be locked

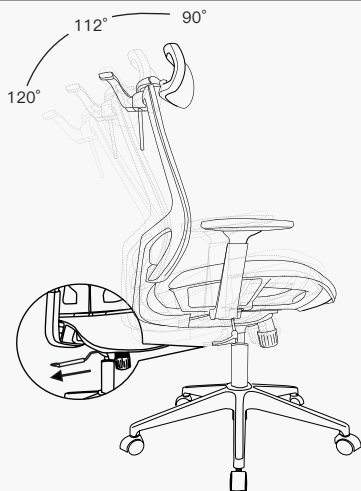

### **Lock to 90°:**

*When you work, you can adjust it to the most comfortable angle.*

### **Lock to 112°:**


*The angle of the second lock. It is convenient for you to choose the angle that suits you.*

### **Lock to 120°:**

*When you read, you can adjust it to this angle.*

\* (The lift function and the angle lock function are the same handle. When using the angle lock, the handle must be pulled out to be used.)

## 4 1D Multi-Function Armrest

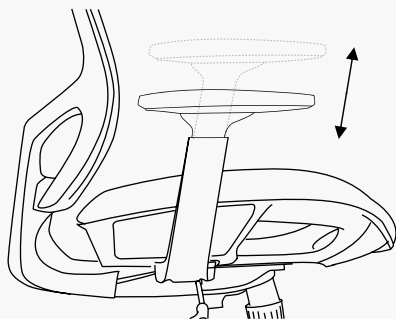

**Up and down**