



# Coffee Table Assembly instructions


Ø27.6 h12.6 Inch/ Ø70 h32 cm

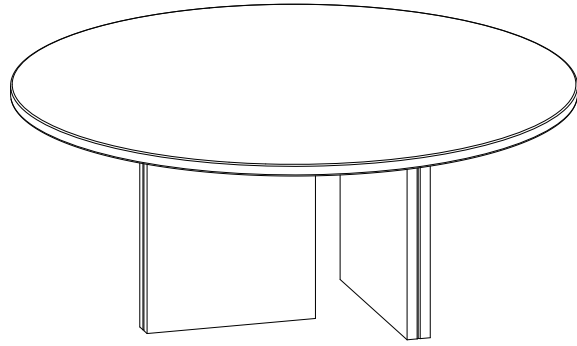


1. Upon opening the carton, you will find the accessory pack on the top layer. The pack contains 8 washers, 8 screws, and 1 hex key. Remove the accessory pack and take out the top foam layer.

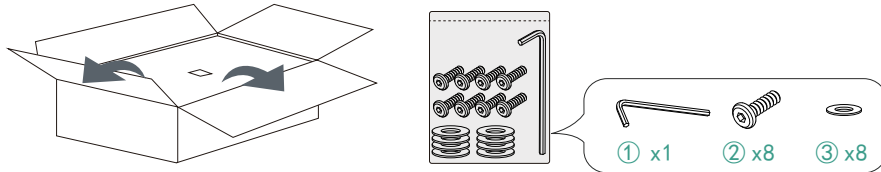



2. After removing the top foam layer, you will see 2 table legs. Take out the legs and place them gently metal-side down on a soft surface.

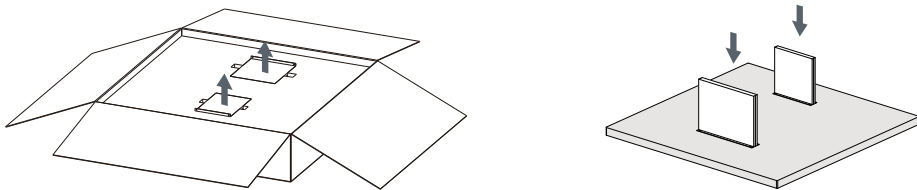


3. Remove the second foam layer (where the legs were stored) to locate a removable circular foam plug. Take out the plug to reveal the tabletop. Remove the outer protective foam around the tabletop to fully expose it.

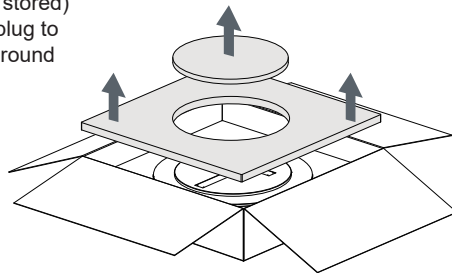

4. Lift out the tabletop: **At least two people must lift the tabletop gently.**

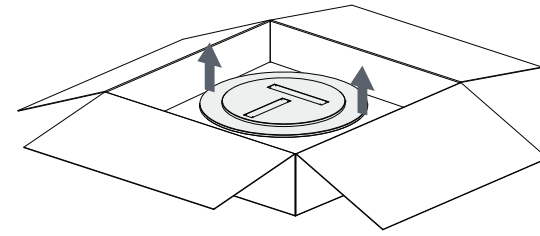

5. After removing the tabletop, place it face-down on the first foam layer for assembly. Do not place it directly on hard surfaces to avoid scratches or damage.

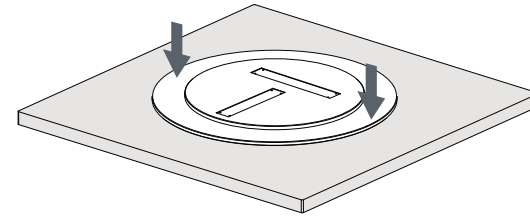

6. Position the 2 legs on the corresponding areas of the tabletop's underside. Secure the screws by first placing the washers, then tightening the screws. Flip the table upright once all screws are fastened.

