



INSTALLATION INSTRUCTION

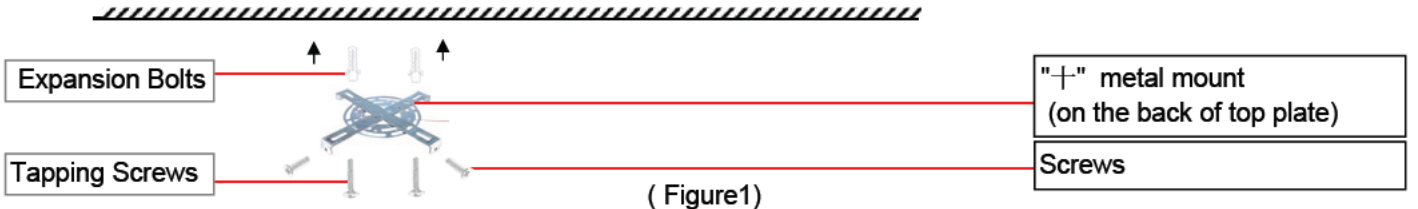


(Figure1)

Please refer to the detailed instructions on page 2 for installation of metal mount

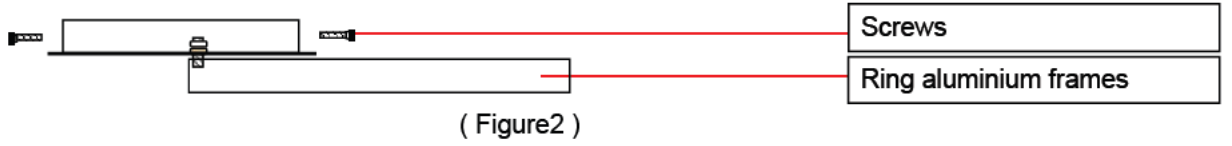


(Figure2)

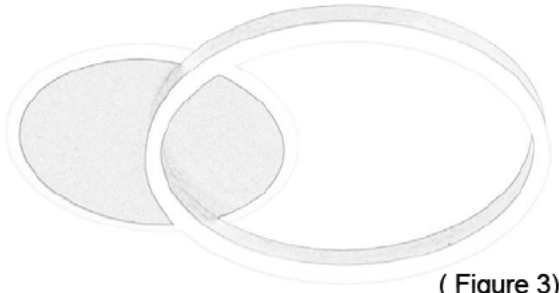

(Figure 3)

Combine the frames:
Put the screws on the wire into the hole of top plate and lock the nuts.
Please note that 2 screws are required for the ring frame.

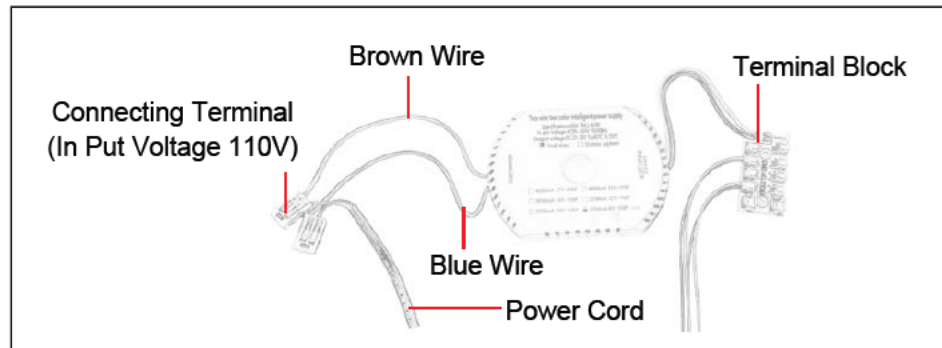

(Figure 4: Plug and Driver)


Installation Steps:

1. Install the “+” metal mount, Please refer to the detailed instructions on page 2.
2. Remove the protective film wrapped on the lamp body, do not use knives or sharp instrument, so as not to scratch the light body or wire insulation layer.
3. Combine the Ring frames in fixed on the top plate according to the shown in figure 3.
4. Test circuit: Connect the power wires with a temporary wire for testing if the light is working properly before install it to the ceiling.
5. Installation: Fix the lamp body to the metal mount, connect the power wires with the connecting terminals.
6. Turn on the power and bouble check again, the installation is complete.

Warning!




- 1) Please install by professional.
- 2) The voltage available for 110-260V only.
- 3) Don't install the lighting fixture under moist condition.
- 4) Please switch off the power when you cleaning the lighting fixture.
- 5) Keep away from acidic &corrosive material.



Pull the orange clip up to 90 degrees, and insert the wire,
then pull the clip down and wire will be clamped tightly

(figure 5)

Details of accessories

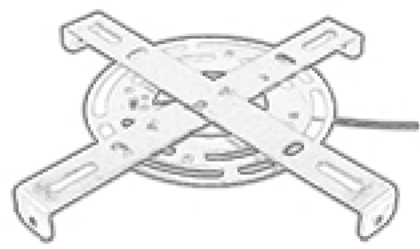

1 Metal Mount *1



2 25mmL tapping screw*4



3 Expansion bolt *4



4 Flat washer *4



5 Screw of Metal Mount *4



6 Φ10mm Hex nut *2
(For spare)



7 Non slip washer*2
(For spare)




8 25mmLScrew *4




9 2cmL Screw rod *2

1pc on the wires
1pc in the accessory bag



10 Remote control*1

Installation instructions for Metal mount

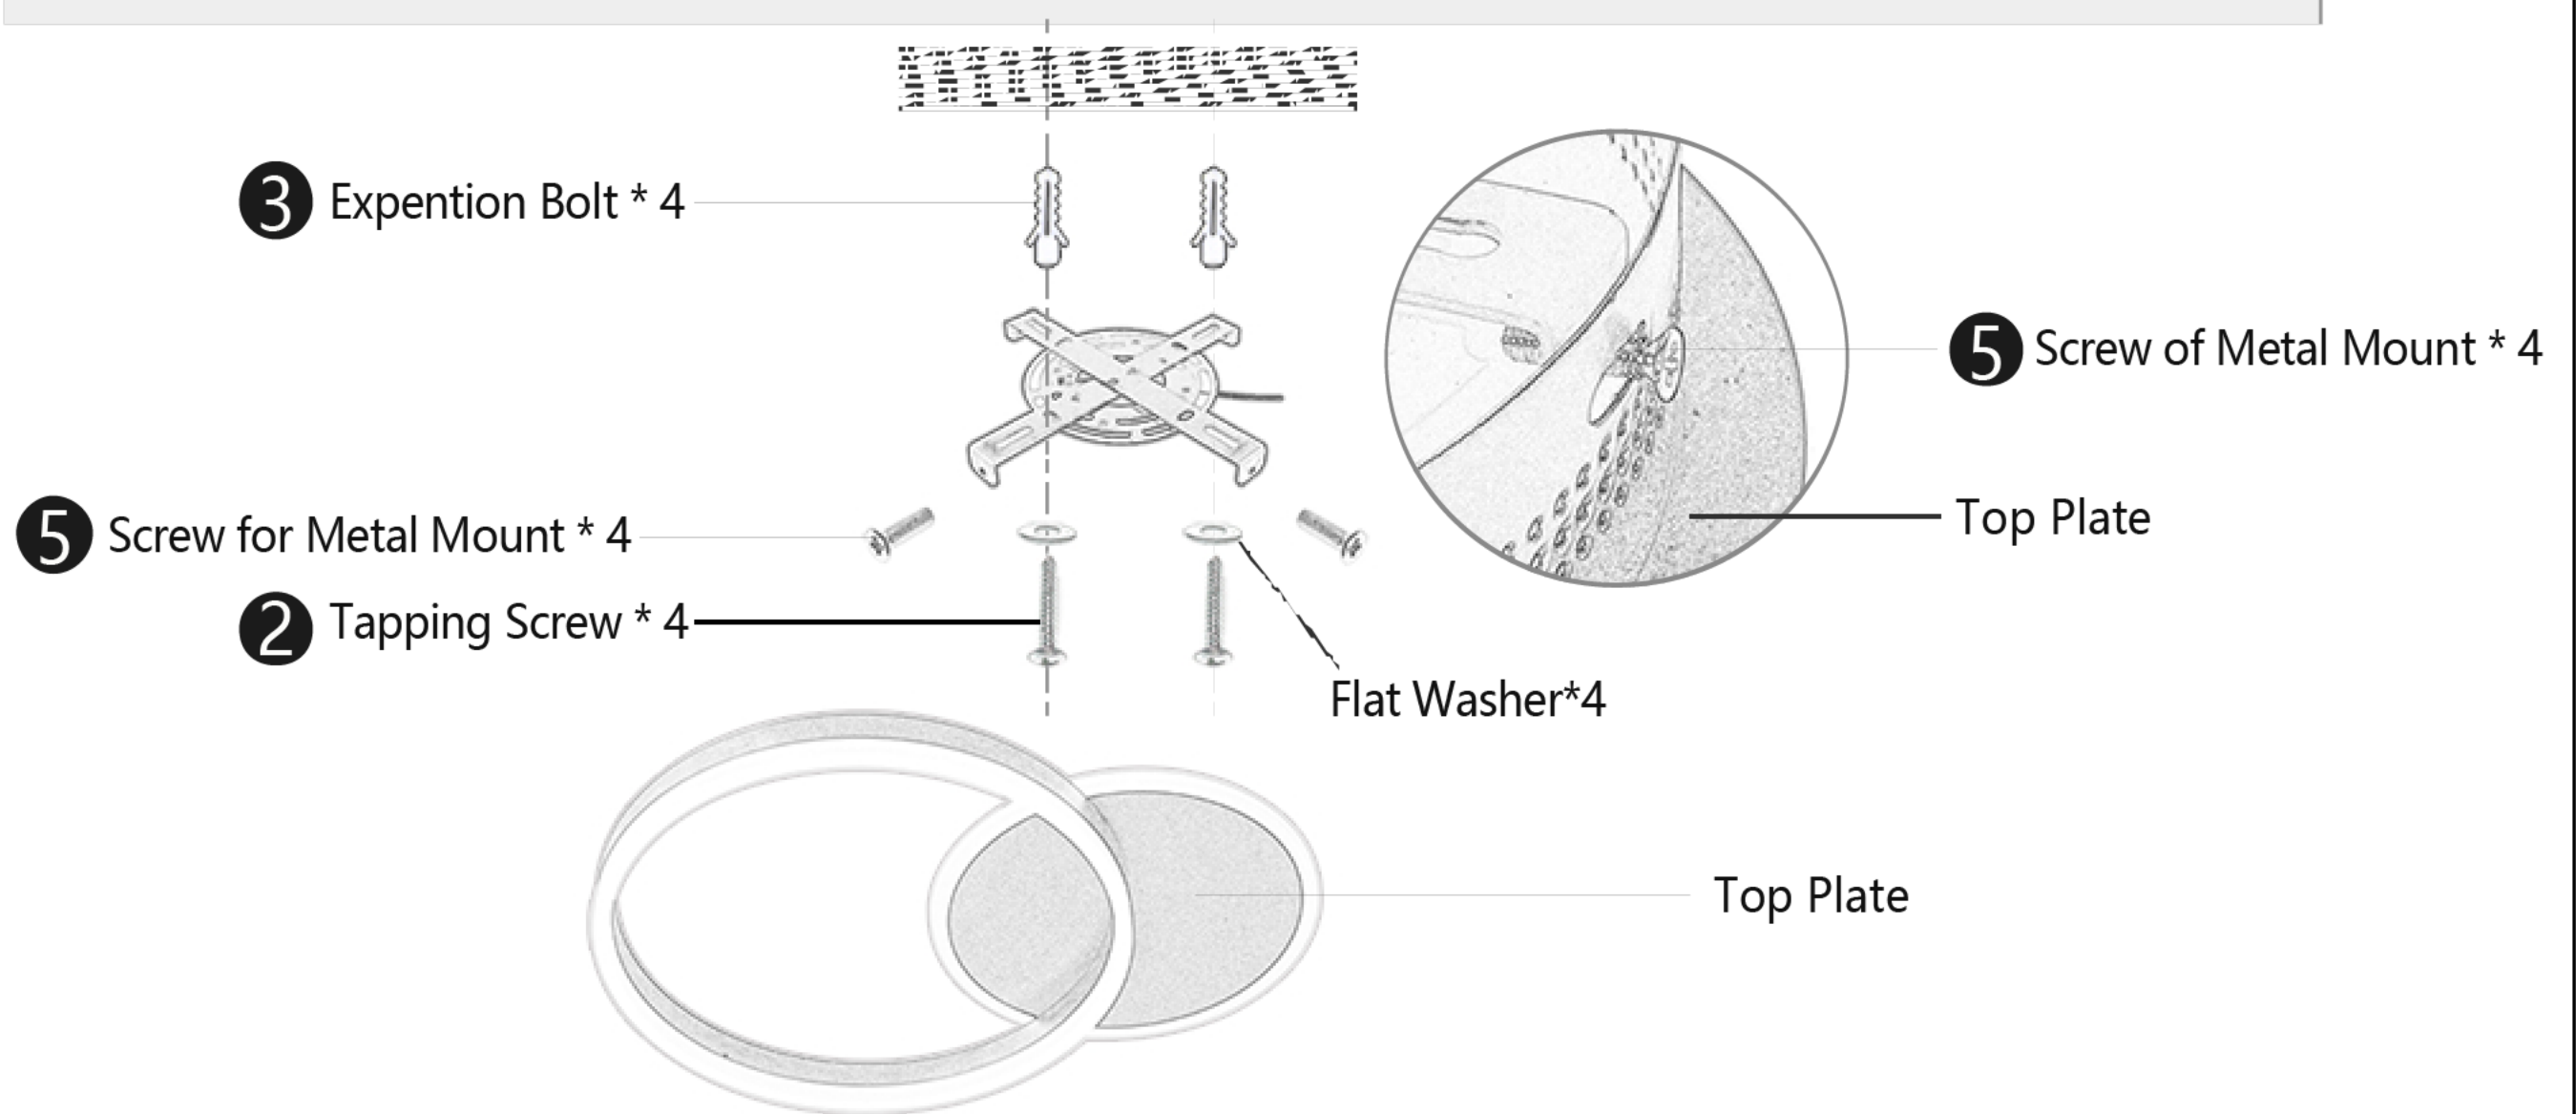

Steps to install the mount:

Step 1: Take the mount to check the lighting location on the ceiling, and mark the screw hole with a marking pen.

Step 2: Drill holes at marked locations with electric drills, and then use a hammer to drive the expansion bolts into the holes.

Step 3: Fix the mount into the expansion bolts with tapping screws 【Each tapping screw should be set with one flat washer】

Step 4: Assemble the lighting frame with screw rods, test the electricity on the ground, make sure the lamp works normally.

Step 5: Connect the driver of the lamp with the power cord of the ceiling, and then fix the lamp to the metal mount with screws.