

# GUMBALL MACHINE

## Operating and Assembly Instructions

### To Fill the Machine

Simply unscrew the screw plug and remove the cap. Pour the gumballs into the glass globe and rescrew the screw plug.

### To Remove Glass

Remove screw plug, cap and Spider Globe and carefully remove Glass Globe. To replace use the reverse procedure.


**Caution:** Finger tighten the Nut and Screw Plug to avoid undue pressure on the Glass Globe

### Coin Free Operation

You can modify your Gumball Machine so that you don't need coins for operation. You will need to carefully remove the Screw Plug, Cap, Nut, Spider Globe, Glass Globe, Gasket, Brush Plate & Adjustable Wheel. When these components are removed firmly grasp the Coin Mechanism and lift outward & upwards.

NOTE: PLEASE EMPTY COINS PERIODICALLY TO AVOID UNIT MALFUNCTION.

Remove this metal piece from the coin mechanism for coin free operation.

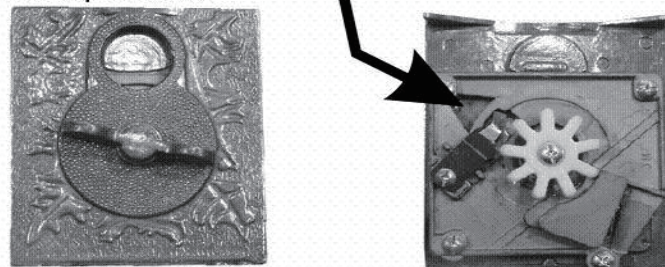

SCREW PLUG

CAP

NUT

SPIDER GLOBE

THREADED ROD

GLASS GLOBE

GASKET

BRUSH PLATE

ADJUSTABLE WHEEL

BODY

BOTTOM PLATE



Tech Support



MADE IN CHINA

### Customer Service

Should you have any inquiries regarding assembly, usage, or potential missing parts, Please feel free to scan the QR and get in touch with us. We're here to assist you and will be glad to help.

## STAND ASSEMBLY INSTRUCTIONS

- Screw narrow end of column 1 into narrow end of column 2.
- Attach individual legs (4) to center leg support - line up screw holes and use the bolts provided to screw leg to support with nut on bottom and screw head on top. Tighten with screwdriver. (But do not overtighten.)
- Screw bottom of column 2 into center leg support.

