















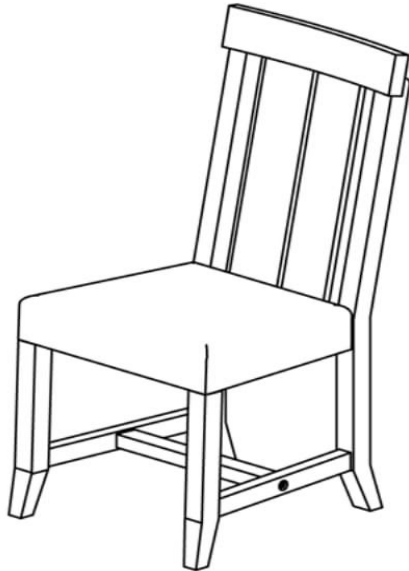


CHAIR WOOD
ASSEMBLY INSTRUCTIONS


A. BACK FRAME 1 PC	F. LEFT STRETCHER 1 PC	G. RIGHT STRETCHER 1 PC
		
B. CHAIR FRAME 1 PC	<u>CHAIR WOOD ASSEMBLED</u> 	
C. MIDDLE STRETCHER 1 PC		
		
D. LEFT LEG 1 PC	E. RIGHT LEG 1 PC	
		

HARDWARE ARE PACKED IN BOX

1	2	3	4	5
6	7	8	9	10
				
				


TOOL REQUIRED

PHILLS HEAD SCREW
DRIVER NOT PROVIDED




STEP 1:

Attach frame (B) to back frame (A) by bolts (2), spring washers (4) and washers (5).

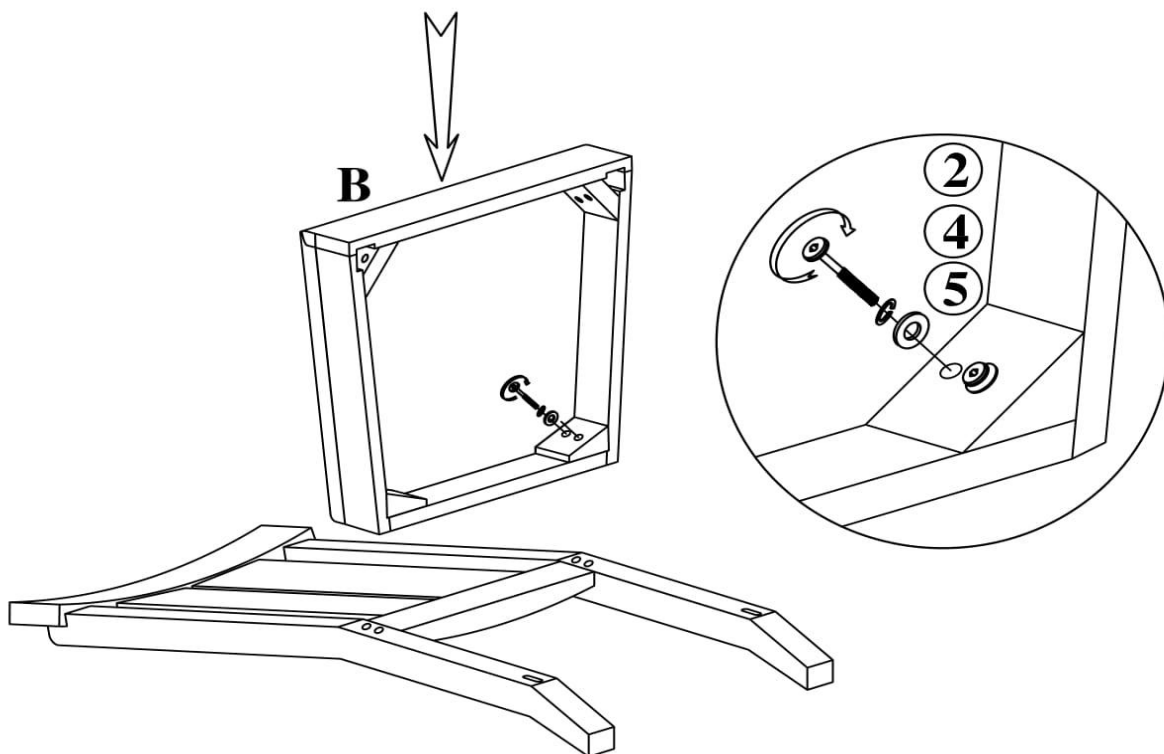
**STEP 2:**

Attach 2 thread bolts (1) to middle stretcher (C).

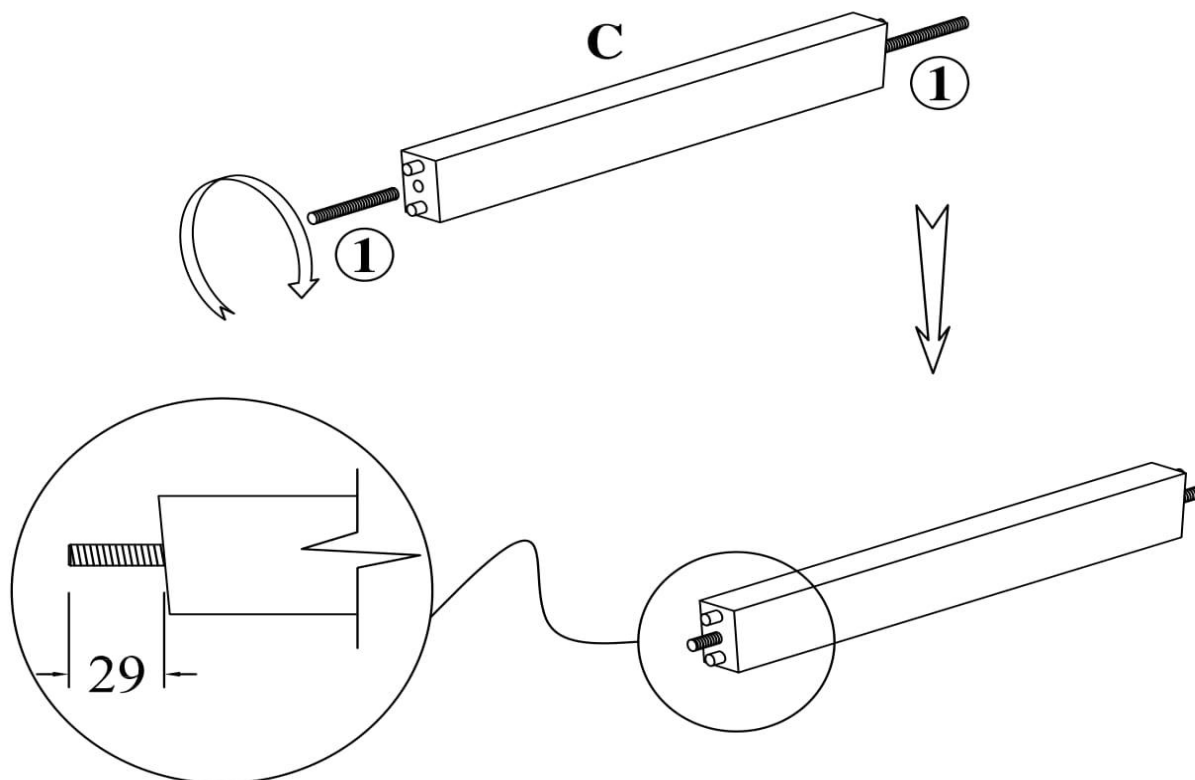


STEP 3:

Fix 2 stretchers (F,G) to middle stretcher (C) by hexagon nuts (8) and washer (9)

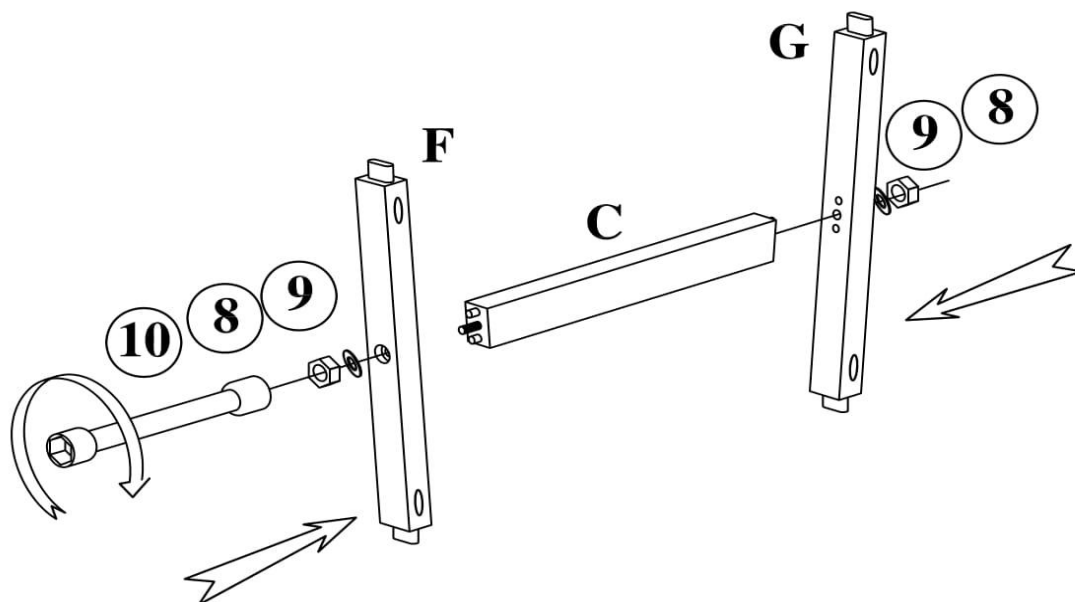
**STEP 4:**

Connect middle stretchers to back frame .

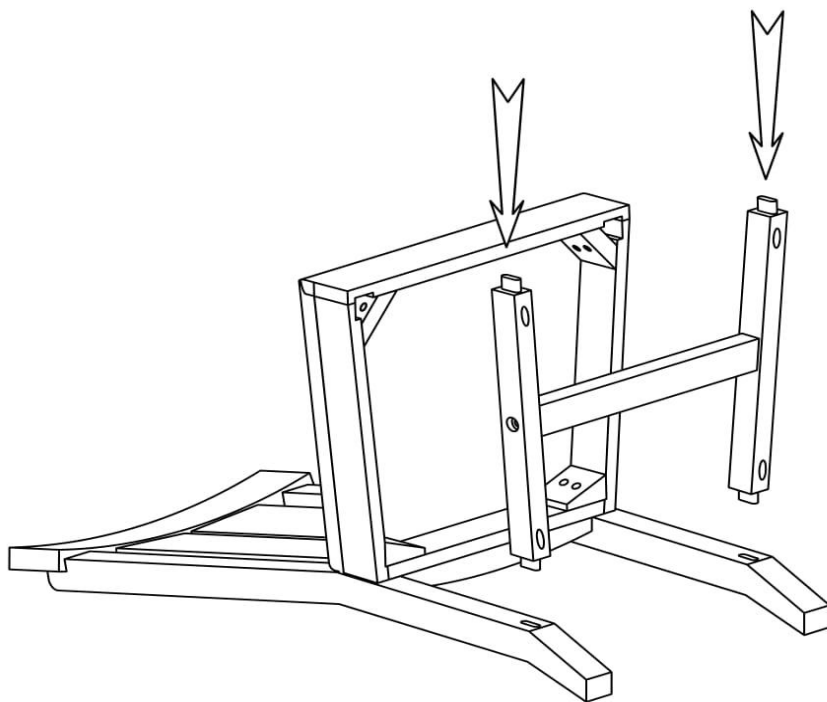

STEP 5:

Insert 2 legs (D,E). They are fixed by bolt (2) washer (4) and spring washer (5)

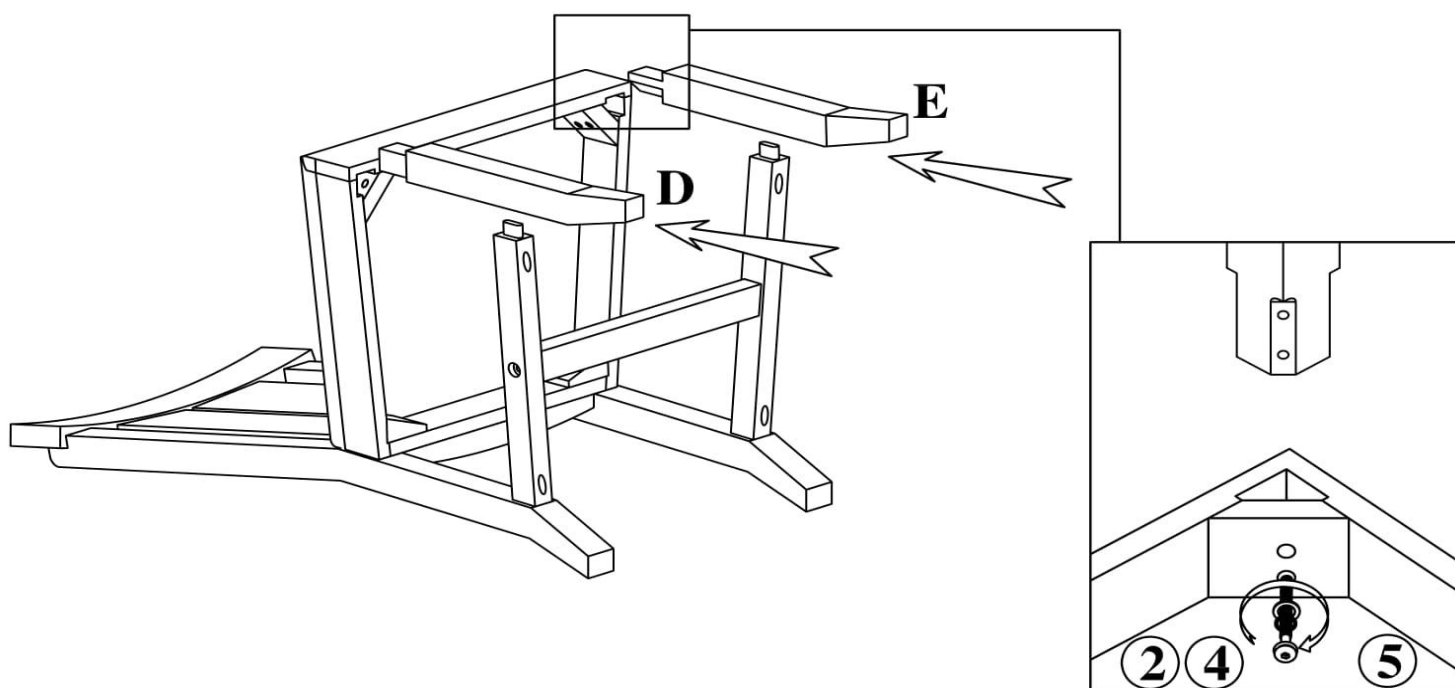**STEP 6:**

Fix middle stretcher again by screw (7).
Assembly complete

