

# WAC LIGHTING

## Viggo

### Mini Pendant 4CCT

Fixture Type: \_\_\_\_\_  
Catalog Number: \_\_\_\_\_  
Project: \_\_\_\_\_  
Location: \_\_\_\_\_

Model & Size	Color Temp	Finish	LED Watts	LED Lumens	Delivered Lumens
<input type="radio"/> PD-69424 24"	<input type="radio"/> 2700K <input type="radio"/> 3000K <input type="radio"/> 3500K <input type="radio"/> 4000K	<input type="radio"/> BK Black	8 W	655	291

Example: **PD-69424-40-BK**

For custom requests please contact [customs@wacighting.com](mailto:customs@wacighting.com)

#### DESCRIPTION

Wisp of light. This sleek and refined pendant is tipped with an acrylic diffuser, casting diffused illumination while emphasizing its minimalistic style.

#### FEATURES

- Low profile, adjustable powered aircraft cables for an ultra-clean look
- May be mounted on a sloped ceiling
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K
- Option to pre-select color temperature or adjust in the field
- Spin-on round canopy with minimal hardware
- Driver installed within the Junction Box, driver dimension: 2.8" x 1.3" x 1.1"

#### SPECIFICATIONS

Color Temp:	2700K,3000K,3500K,4000K
Input:	120-277V,50/60Hz
CRI	90
Dimming:	ELV: 100-10% , 0-10V: 100-5% , TRIAC: 100-5%
Rated Life:	50,000 Hours
Standards:	ETL, cETL, Damp Location Listed
Construction	Aluminum body with etched acrylic diffuser

#### REPLACEMENT PARTS

RPL-GLA-69424 - Acrylic Diffuser




#### FINISHES:



Black

#### LINE DRAWING:

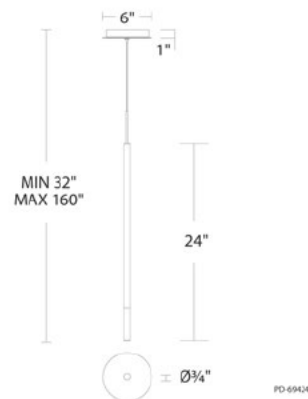

# WAC LIGHTING

## Viggo

### Mini Pendant 4CCT

Fixture Type: \_\_\_\_\_  
Catalog Number: \_\_\_\_\_  
Project: \_\_\_\_\_  
Location: \_\_\_\_\_

Model & Size	Color Temp	Finish	LED Watts	LED Lumens	Delivered Lumens
<input type="radio"/> PD-69432 32"	<input type="radio"/> 2700K <input type="radio"/> 3000K <input type="radio"/> 3500K <input type="radio"/> 4000K	<input type="radio"/> BK Black	8 W	655	291

Example: **PD-69432-40-BK**

For custom requests please contact [customs@wacighting.com](mailto:customs@wacighting.com)

#### DESCRIPTION

Wisp of light. This sleek and refined pendant is tipped with an acrylic diffuser, casting diffused illumination while emphasizing its minimalistic style.

#### FEATURES

- Low profile, adjustable powered aircraft cables for an ultra-clean look
- May be mounted on a sloped ceiling
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K
- Option to pre-select color temperature or adjust in the field
- Spin-on round canopy with minimal hardware
- Driver installed within the Junction Box, driver dimension: 2.8" x 1.3" x 1.1"

#### SPECIFICATIONS

<b>Color Temp:</b>	2700K,3000K,3500K,4000K
<b>Input:</b>	120-277V,50/60Hz
<b>CRI</b>	90
<b>Dimming:</b>	ELV: 100-10% , 0-10V: 100-5% , TRIAC: 100-5%
<b>Rated Life:</b>	50,000 Hours
<b>Standards:</b>	ETL, cETL, Damp Location Listed
<b>Construction</b>	Aluminum body with etched acrylic diffuser

#### REPLACEMENT PARTS

RPL-GLA-69424 - Acrylic Diffuser



#### FINISHES:



Black

#### LINE DRAWING:

