


LIFT MASTER BOOM, ORBIT TELESCOPING BOOM-LM-OBT-3-24

APPROX WEIGHT: 444.49 lbs.
DOES NOT INCLUDE WEIGHT OF POWER OR PACKAGING!!!

*** ANY ADDITIONS, DELETIONS, OR OMISSIONS MUST BE CORRECTED ON THIS DRAWING AS THIS DRAWING WILL BE CONSIDERED ALL INCLUSIVE ***

ALL GRAPHICS PROVIDED ARE FOR REFERENCE ONLY. IF CERTAIN DIMENSIONS ARE CRITICAL PLEASE VERIFY THOSE DIMENSIONS WITH YOUR SALESPERSON

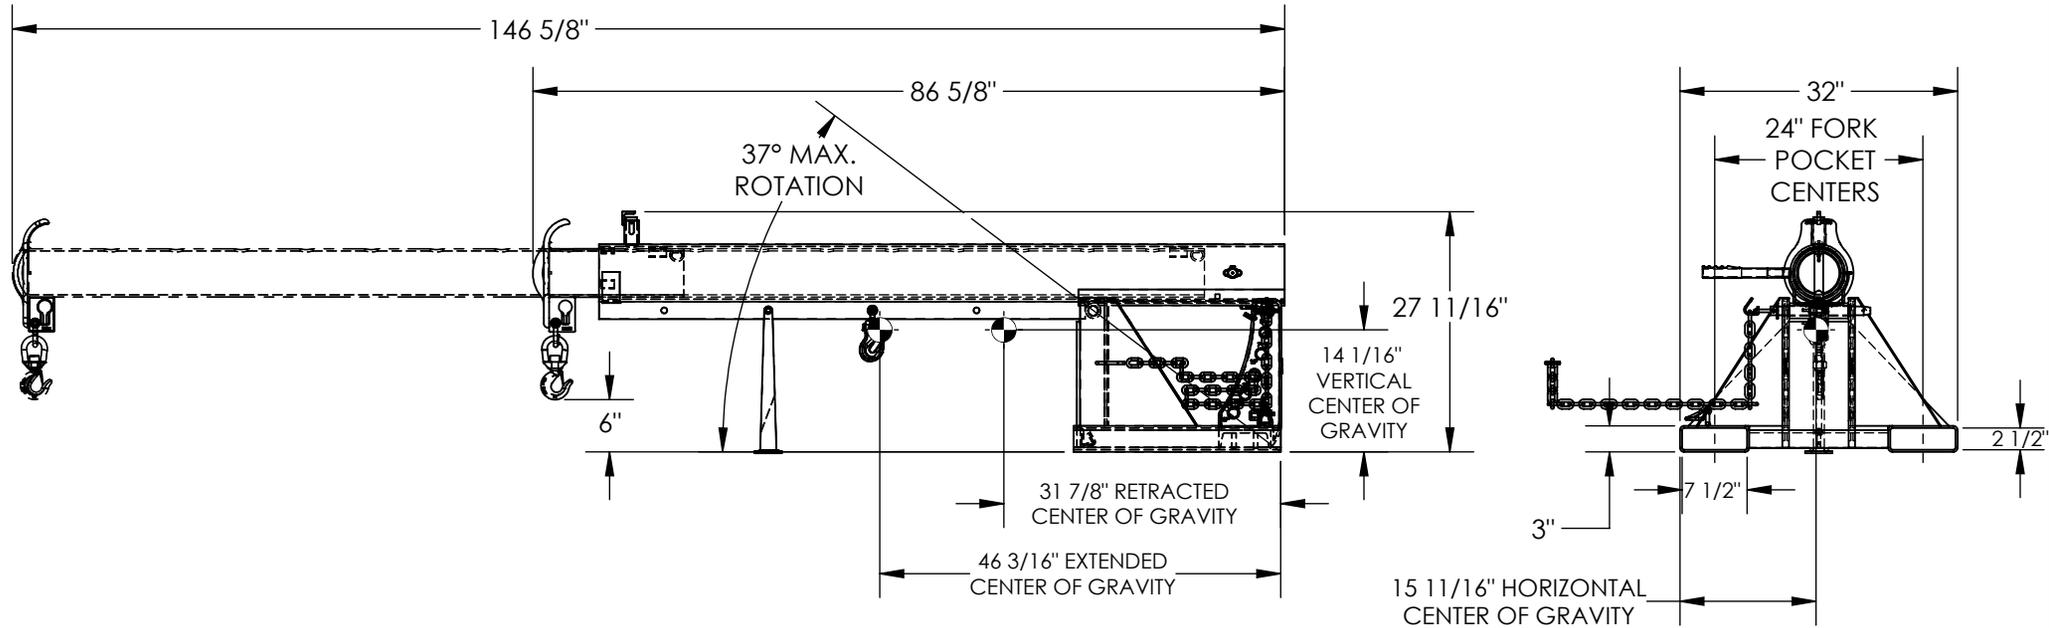

*--MAXIMUM SINGLE HOOK CAPACITIES

DISTANCE	36"	48"	60"	72"	84"	96"	108"	120"	132"	144"
CAPACITY	3000	2750	2500	2250	2000	1750	1500	1250	1000	750

STANDARD FEATURES

MODEL NUMBER IS LM-OBT-3-24
CAPACITY IS 3,000 LBS
MAXIMUM TILT ANGLE IS 37°
OVERALL HEIGHT - 27 11/16"
HEIGHT (MAX TILTED) - 99 1/2"
LENGTH RETRACTED - 86 5/8"
LENGTH EXTENDED - 146 5/8"
OVERALL WIDTH IS 32"
36" MINIMUM HOOK POINT
144" MAXIMUM HOOK POINT
HOOK HEIGHT - 6"
HOOK HEIGHT (MAX TILTED) - 78 5/16"
USABLE FORK POCKET - 2 1/2"x7 1/2"
24" FORK POCKET CENTERS
TOUGH BAKED IN POWDER COATED
BLUE BASE FRAME W/ YELLOW EXTENSION

APPROX. WEIGHT / LOST LOAD = 444.49
MINIMUM EFFECTIVE THICKNESS = LESS THAN 1"
NEVER EXCEED LOAD CENTER
RATING PER FORKTRUCK
MANUFACTURERS GUIDELINES.
DO NOT USE THIS FORK TRUCK
ATTACHMENT IF LOAD WILL
EXCEED FORK TRUCK MANUFACTURER'S
LOAD CENTER RATING

DIMENSION TOLERANCE ± 1/4"

APPROVAL

I, THE UNDERSIGNED, AGREE THAT THE PRODUCT AS REPRESENTED SATISFIES DESIGN AND DIMENSION REQUIREMENTS. I ALSO ACKNOWLEDGE MY DUTY TO CONFIRM PRODUCT AND INSTALLATION COMPLIANCE WITH ALL APPLICABLE FEDERAL, STATE AND LOCAL REGULATIONS AND STANDARDS.

ANY MODIFIED UNITS ARE NON-RETURNABLE

[] As drawn [] As marked

Signed: _____ Date: _____

Printed Name: _____

LEAD TIME WILL START UPON RECEIPT OF SIGNED APPROVAL DRAWING

SPECIAL FEATURES

NONE

FOR INTERNAL USE ONLY PROJECT SIGN OFF	
SALES	
ENG.	
FAB.	
POWER	

DISTRIBUTOR'S NAME:		P.O.#
VESTIL MANUFACTURING		X
DRAWN BY: B.NOTHNAGEL		DATE: 7/1/2015
REFERENCE: X		SCALE: 1:22
QUOTED LEAD TIME: X		QUOTE #
		X
		FILE NAME:
		08-007-140-001