

### Description

- Pressure balance with diverter rough in valve
- Flow rate shower 4.9 gpm@45psi and flow rate bath 5.2 gpm@45psi
- Passed the certificate of anti-scald standard asse 1016-2011/asme a112.1016-2011 / csa b125.16-11

### Finish




100160440

### Certifications and quality characteristics



### Flow rate diagramme

Pressure (psi)	0	7.25	14.5	29.01	43.51	58.02	72.52
Flow - Shower (gpm) (±15%)	0	2.03	2.96	4.44	5.18	6.1	6.58
Flow - Bath (gpm) (±15%)	0	1.77	2.67	3.78	4.65	4.81	6.02

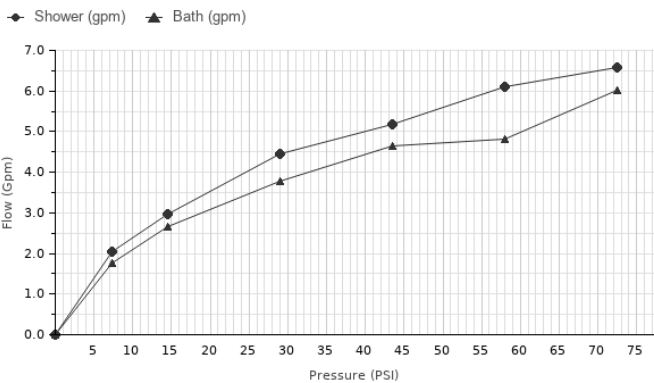

### Technical drawing

Dimensions in inches

