


Dimensions

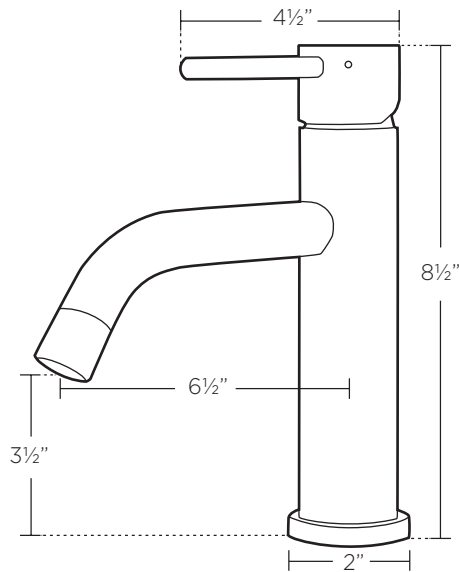

Troubleshooting

Problem	Cause	Action
Leaks underneath handle.	Worn cartridge.	Replace cartridge.
Aerator leaks or has an inconsistent water flow pattern.	Aerator is dirty, worn or misfitted.	Unscrew the aerator to clean or replace washer or aerator.
Water will not shut off completely.	Dirty or worn out washer in cartridge.	Remove handle and cartridge to inspect washer, then reinstall.

Maintenance

Clean faucet with mild soap and water. Wipe the entire surface dry with a dry, clean, soft cloth after each use.


Do not use cleaners which contain acids, harsh chemicals or abrasives.



Neutral Detergent



Acidic Chemicals



Abrasives

W
WHITEHAUS
COLLECTION

If you have any questions, please call us at:

Phone: 800-527-6690

Fax: 800-694-4837

General inquiries:

info@whitehauscollection.com

For purchase orders, email us at:


orders@whitehauscollection.com

W | **WHITEHAUS**

**Solid Stainless Steel
Elevated Lavatory Faucet**

WHS8601-SB

Lever Handle

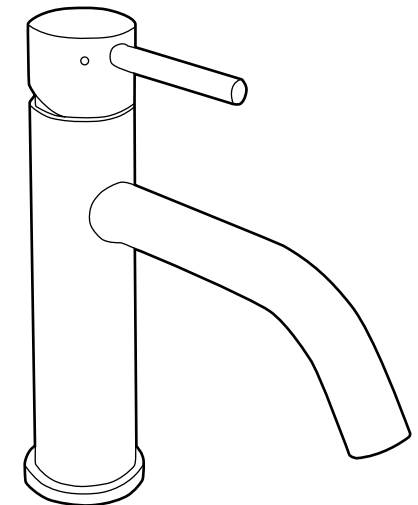

Includes:

Faucet Installation

Parts list

Dimensions


Troubleshooting

Maintenance

ASME A112.18.1/CSA B125.1
NSF/ANSI/CAN 372
NSF/ANSI/CAN 61: Q ≤ 1
≤ 1.2GPM (4.5L/min) at 60 psi




Required Tools

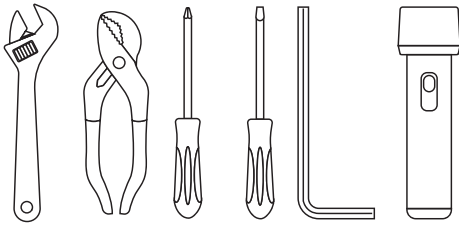


Faucet Installation Part 1

Before installing a new faucet, properly flush out the pipework to remove any debris.

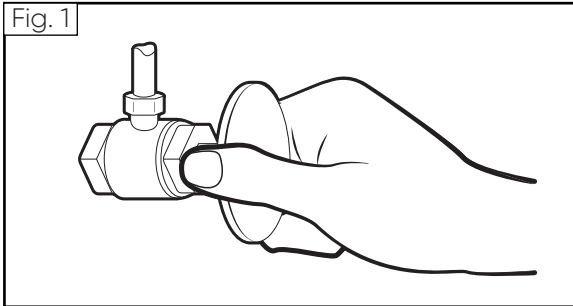


1. Turn off the supply valve and clean out any dirt or debris. If replacing an old faucet, remove it and thoroughly clean the surface.

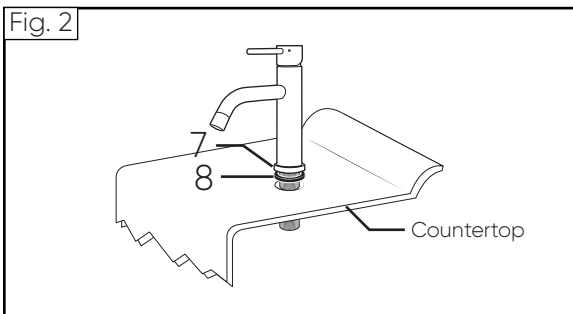


2. Drill a $\varnothing 1\text{--}3/8"$ to $\varnothing 1\text{--}1/2"$ hole in the countertop. Place the O-ring (8) in the base plate (7), then insert the faucet assembly through the hole.


Faucet Installation Part 2

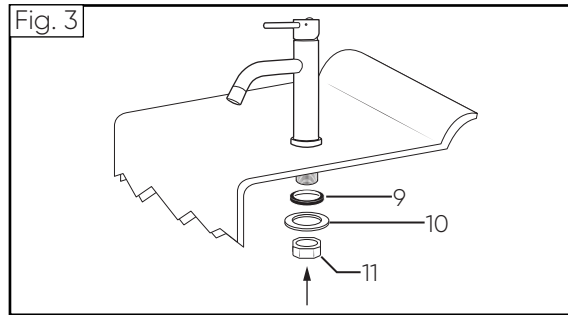

3. Adjust the faucet to the right position and put on the rubber gasket (9), the metal washer (10) and lock nut (11), tighten using a wrench.

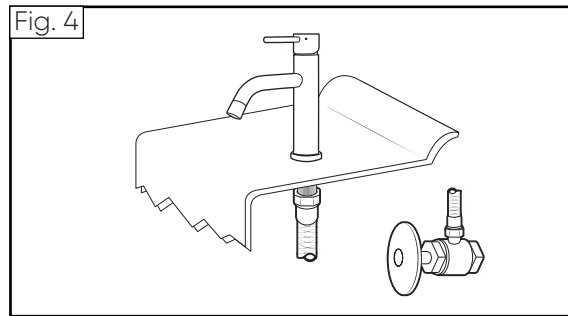


4. Connect the flexible hoses (15 & 16) to the water supply valve (hot and cold). Make sure the hoses are securely fastened before turning on the valve.

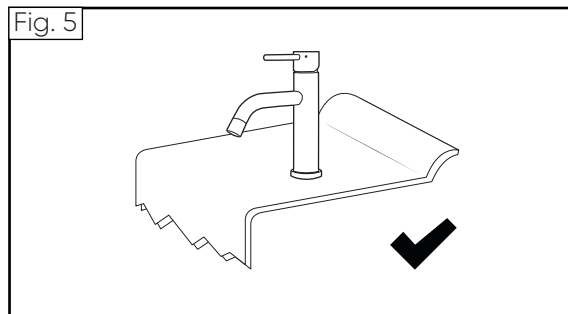

5. Check all joints to ensure they are properly connected. Then, turn on the water and inspect the faucet for any leaks.

Parts List

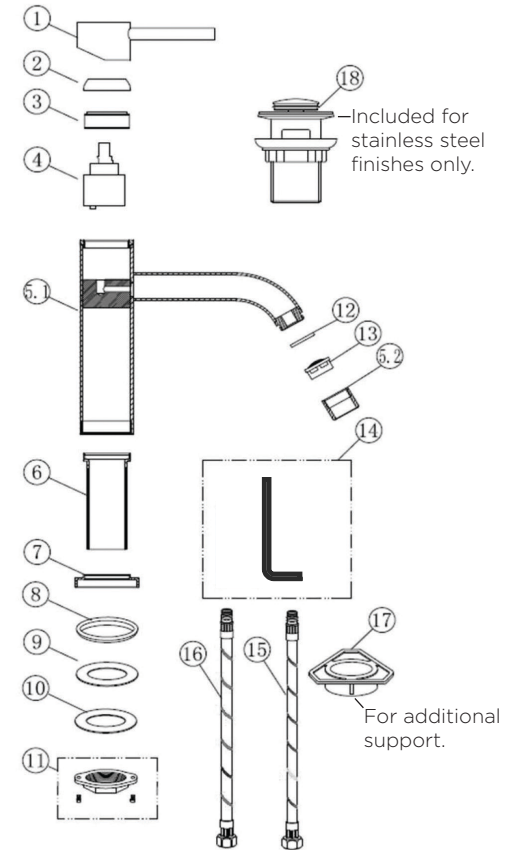

1. Handle Assembly	9. Rubber Gasket
2. Cover	10. Metal Washer
3. Press Cover	11. Lock Nut
4. Cartridge	12. Rubber Ring
5. Assembly	13. Aerator
5.1 Body & Spout	14. Allen Wrench
5.2 Water Nozzle	15. 9/16" Red Hose
6. Shank	16. 9/16" Blue Hose
7. Base plate	17. Extra Mounting Plate
8. O-ring	18. Drainer