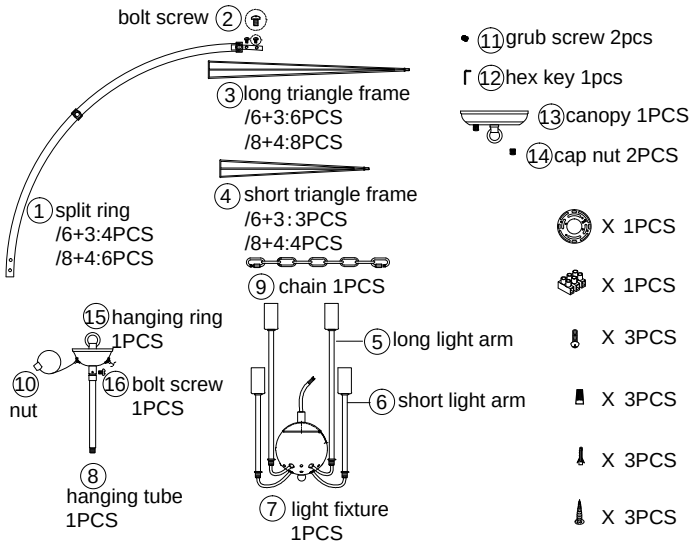

Note: male A should connect with female A, male B should connect with female B (C with C, D with D).

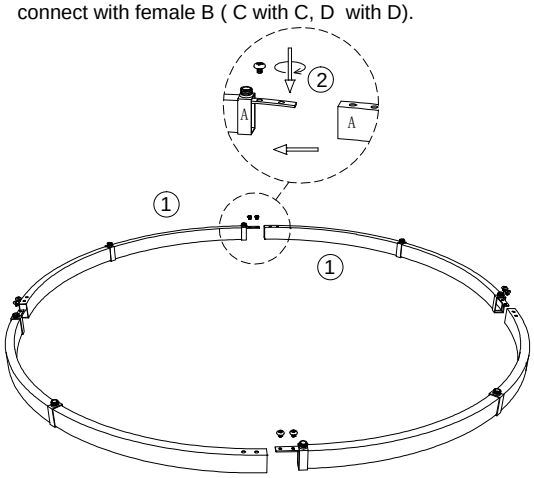

1.Assemble the ring ①,put the male and female connector together, lock it with screw ②.

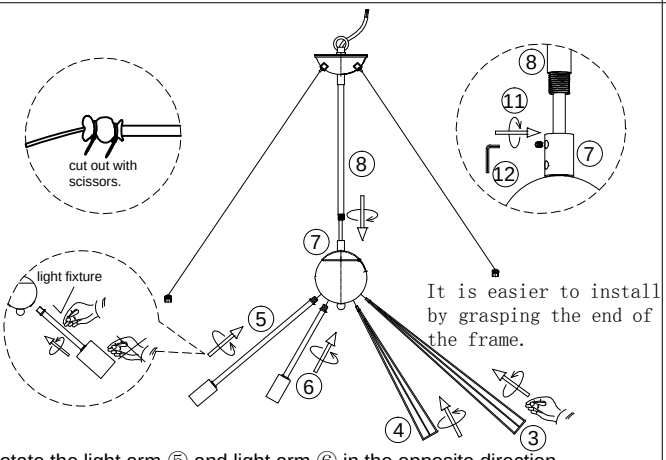

2.Rotate the light arm ⑤ and light arm ⑥ in the opposite direction for ⑩ circles, and then install it to the ball ⑦.
(note:please grasping the tube not the light cup when install the light arms!!!)
3.Rotate to install the frame ③ and frame ④ to the ball ⑦.
4.Let the wire go through the hanging tube ⑧ , rotate to install to the ball ⑦, fix it with grub screw ⑪ by rotate hex key ⑫.

Press up the head of gripper to adjust the height of the steel string.

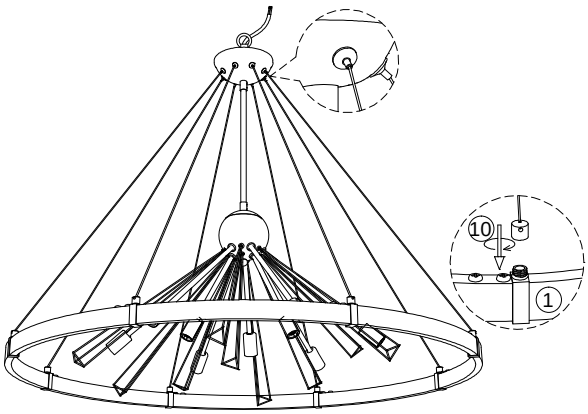

5.Rotate the nuts ⑩ to the threadeds of ring ①, press the head of gripper to adjust the length of the steel wire to balance the fixture.

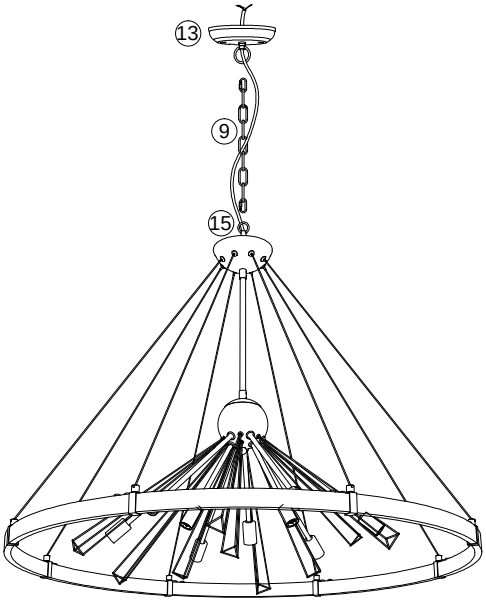

6.Hang the fixture to the canopy ⑬ with chain ⑨, let the wire go through the chain ⑨ and canopy ⑬.

Loosen the mini screw to adjust the light fixture to a vertical state, after that rotate the mini screw to fasten the tube again.

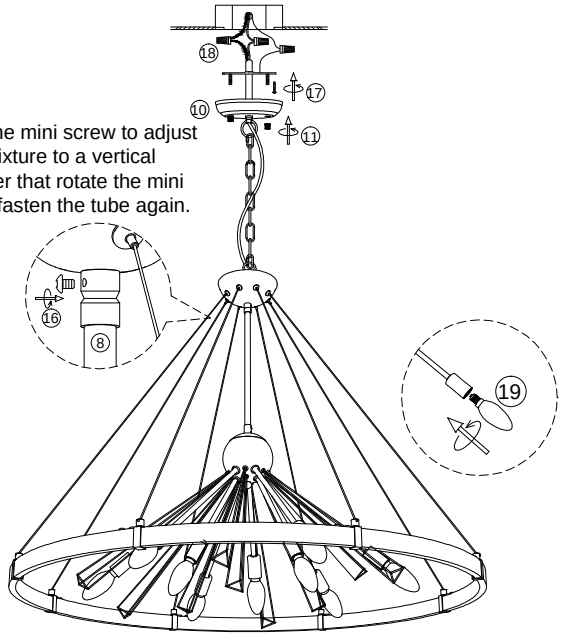

7.Install the bracket to the ceiling junction box with screw ⑰.
8.Connect the wire to your home line with cap connector ⑱.
9.Install the fixture to the bracket with cap nut ⑪.
10.Install the bulb ⑲.

Please read carefully before installation!!!
Note : Please make sure that the electricity is powered off during installation !
Only a professional electrician should install this kind of product !