

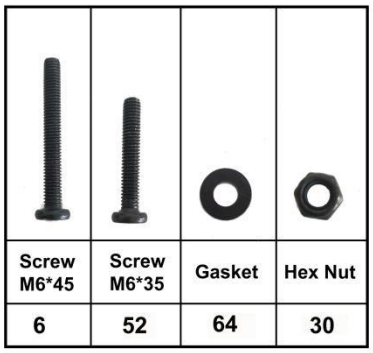
We'd love to hear from you!

Thank you for your recent purchase of our product. We hope you will be pleased with both the product and service you received.

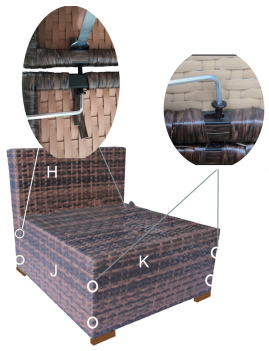
Assembly Tips

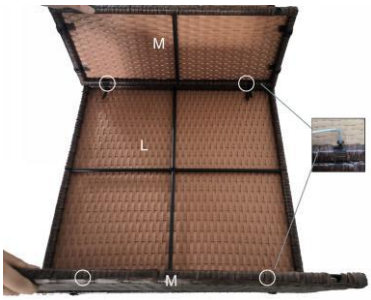
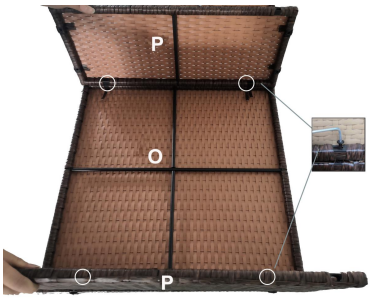
◎ **Before installation, please confirm that the parts are complete and the parts number are correct**

		
H.Seat Back	**I.Left Sideboard**	**J.Right Sideboard**
		
K.Seat Base	**L.Top Side**	**M.Side Panel**

		
N.Side Panel	PART 1 * 3	Screw 6
		
O.Top Side	P.Side Panel	Q.Side Panel

◎ Hand tighten all the bolts to line up all the pieces. Then tighten all the bolts down.

		
Step 1：Attach the Seat back (H) to the Seat base(K) with screw(M6*45) and gasket .Do this in 2 places.Do not tighten all the bolts in this step.	**Step 2：Attach Left Sideboard (I) and Right Sideboard (J) to the Seat back (H) and Seat base(K) with screw (M6*45 And M6*35) and gasket. Do this in 4 places. Hand tighten all the bolts to line up all the pieces. Then tighten all the bolts down.**	**Step 3 : Install the foot screws(M6*35) and tighten them all.** **The another seat is the same!**

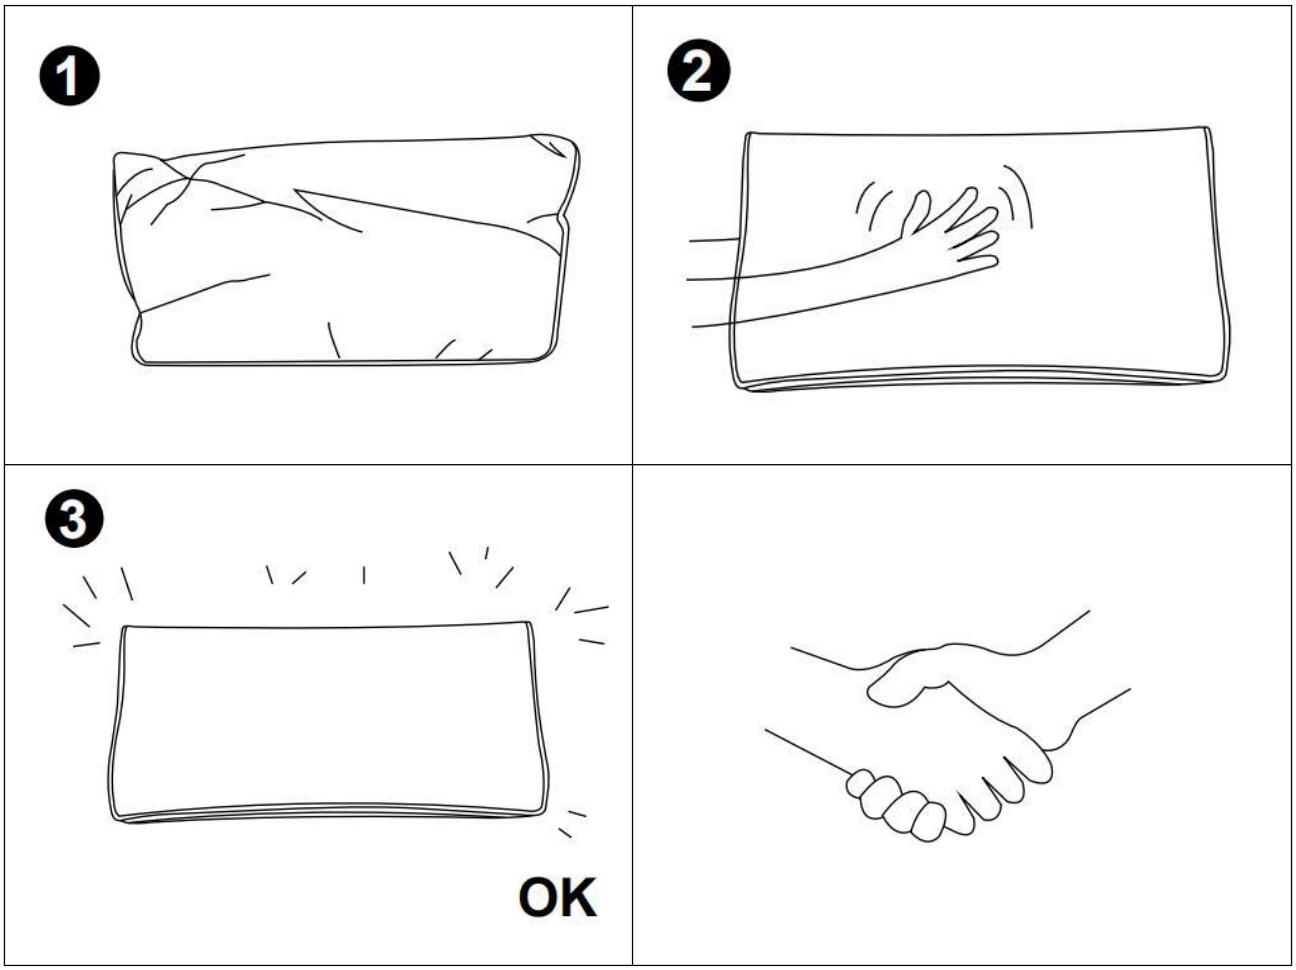
		
Step 1：Attach the two Side Panel (M) to the Top Side(L) with screw(M6*35) and gasket .Do this in 4 places.Do not tighten all the bolts in this step.	**Step 2： Attach the two side panel (N) to the another side panel (M) and top side (L) with screw (M6*35) and gasket. Do this in 8 places. Hand tighten all the bolts to line up all the pieces. Then tighten all the bolts down.**	**Step 3 : Install the foot screws(M6*35) and tighten them all. After the coffee table is placed flat, make sure there are suction cups on the top of the table, and then place the glass on the suction cup**
		
Step 1：Attach the two Side Panel (P) to the Top Side(O) with screw(M6*35) and gasket .Do this in 4 places.Do not tighten all the bolts in this step.	**Step 2： Attach the two side panel (Q) to the another side panel (P) and top side (O) with screw (M6*35) and gasket. Do this in 8 places. Hand tighten all the bolts to line up all the pieces. Then tighten all the bolts down.**	**Step 3 : Install the foot screws(M6*35) and tighten them all.**

BOLT ASSEMBLY STEPS		
		
Match the two different holes	insert bolts	Tighten the bolt with the tool until the end

◎ Don’t tighten all the bolts before the product is fully assembled.

◎ If the screws are not tight or twisted, do not use gravity, first loosen the adjacent holes, align each hole, and then tighten

◎ **Before using the cushion, please pat with both hands and it will get back into cushion's original shape soon.**



A CONNECTOR MANUSECTIONAL SOFA CONNECTOR MANUAL



Tips for Protection

◎ Seat capacity: 250 LBS

◎ Do not stand on the seat

◎ Do not sit on the armrest

◎ To protect your fabric (upholstery or cushions), first give it a good wash with mild dish soap and warm water. Once the fabric is completely dry, spray it with fabric protector. Tip: Spray a small piece of fabric first to make sure the protector won't discolor the furniture

◎ Even if your furniture is covered, it's still going to accrue dirt and rot if you don't clean it every once in a while. Pick a sunny day, and take the time to clean your furniture with mild dish soap and warm water. Use a sponge to break up grime and a hose to rinse away any soap residue

◎ To prevent the cushion from being blown away by strong wind, you can use a rope to tie the cushion to the back of the chair