

# INSTALLATION INSTRUCTION FOR FIXTURE

**WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.**  
**AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.**

Page:1/2

## ASSEMBLY THE FIXTURE (FIG. 1&FIG.3)

1. Shut off power at the fuse box or circuit breaker box and remove the old fixture including the mounting hardware.
2. Carefully unpack your new fixture and lay out all the parts in a clean area. Take care not to misplace any small parts necessary for installation.
3. Attach crystal ball (T) onto tube (S).
4. Install fabric shade (M) on arms (R) using metal nuts (N) and place decorative ring (L) on fabric shade (M).
5. Determine the desired height and thread rods (G1 and G2) together. Screw loop (I1) to the rod (G1). Pass the wires carefully through each rod as you assemble. Attach the bottom end of rod into the coupling (J).
6. Attach quick link (H) to loop (I2) on canopy (D). Carefully feed the wire through loop (I1), quick link (H), and loop (I2).
7. Attach circular strap (B) to the junction box using the junction box screws (C). The side of the circular strap (B) marked "GND" must face out. Mounting screw can be adjustable if necessary.
8. The support cable is provided to support the weight of the fixture while wiring. Align the fixture to circular strap (B) and attach hook on the end of support cable (E) into a slot located on circular strap (B). Carefully allow the support cable (E) to support the weight of the fixture while wiring.

## CONNECTING THE WIRES (FIG. 2)

10. Connect the electrical wires as shown in figure 2, making sure that all wire connectors are secured. If your junction box has a ground wire (green or bare copper), connect the fixture's ground wire to it. Otherwise, connect the fixture's ground wire directly to the circular strap (B) using the green screw provided.
11. Tuck the wire connectors neatly into the junction box.



## COMPLETING THE INSTALLATION (Fig. 1)

12. Raise the fixture over the mounting screws (A) and secure with decorative nuts (F).
13. Place candle covers (Q) over sockets (V), then place tube covers (K) over candle covers (Q). Install (6) six candelabra base bulbs (X) up to 60 watts each or CFL or LED equivalent (not included) in accordance with the fixture specification—**DO NOT EXCEED THE MAXIMUM WATTAGE RATING! (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!)**
14. Attached leaf finial (O) with coupling (P).

The leaves on the lamp body can be manually adjusted to change their shape.

Your installation is now complete. Turn on the power supply of the junction box to test the fixture.


Fig.1

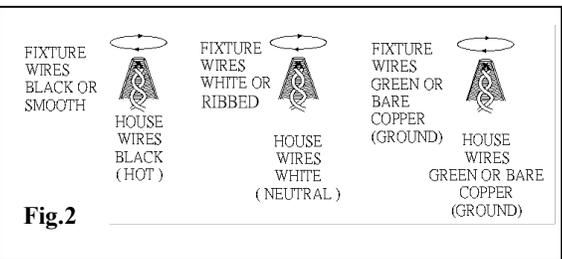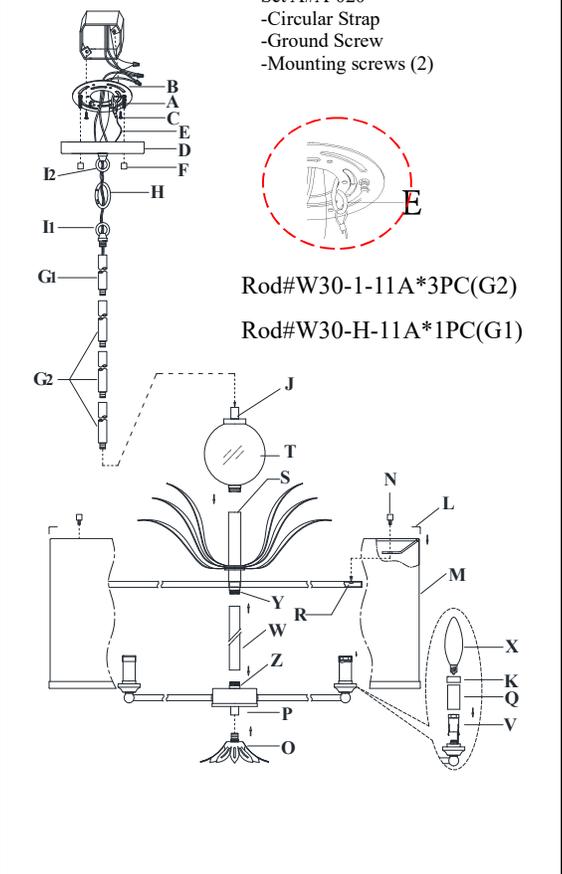

**Note: Illustration (Fig. 1) on this manual is for installation purposes only. It may or may not be identical to the fixture purchased.**




Fig.3

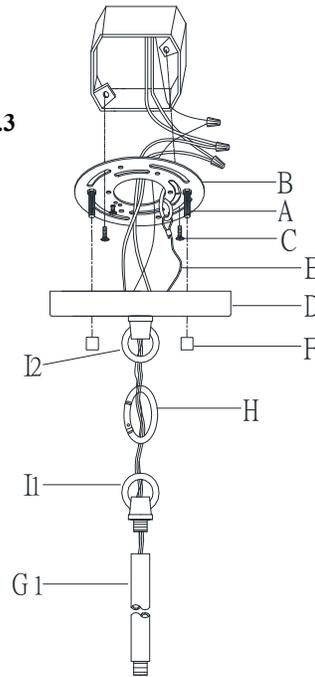

a. Hardware Bag:

- A. Mounting Screw\*2
- B. Circular Strap\*1
- C. Screw\*2
- D. Canopy\*1
- F. Decorative Nuts\*2
- H. Quick Link\*1
- I. Loop\*2
- AA. Hex Nuts\*2

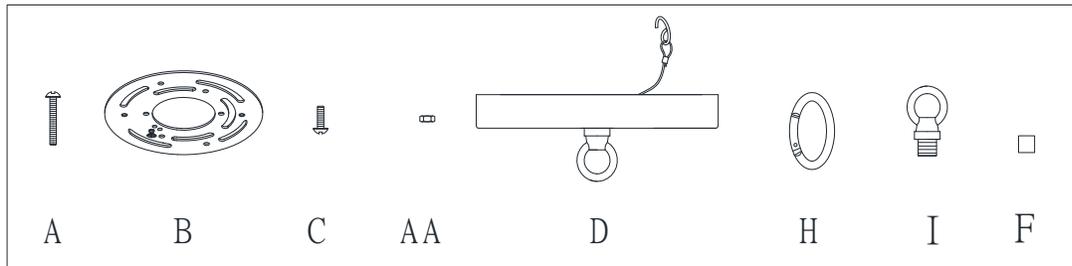

b. Hardware Bag:

- G1. ROD 6"\*1
- G2. ROD 12"\*3

