



ASSEMBLY INSTRUCTIONS

FOOT ADJUST™ BASKETBALL SYSTEM

MODEL 90593

BEFORE ASSEMBLY:

- Assemble on a level surface
- At least 2 adults required for assembly

WATCH THE HOW-TO VIDEO ON YOUTUBE®



Scan the code, or visit go.lifetime.com/90593-fullav

YouTube® and the YouTube logo are trademarks of Google, LLC.



TOOLS REQUIRED

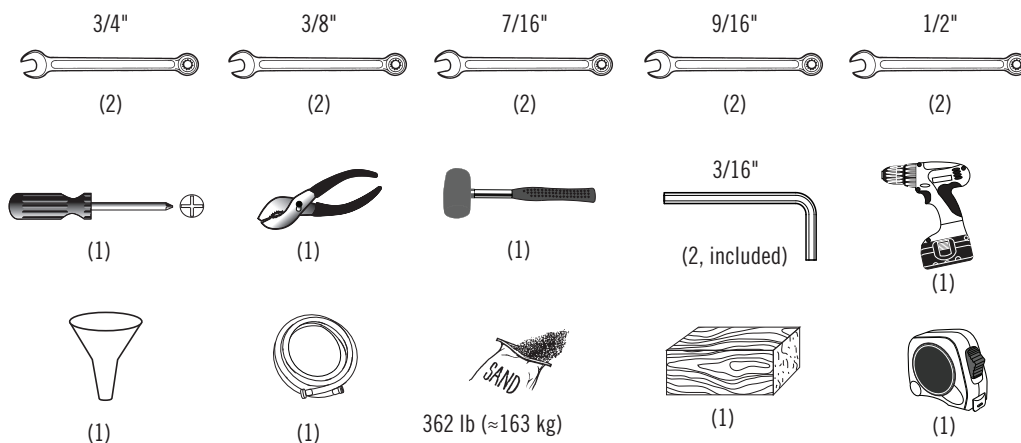


TABLE OF CONTENTS

Icon Legend.....	2
Warnings & Notices.....	3
Pole Assembly.....	4
Pole-to-Base Assembly.....	8
Backboard-to-Rim Assembly.....	11
Backboard-to-Pole Assembly.....	17
Handle Assembly.....	20
Parts Identifier.....	i-iv
Final Assembly.....	29
Maintenance Instructions.....	34
Registration.....	34
Warning Sticker.....	35
Warranty.....	39

QUESTIONS?

Dial 1-800-225-3865

CONTACT LIFETIME® CUSTOMER SERVICE:

Live Chat:
www.lifetime.com/customerservice/home
(Click on the "LIVE CHAT" tab)

MODEL# AND PRODUCT ID (both are needed when contacting us)

Model Number:

Product ID:


90593




ICON LEGEND



- Indicates special heed should be taken when reading.




- Indicates the parts to be used for a section or that no parts will be required for a specific section.



- Indicates the hardware to be used for a section or that no hardware is required for a specific section or page.



- Indicates the tools to be used for a section or that no tools are required for a specific page.



- Indicates to use an electric drill or to not use an electric drill for a specific step.




- These nuts are centerlock nuts. The rectangular indent prevents the nut from loosening on its own. They are designed to be tight; therefore, they will be harder to tighten. Tighten only until flush with the metal or plastic.




- Indicates the number of adults required for a specific step, i.e., 2, 3, 4, etc.



- Indicates to repeat a step or an action.



- Indicates the use of a centerlock nut. A nut with this marking will require some effort to tighten. This hardware was designed with this feature in order to prevent loosening later.



- Indicates a specific step is harder to perform.



- Indicates to tighten the hardware only by hand until instructed otherwise.



WARNINGS & NOTICES



SAFETY INSTRUCTIONS



FAILURE TO FOLLOW THESE WARNINGS MAY RESULT IN SERIOUS INJURY OR PROPERTY DAMAGE AND WILL VOID WARRANTY.

Owner must ensure that all players know and follow these rules for safe operation of the system.

To ensure safety, do not attempt to assemble this product without following the instructions carefully. Check entire box and inside all packing material for parts and/or additional instruction material. Before beginning assembly, read the instructions and identify parts using the hardware identifier and parts list in this document. Proper and complete assembly, use and supervision are essential for proper operation and to reduce the risk of accident or injury. A high probability of serious injury exists if this product is not installed, maintained, and operated properly.

- If using a ladder during assembly, use extreme caution.
- Two capable adults are recommended for this operation.
- Check base daily for leakage. Leaks will cause system to fall.
- Assemble the pole sections properly. Failure to do so could cause the pole sections to separate during play or transport.
- Minimum operational height is 6 ft 6 in (1.98m) to the bottom of the backboard.


Most injuries are caused by misuse and/or not following instructions. Use caution when using this product.

1

POLE ASSEMBLY



HARDWARE REQUIRED



ABH (x2)
3/8" x 3 1/2"






ABB (x2)
3/8"




ADS (x2)
1/4" x 3/4"



ADA (x2)
1/2" x 2.91



AAF (x2)
3/8"



CIH (x2)




PARTS REQUIRED

Metal Parts



ALH (x1)



ALL (x1)




ALF (x1)



ALE (x1)



TOOLS REQUIRED



(2)



(1)




(1)




(1)

► SECTION 1 (CONTINUED)

TOOLS AND HARDWARE REQUIRED




ADS (x1)



CIH (x1)




- If you have trouble with this section, scan the code below to view a video on how to assemble the pole.



- <http://go.lifetime.com/90593-section1>


1.1

- Align the hole in the bottom of the **top pole (ALH)** with the slot in the top of the **middle pole (ALF)**. Secure the top pole to the middle pole with the hardware shown.

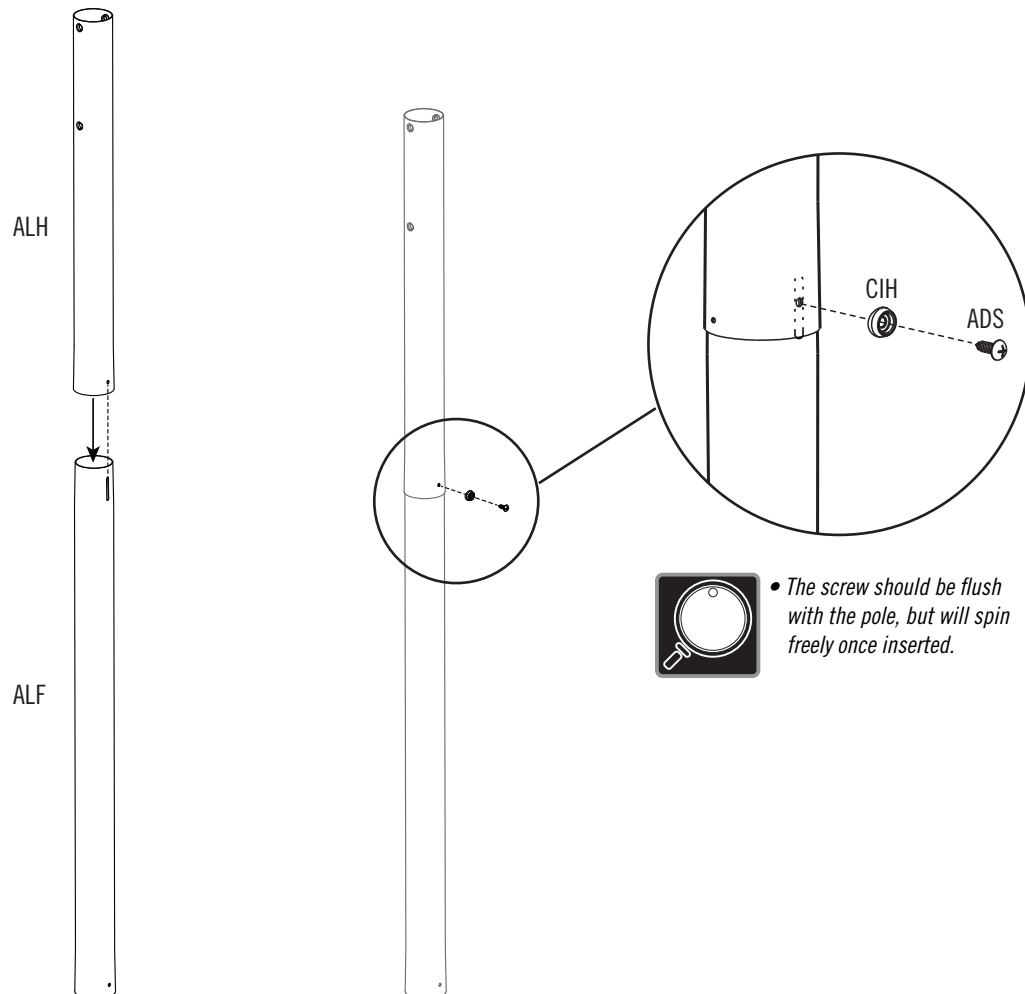


► SECTION 1 (CONTINUED)

TOOLS AND HARDWARE REQUIRED

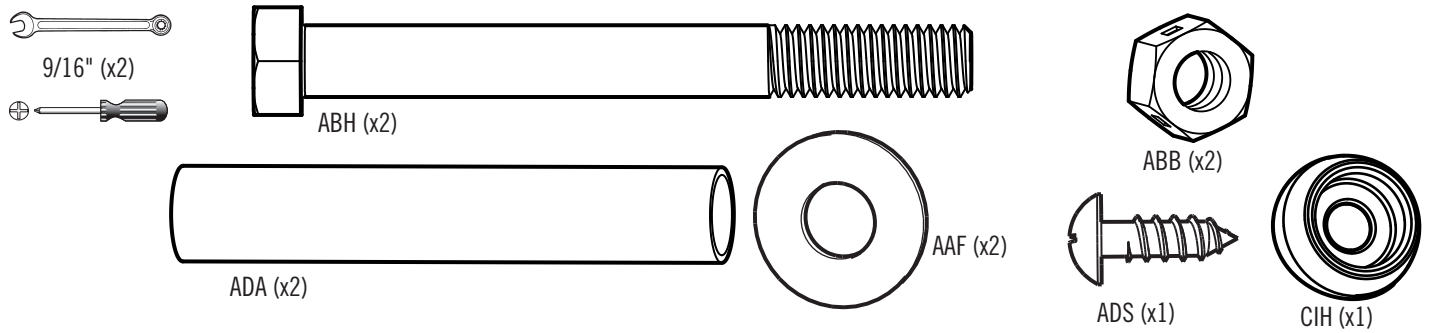


1.2

- Place the **pole bracket (ALL)** onto the **3/8" x 3 1/2" hex bolts (ABH)**, and attach it to the **bottom pole (ALE)** with the hardware as shown.

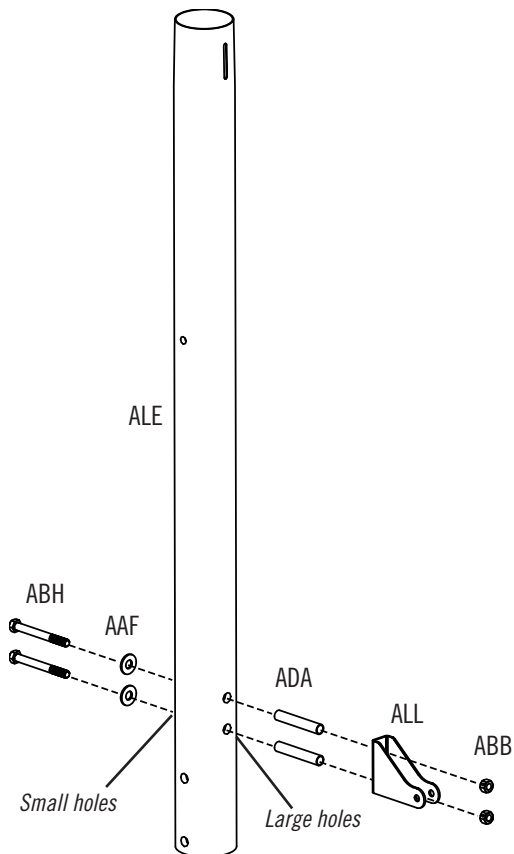


1.3

- Secure the middle pole to the **bottom pole (ALE)** using the same method as step 1.1.

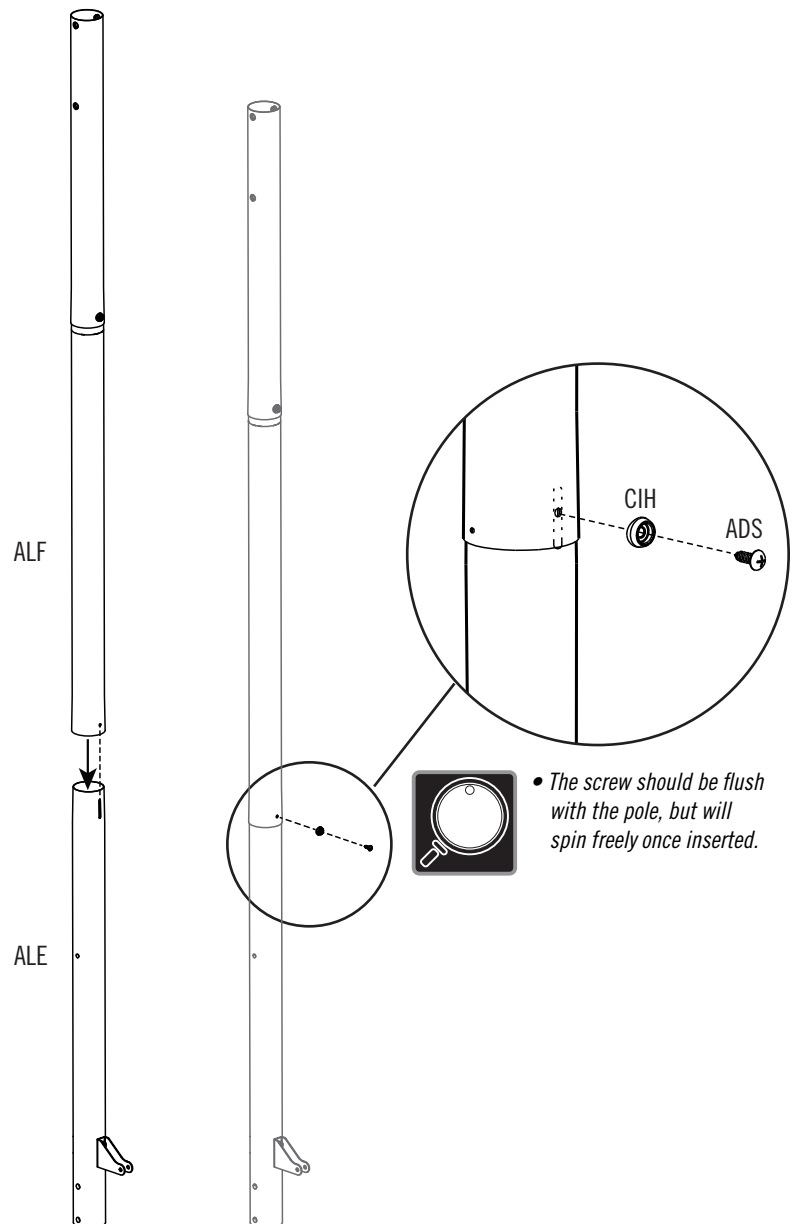

► SECTION 1 (CONTINUED)

TOOLS AND HARDWARE REQUIRED



1.4

- Strike the end of the pole assembly on a piece of scrap wood or cardboard 5–6 times.



- *Do not strike your feet with the pole sections, as serious injury may occur.*




WARNING

The poles must be seated together! Even if the poles cover the slots before seating, they must be struck on a hard surface five to six times! Failure to seat the poles correctly could allow the poles to separate during use, which could lead to serious personal injuries or property damage.


1.5

- **Repeat step 1.4 For the opposite end of the pole assembly.** Now that the pole assembly is seated, use a 10-foot tape measure to measure the pole from top to bottom to the nearest eighth of an inch. Write this measurement down in inches; you will need this later in the assembly.

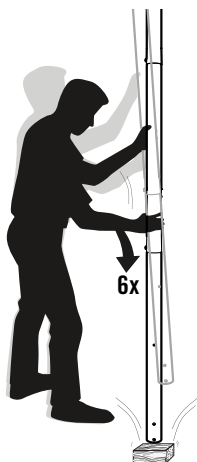

Measure from here...

...to here.



2


POLE-TO-BASE ASSEMBLY




HARDWARE REQUIRED




DSA (x1)
1/4" x 3"




ABN (x2)
1/2" x 1/8"



BTS (x1)
1/4"




AAE (x2)
5/16" x 1"



ABD (x4)
5/16"



AAO (x2)
5/16"

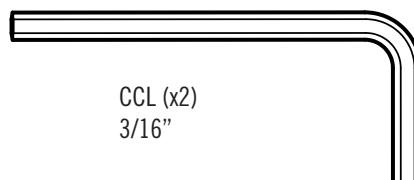


CCL (x2)
3/16"



PARTS REQUIRED

Metal Part



ALI (x2)




AJC (x1)




AJE (x1)

* The axle (AJE) is located in the parts bag.

Plastic Parts

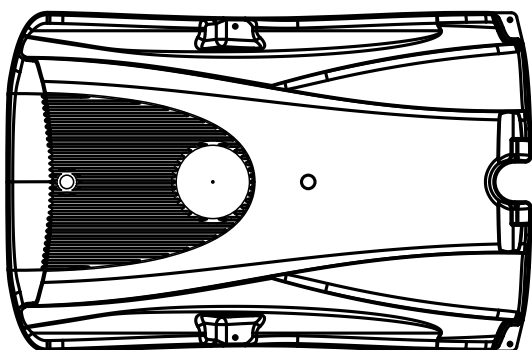

AJM (x1)




AMU (x2)



TOOLS REQUIRED




1/2"
(2)




(1)

► SECTION 2 (CONTINUED)

TOOLS AND HARDWARE REQUIRED

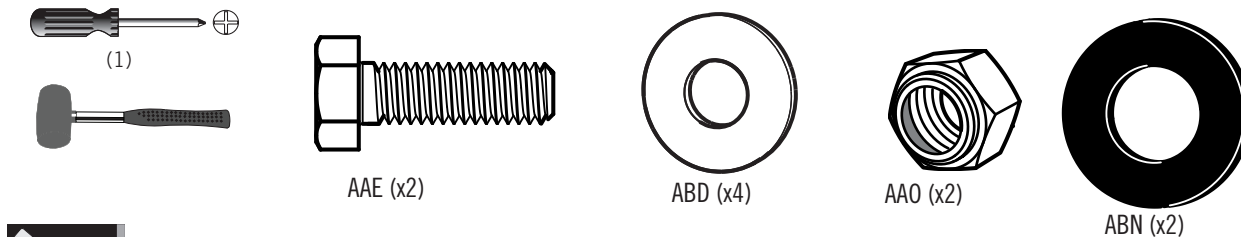



- If you have trouble with this section, scan the code below to view a video on the assembly.



• <http://go.lifetime.com/90593-section2>


2.1

- Attach the flattened end of the **pole brace (ALI)** to the **base (AJM)** with the hardware shown. **Only finger tighten the hardware for now.**

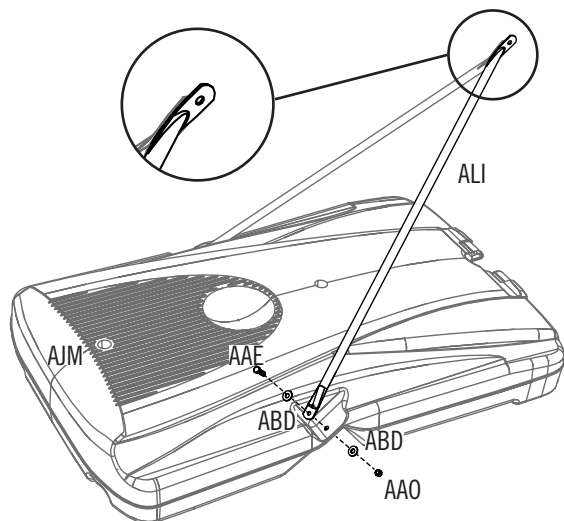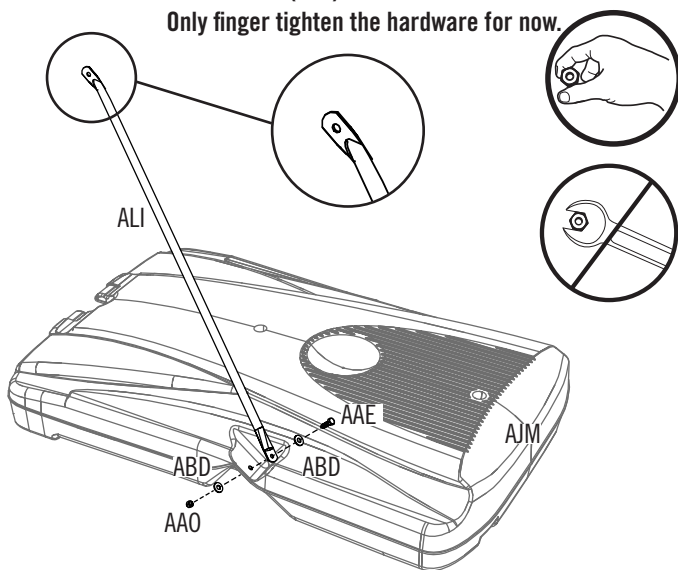



2.2

- Slide the **large axle (AJC)** through the **wheels (AMU)** and the holes at the end of the **bottom pole (ALE)** as shown. Slide the **small axle (AJE)** through the second set of holes near the end of the bottom pole. Then, slide a **1/2" x 1/8" spacers (ABN)** onto each end of the large axle, and position them against the wheels.

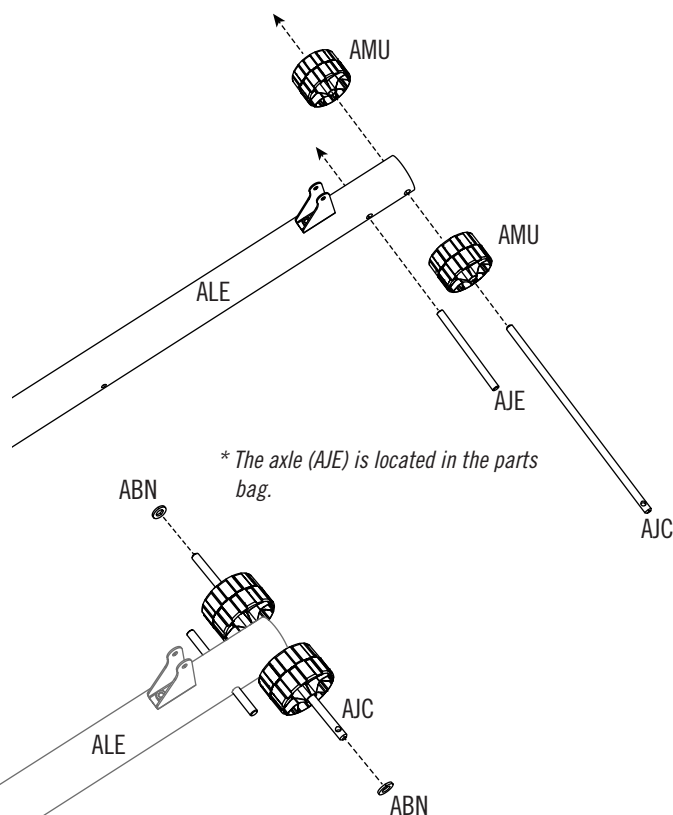



► SECTION 2 (CONTINUED)

TOOLS AND HARDWARE REQUIRED





2.3

- Place the pole assembly on the ground with the pole bracket on the bottom pole facing up. Position the **large axle (AJC)** under the bottom slots of the **base (AJM)** as shown, and step onto the base so the axle snaps into the slots. Then rotate the pole assembly upward so that the **small axle (AJE)** snaps into the upper slots of the base as shown. Secure the hardware shown using the hex wrenches provided.

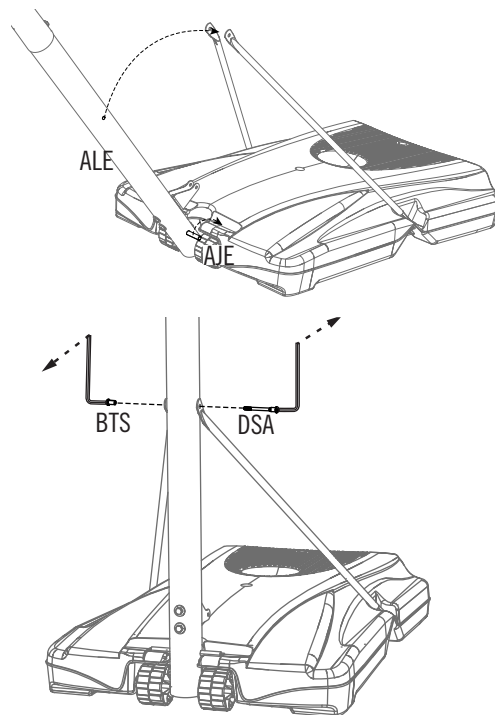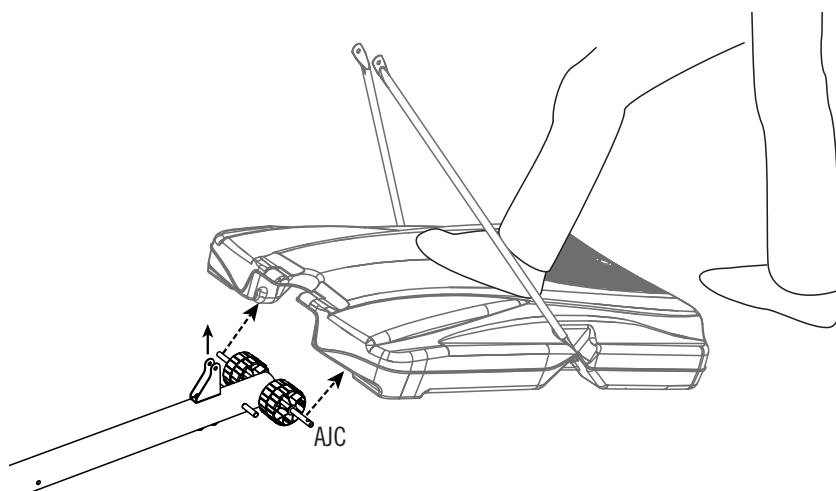

2.4

- Tip the system forward so the pole rests on the ground. Do not stand the system up until it is filled with either sand or water later in the assembly. Tighten the hardware shown.

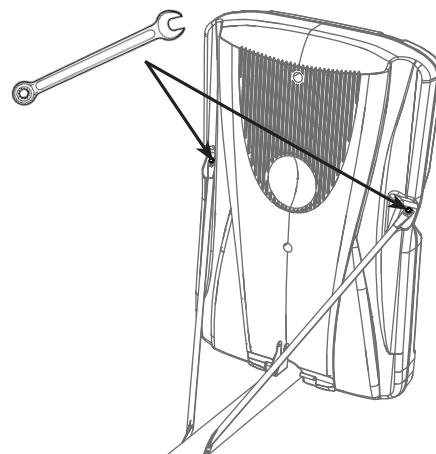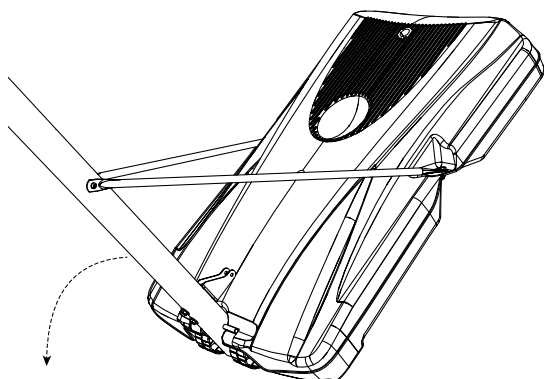


3


BACKBOARD-TO-RIM ASSEMBLY




HARDWARE REQUIRED




AAJ (x2)
5/16"




AAV (x2)
5/16"




ABK (x4)
5/16"




AAB (x2)
1/4"




ABD (x2)
5/16"




ABF (x2)
7/16"



AAS (x2)
1/4" x 2 3/4"




ABI (x2)
5/16" x 2 1/4"



ADQ (x2)
5/16" x 1"



ABS (x2)
1/4" x 2 5/16"



AOU (x1)




AJW (x2)



PARTS REQUIRED


Metal Parts



AJJ (x1)



AJK (x1)




AJY (x1)



AOX (x1)




AOW (x1)

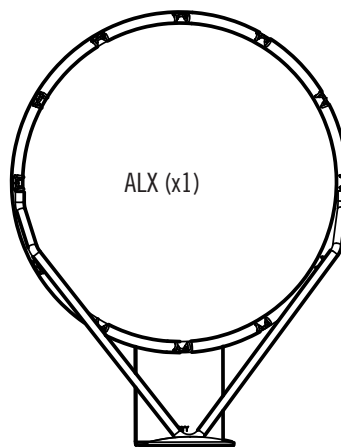

ALX (x1)


Plastic Parts

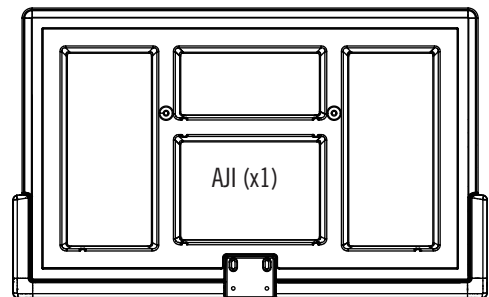

AJI (x1)




TOOLS REQUIRED



1/2"

(2)




3/8"

(2)





(1)




(1)

► SECTION 3 (CONTINUED)

TOOLS AND HARDWARE REQUIRED





- If you have trouble with this section, scan the code below to view a video on its assembly.



- <http://go.lifetime.com/90593-section3>


3.1

- Slide the **U-bolt (AOU)** through the **left** and **right backboard brackets (AJJ and AJK)**. The u-bolt must rest in the notches of the backboard brackets as shown.

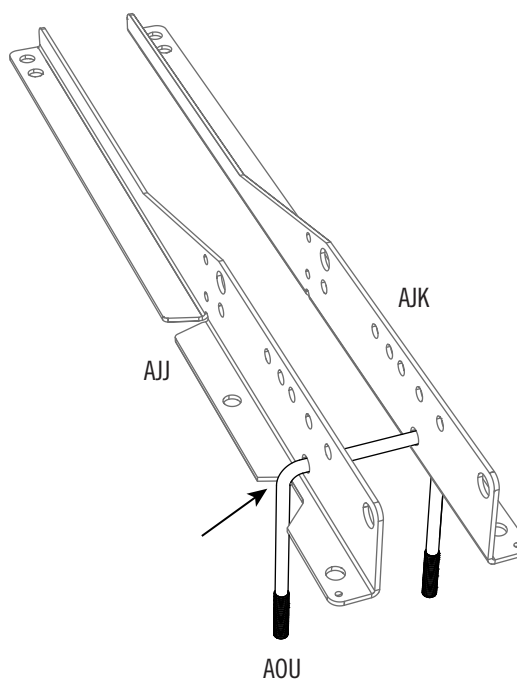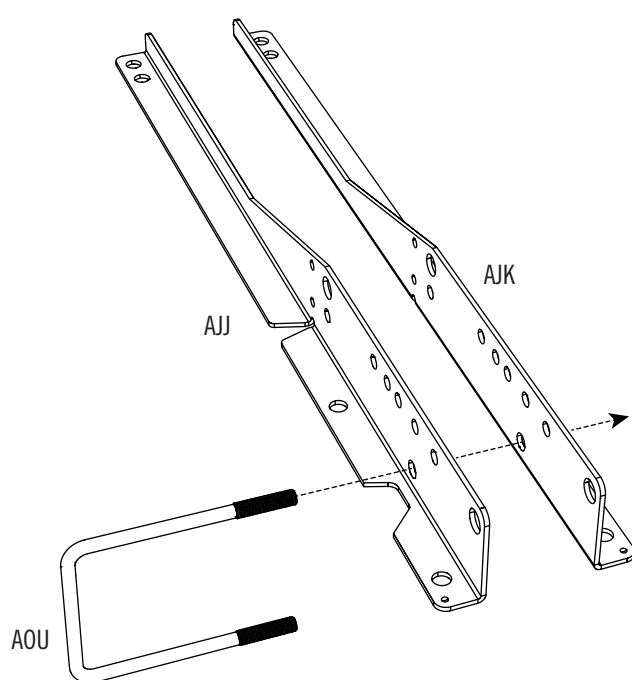

► SECTION 3 (CONTINUED)

TOOLS AND HARDWARE REQUIRED



AAS (x2)





ABS (x2)



AAB (x2)

3.2


- Slide one 1/2" spacer (ABS) through the counterbalance spring (AJY), then finger-tighten them to the backboard brackets as shown. **DO NOT** tighten the nuts yet.

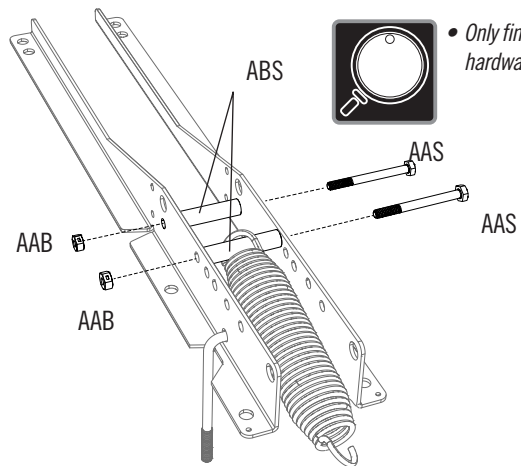

- Only finger-tighten this hardware for now.

3.3

- Place the backboard bracket assembly and rim support channel (AOX) to the backboard (AJI) as shown.

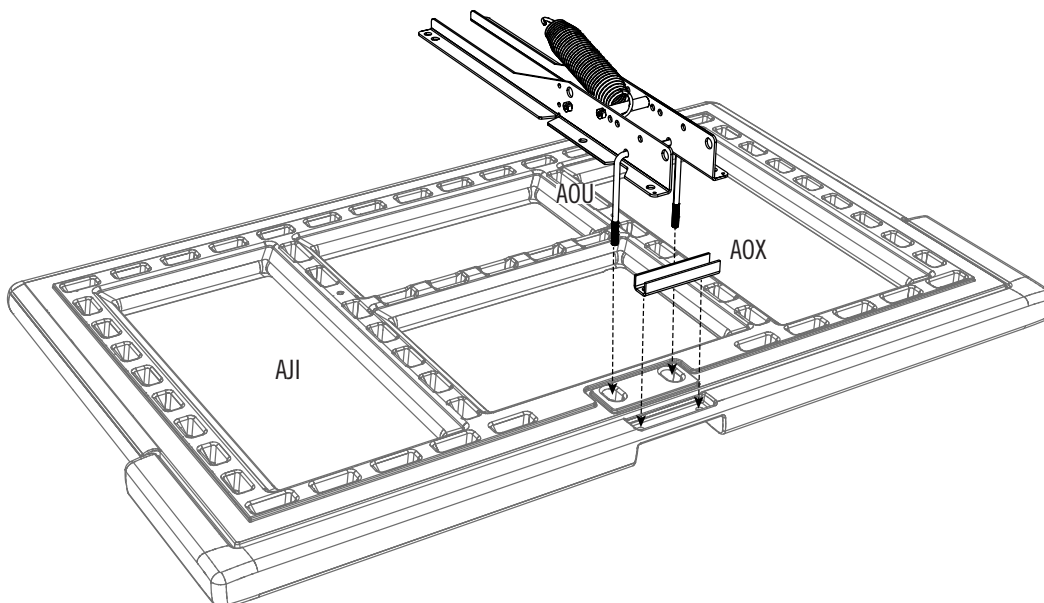

► SECTION 3 (CONTINUED)


TOOLS AND HARDWARE REQUIRED




1/2" (x2)




(x1)




ABI (x2)




ABD (x2)



ABF (x2)



AAJ (x2)




AAV (x2)






ABK (x2)

3.4


- Insert two 5/16" x 2 1/4" tap bolts (ABI) with the 5/16" washers (ABD) and the 7/16" rubber washers (ABF) through the bottom holes in the back of the rim (ALX) as shown, and secure the hardware with two 5/16" hex t-nuts (AAJ).

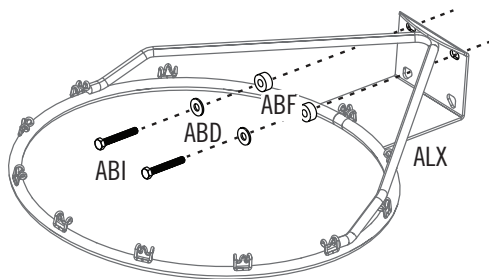

- Make sure that the tap bolts are positioned on the outside edge of the holes as shown.

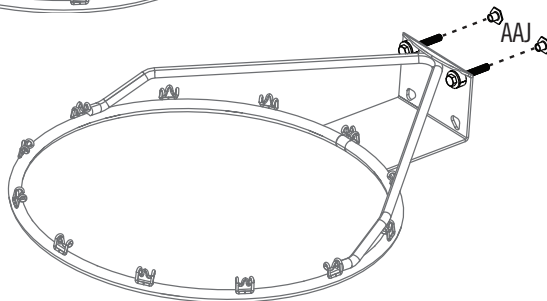

Incorrect




Correct



- DO NOT overtighten the hardware so that the 7/16" rubber washers bulge outward as shown.



3.5

- Secure rim assembly to the backboard with the hardware as shown.

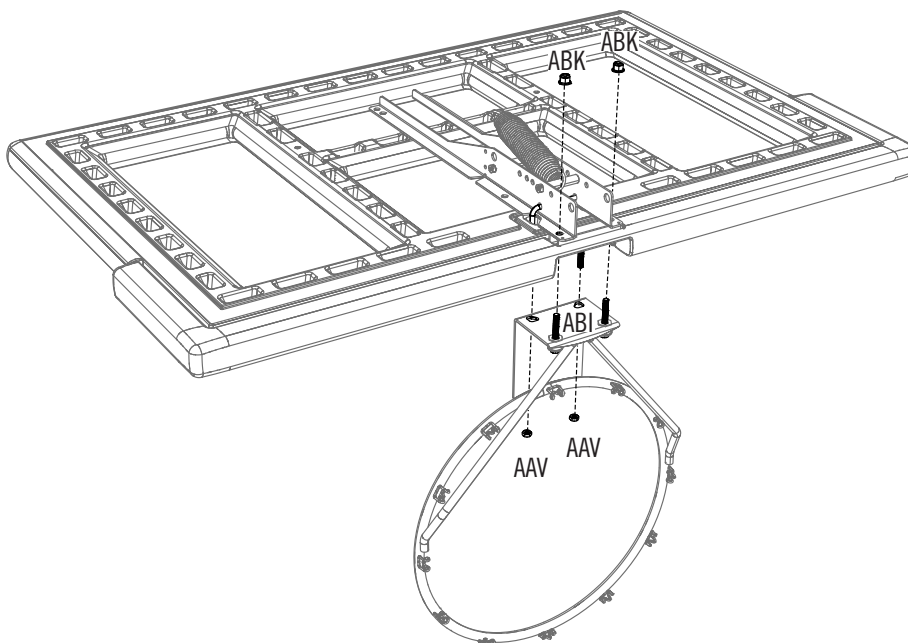



► SECTION 3 (CONTINUED)

TOOLS AND HARDWARE REQUIRED






3.6

- Slide the **compression springs (AJW)** onto the **U-bolt (AOU)**, and place the **spring retainer plate (AOW)** over the compression springs. Tighten the **5/16" nylock flange nuts (ABK)** until the **rim (ALX)** does not wobble to complete this step.

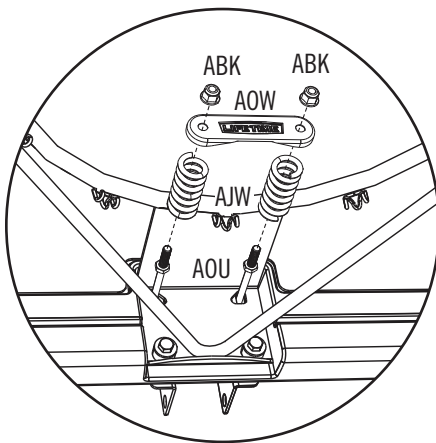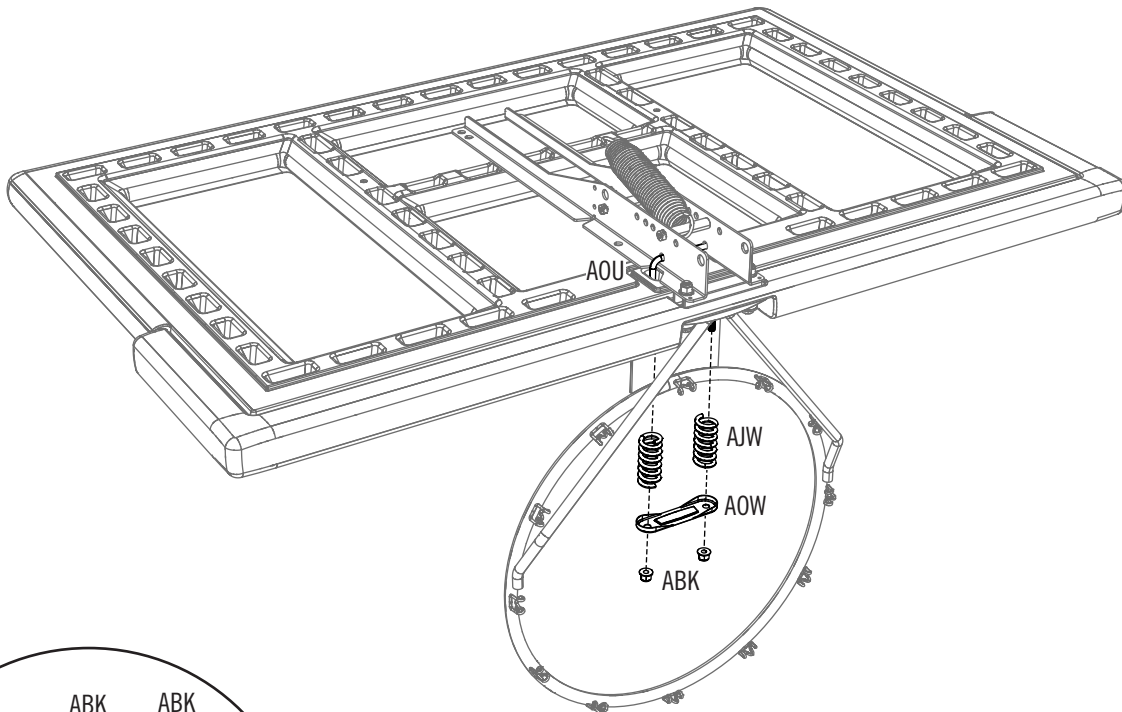


► SECTION 3 (CONTINUED)

TOOLS AND HARDWARE REQUIRED




3.7

- Bend the **left** and **right backboard brackets (AJJ and AJK)** outward by hand and position the holes in the backboard brackets over the holes in the **backboard (AJI)**. Then securely fasten the backboard brackets to the backboard with the hardware shown.

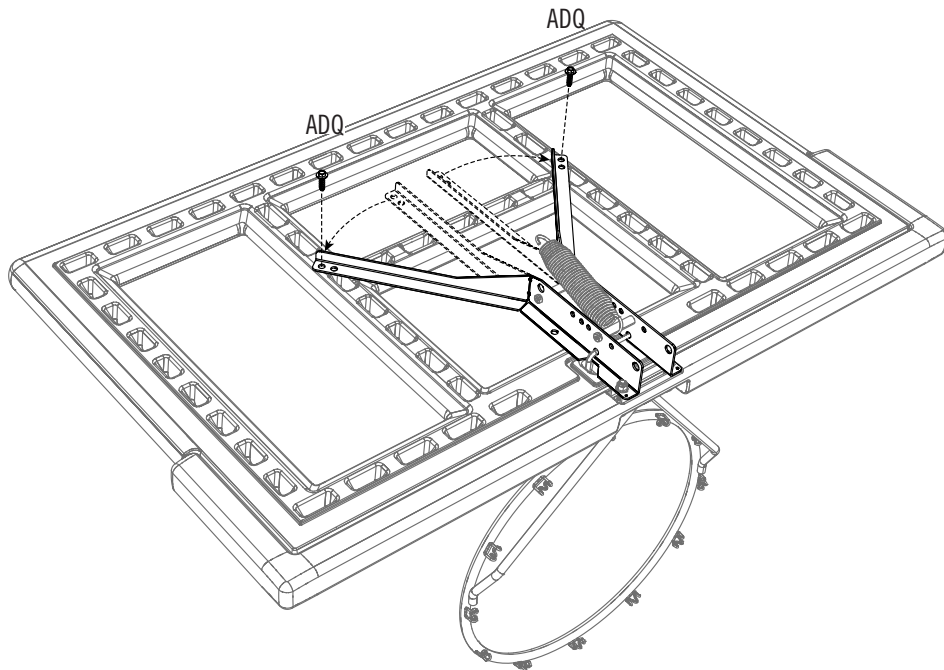

3.8

- Tighten the hardware in the locations indicated.

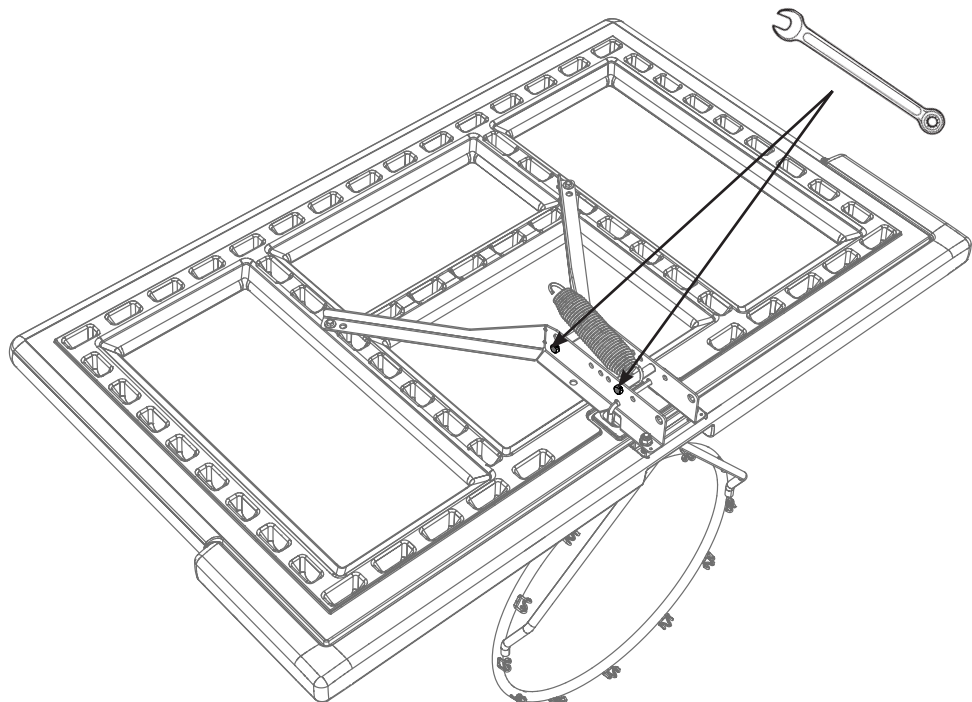


4


BACKBOARD-TO-POLE ASSEMBLY




HARDWARE REQUIRED

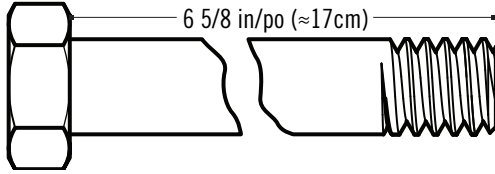


ADG (x4)
1/2" x 6 5/8"



ABP (x4)
1/2" x 3/8"



ABL (x4)
.69" x .59"




AAX (x4)
1/2"




PARTS REQUIRED

Metal Parts




AKC (x2)




AKB (x2)



TOOLS REQUIRED




(1)




(2)

► SECTION 4 (CONTINUED)

TOOLS AND HARDWARE REQUIRED

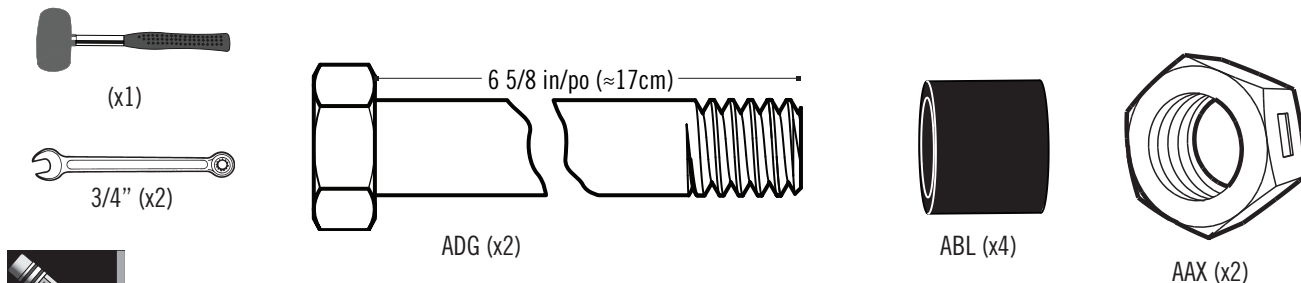


- If you have trouble with this section, scan the code below to view a video on the assembly.



- <http://go.lifetime.com/90590-section4>

4.1

- Secure the **short extension arms (AKC)** and **long extension arms (AKB)** to the backboard brackets in the location shown with the hardware indicated.

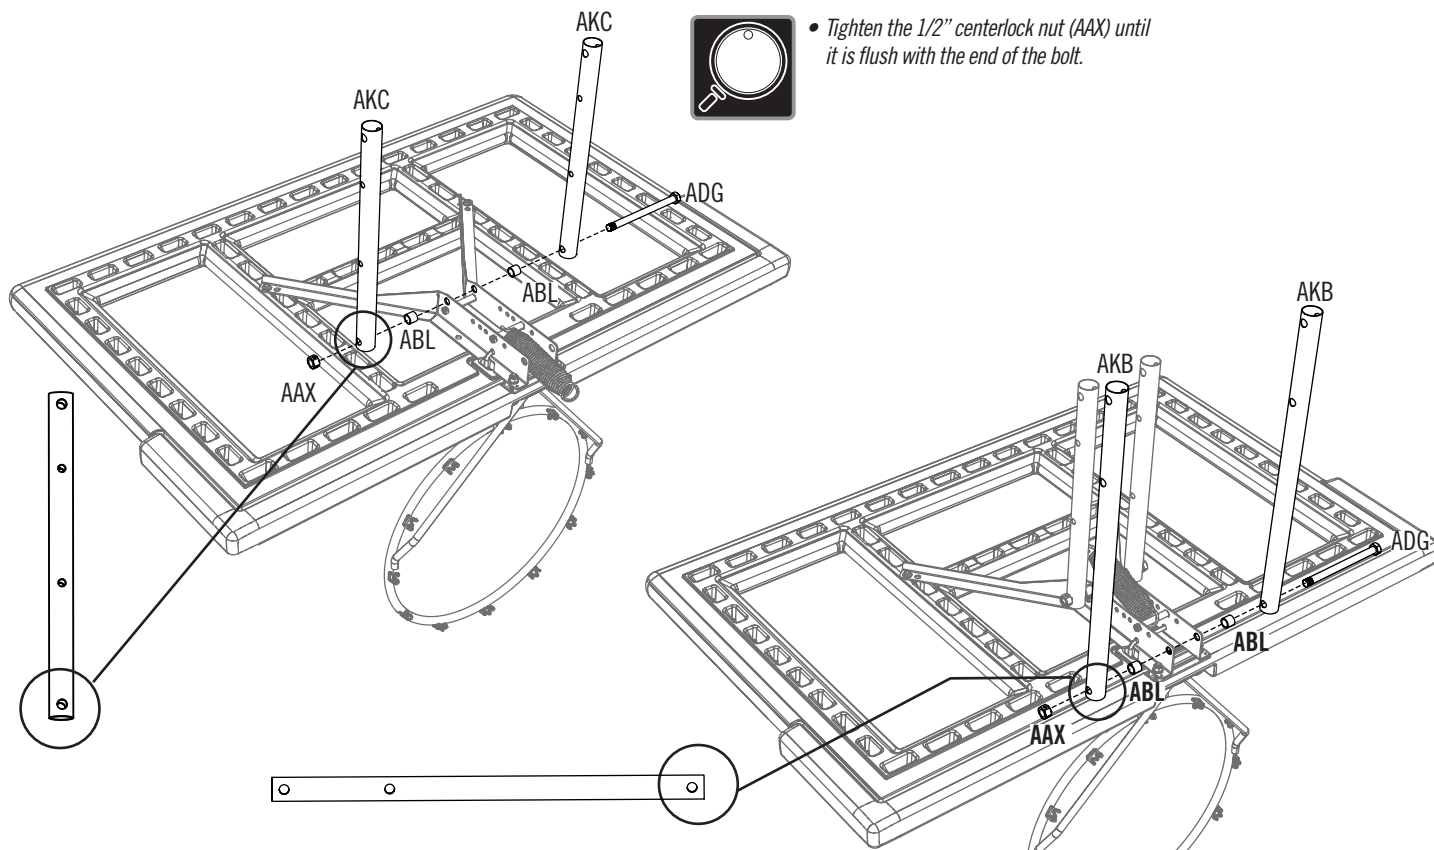

► SECTION 4 (CONTINUED)


TOOLS AND HARDWARE REQUIRED




(x1)




3/4" (x2)

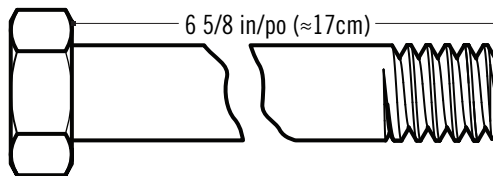

ADG (x2)




ABP (x4)




AAX (x2)

4.2

- Lay the backboard and rim assembly on the ground next to the pole assembly. Rest the rim on cardboard to prevent scratching. Then secure the **short** and **long extension arms (AKC and AKB)** to the pole assembly with the hardware shown.

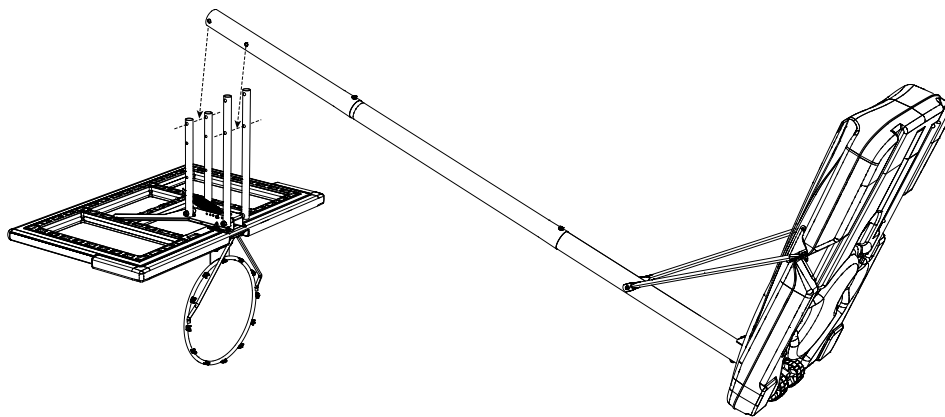

- Tighten the 1/2" centerlock nut (AAX) until it is flush with the end of the bolt.

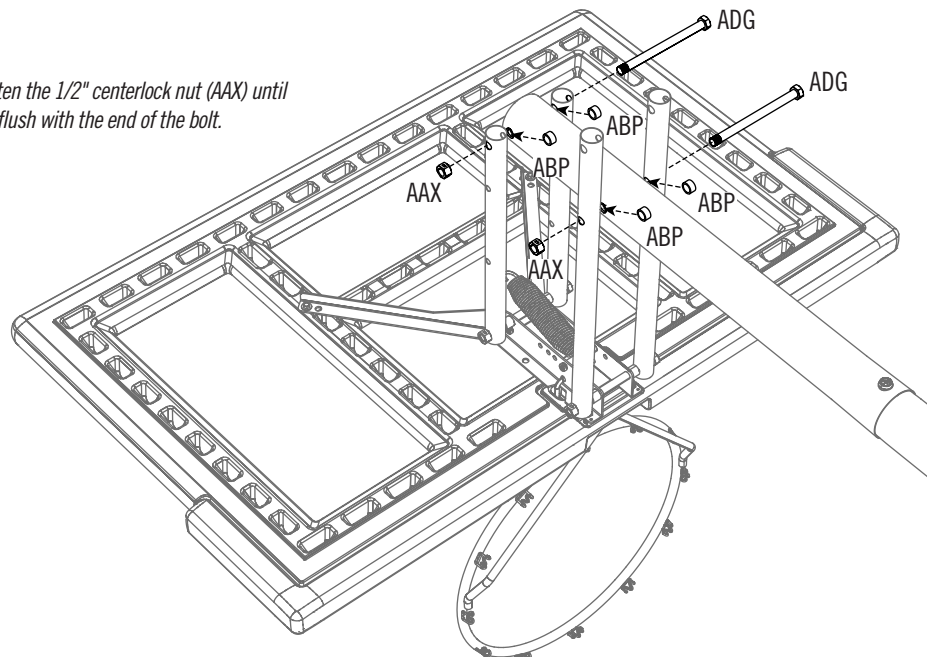


5

HANDLE ASSEMBLY




HARDWARE REQUIRED

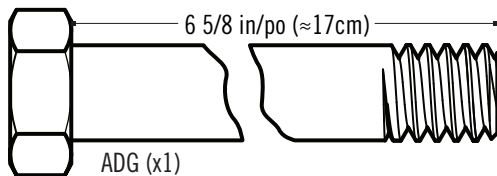


ADG (x1)
1/2" x 6 5/8"




ACZ (x2)
0.69" x 1.4"




AAX (x1)
1/2"

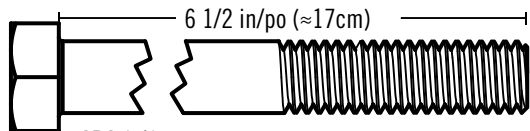


ABA (x1)
3/8" x 6 1/2"




AAM (x1)
5/16" x 1 1/2"



BSJ (x2)
1/4" x 1 3/4"



EKD (x2)
1/4" x 1.175"




EJW (x4)
#8



BZA (x2)
#10



ADT (x4)
#6



EJZ (x2)





ABB (x1)
3/8"




AAN (x1)
5/16"



DHK (x2)
1/4"



CXK (x2)
#10



EKA (x1)
1/4"



AZP (x2)
1/4"



PARTS REQUIRED


Metal Parts



EJT (x1)




EKB (x1)




EJV (x1)



EKC (x1)




EJY (x1)




EJU (x1)


Plastic Parts



AKM (x1)



AKN (x1)



EJX (x1)




EKL (x1)




TOOLS REQUIRED




(2)




(2)



(2)



(2)



(2)



(1)



(1)



PARTS IDENTIFIER

This page intentionally left blank

Detach this yellow section for use as a quick reference




PARTS IDENTIFIER

Metal Part



ALH (x1)




ALF (x1)




ALE (x1)




EJT (x1)




EKB (x1)




ALI (x2)




EKC (x1)



AJY (x1)



ALL (x1)

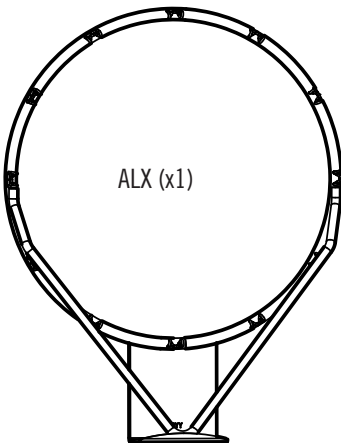


ALX (x1)




AOW (x1)




AOX (x1)




AJC (x1)



AJE (x1)



AKB (x2)




AKC (x2)



AJJ (x1)




AJK (x1)




EJV (x1)

* The axle (AJE) is located in the parts bag.



EJV (x1)




EJU (x1)

Detach this yellow section for use as a quick reference




PARTS IDENTIFIER


Plastic Parts

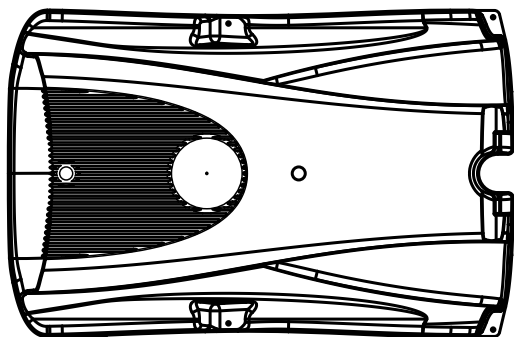


AJM (x1)

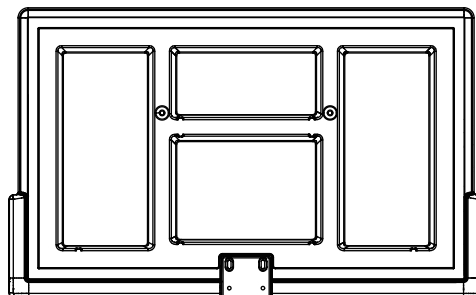


AJI (x1)



AMU (x2)



AKM (x1)




AKN (x1)




EKL (x1)



AEF (x2)

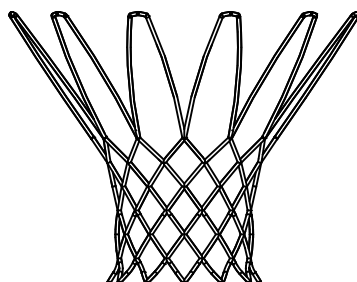

AKZ (x1)



EJX (x1)



AKP (x1)



HARDWARE REQUIRED



Detach this yellow section for use as a quick reference




PARTS IDENTIFIER

Detach this yellow section for use as a quick reference


This page intentionally left blank

► SECTION 5 (CONTINUED)

TOOLS AND HARDWARE REQUIRED




7/16" (x2)




BSJ (x2)



AZP (x2)




EKA (x1)



EJZ (x2)






- If you have trouble with this section, scan the code below to view a video on the assembly.



- <http://go.lifetime.com/90593-section5>

5.1


- Align the **pedal bracket (EJY)** with the **pedal support bracket (EJU)**, then secure them with the hardware shown.

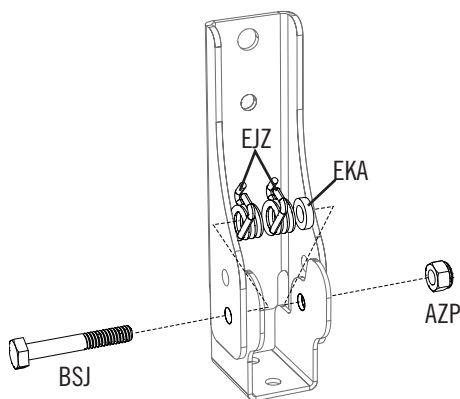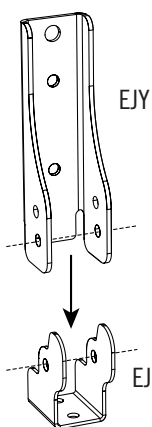

- Make sure the springs and spacer are oriented as shown.

5.2

- Secure another **bolt (BSJ)** over the top of the springs.

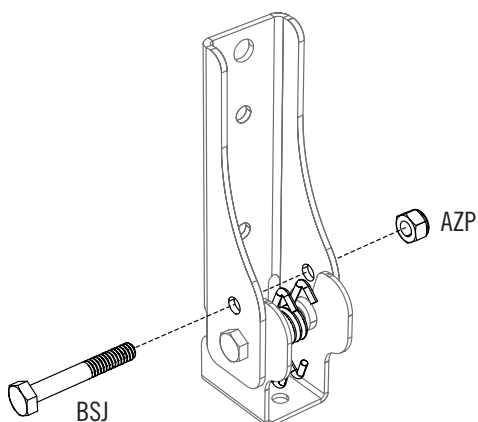

- Do not overtighten this hardware. The pedal bracket needs to be able to pivot on the support bracket.





- Make sure the two springs are on the same side of the bolt as shown.

► SECTION 5 (CONTINUED)

TOOLS AND HARDWARE REQUIRED



(x1)





EJW (x2)

5.3

- Align the assembly to the **outer tube (EJT)**, then use a rubber mallet to strike them until the holes on the **pedal support bracket (EJU)** line up with the small pilot holes at the end of the outer tube. Use the **self-tapping screws (EJW)** to secure the bracket assembly to the outer tube.




- The foot bracket assembly should be met with some resistance from the springs installed in the previous step. Ensure the springs are oriented as shown when performing this step. If there is no resistance when installing the bracket assembly to the outer tube, make sure the springs are engaging the outer tube, then try the step again.*

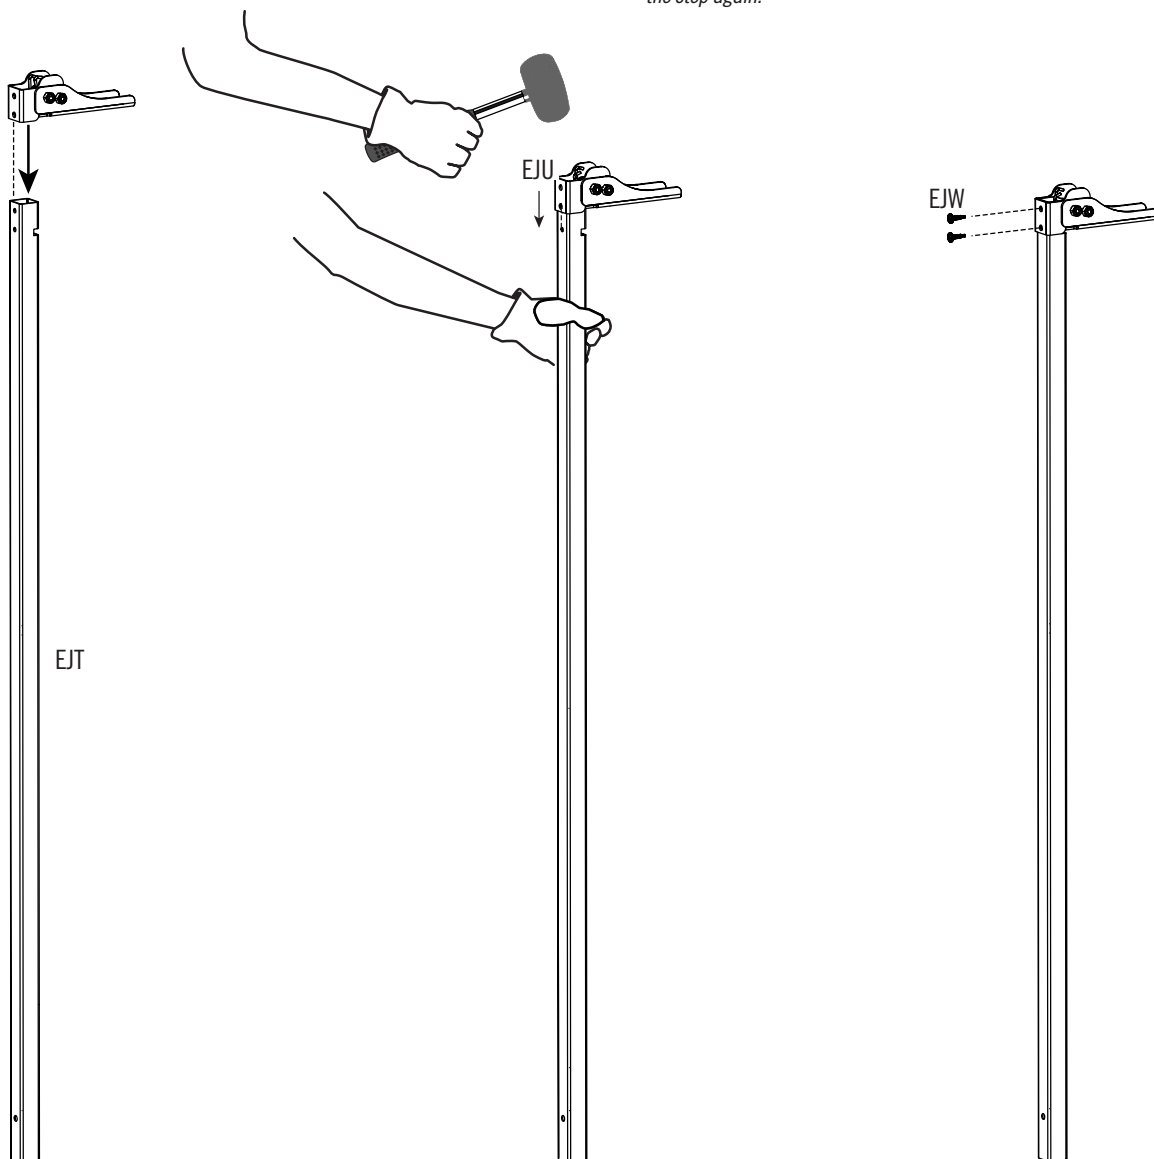

► SECTION 5 (CONTINUED)

TOOLS AND HARDWARE REQUIRED



(x1)



3/8" (x2)




BZA (x2)



CXK (x2)

5.4


- Press down on the bracket assembly on the **outer tube (EJT)**, then insert the **inner channel (EJV)** into the outer tube.

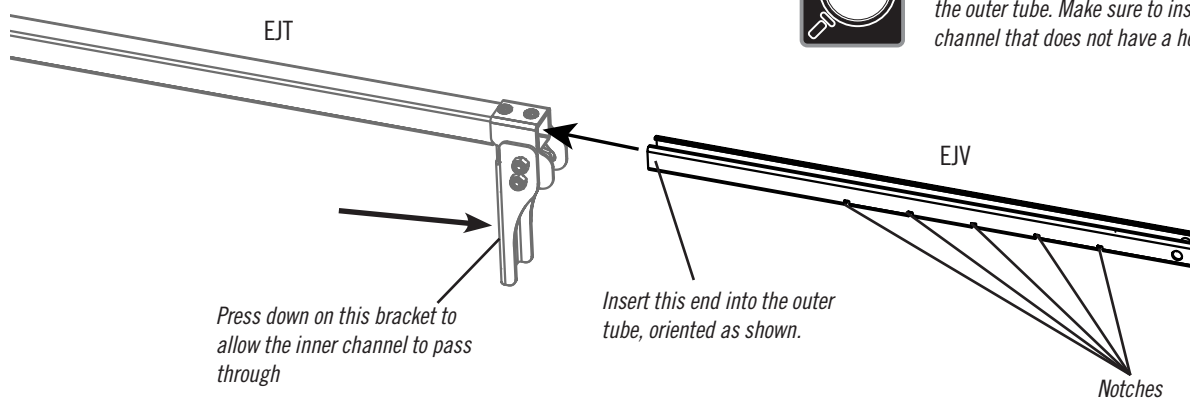


- The multi-notched side of the inner channel should face the same direction as the bracket assembly on the outer tube. Make sure to insert the end of the channel that does not have a hole.

5.5

- Secure the **pedal (EJX)** to the **pedal bracket (EJY)** with the hardware shown.

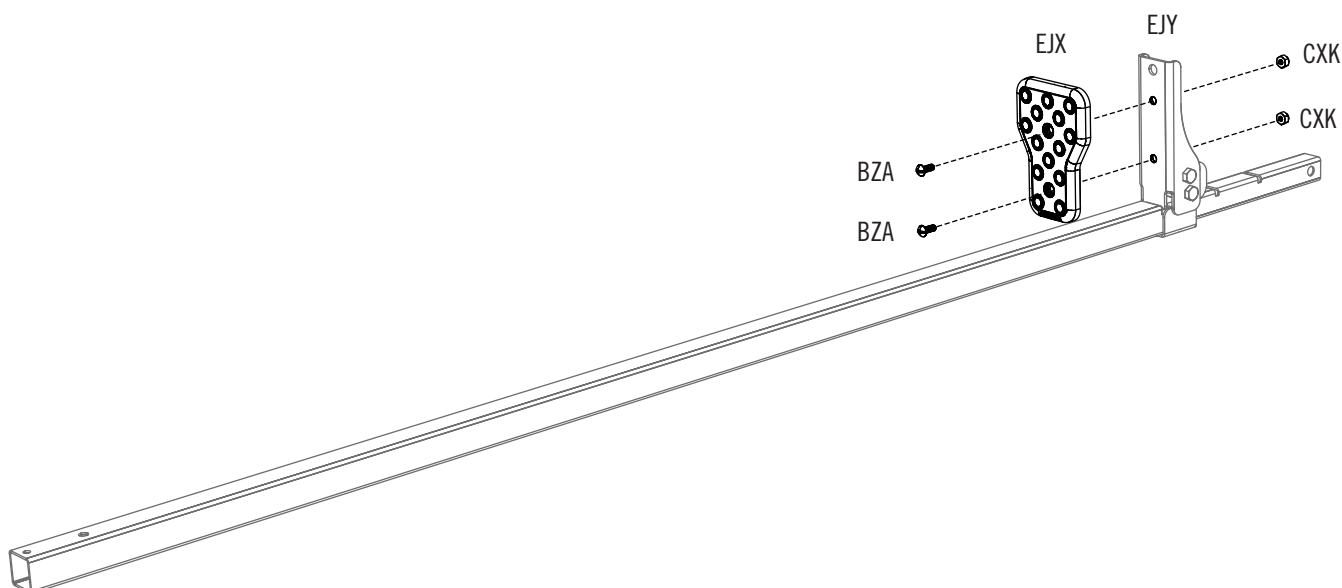


► **SECTION 5 (CONTINUED)**
 TOOLS AND HARDWARE REQUIRED



5.6

- Use **the measurement of the pole taken in step 1.5** to determine the hardware location for the **lifter arm bracket (EKC)**. Use the following chart to complete the assembly of the next two steps.


Pole Assembly Height (in inches)	Hole on the Bracket (Step 5.7 and 5.8)
109 7/8"	3 and A
110	4 and B
110 1/8"	2 and A
110 1/4"	3 and B
110 3/8"	4 and C
110 7/16"	1 and A
110 1/2"	2 and B
110 5/8"	3 and C
110 3/4"	4 and D
110 7/8"	2 and C
111	3 and D
111 1/8"	1 and D
111 1/4"	2 and D

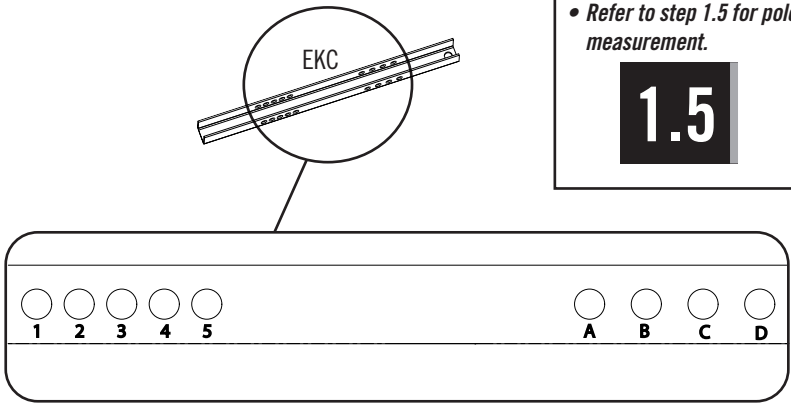

- The coordinating points refer to the location you will need to place the hardware. *For example*, if your pole measures 110 1/2 inches once seated, your coordinating points are 2 and B. In this example, place bolt (EKD) and nut (DHK) from step 5.7 into hole 2, and place the hardware from step 5.8 into hole B. If the rim still does not reach ten feet, use the next set of holes down on the chart.




5.7

- Insert the **lifter arm bracket (EKC)** to the **lifter arm (EKB)**, then secure them with the hardware indicated. Refer to the chart in step 5.6 To determine which hole location to use in your assembly.

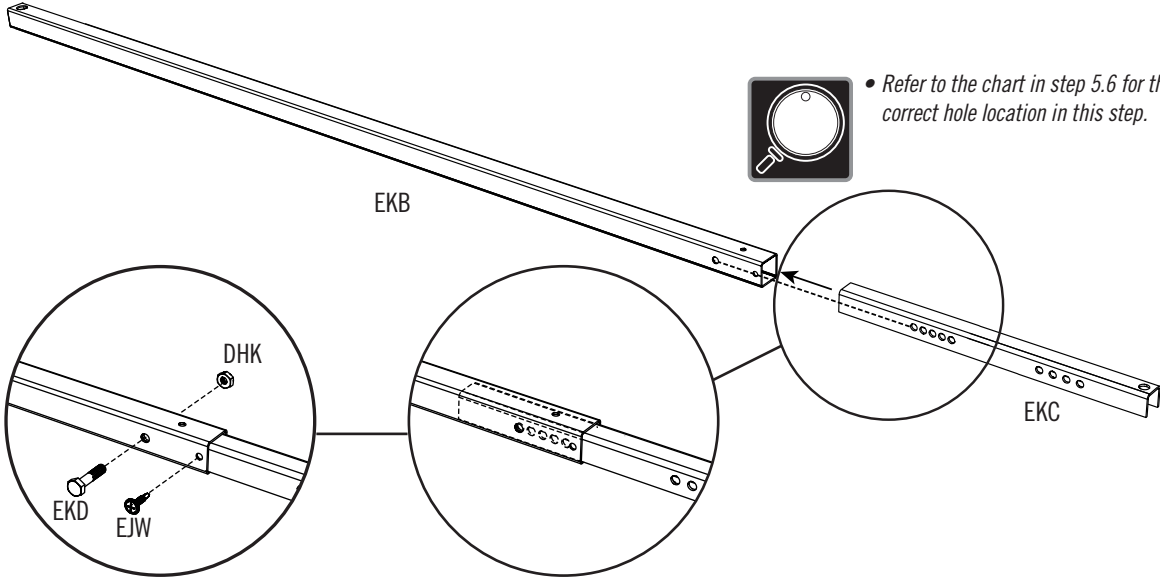


► SECTION 5 (CONTINUED)

TOOLS AND HARDWARE REQUIRED



5.8

- Insert **lifter arm bracket (EKC)** to **outer tube (EJT)**, then secure them with the hardware shown.

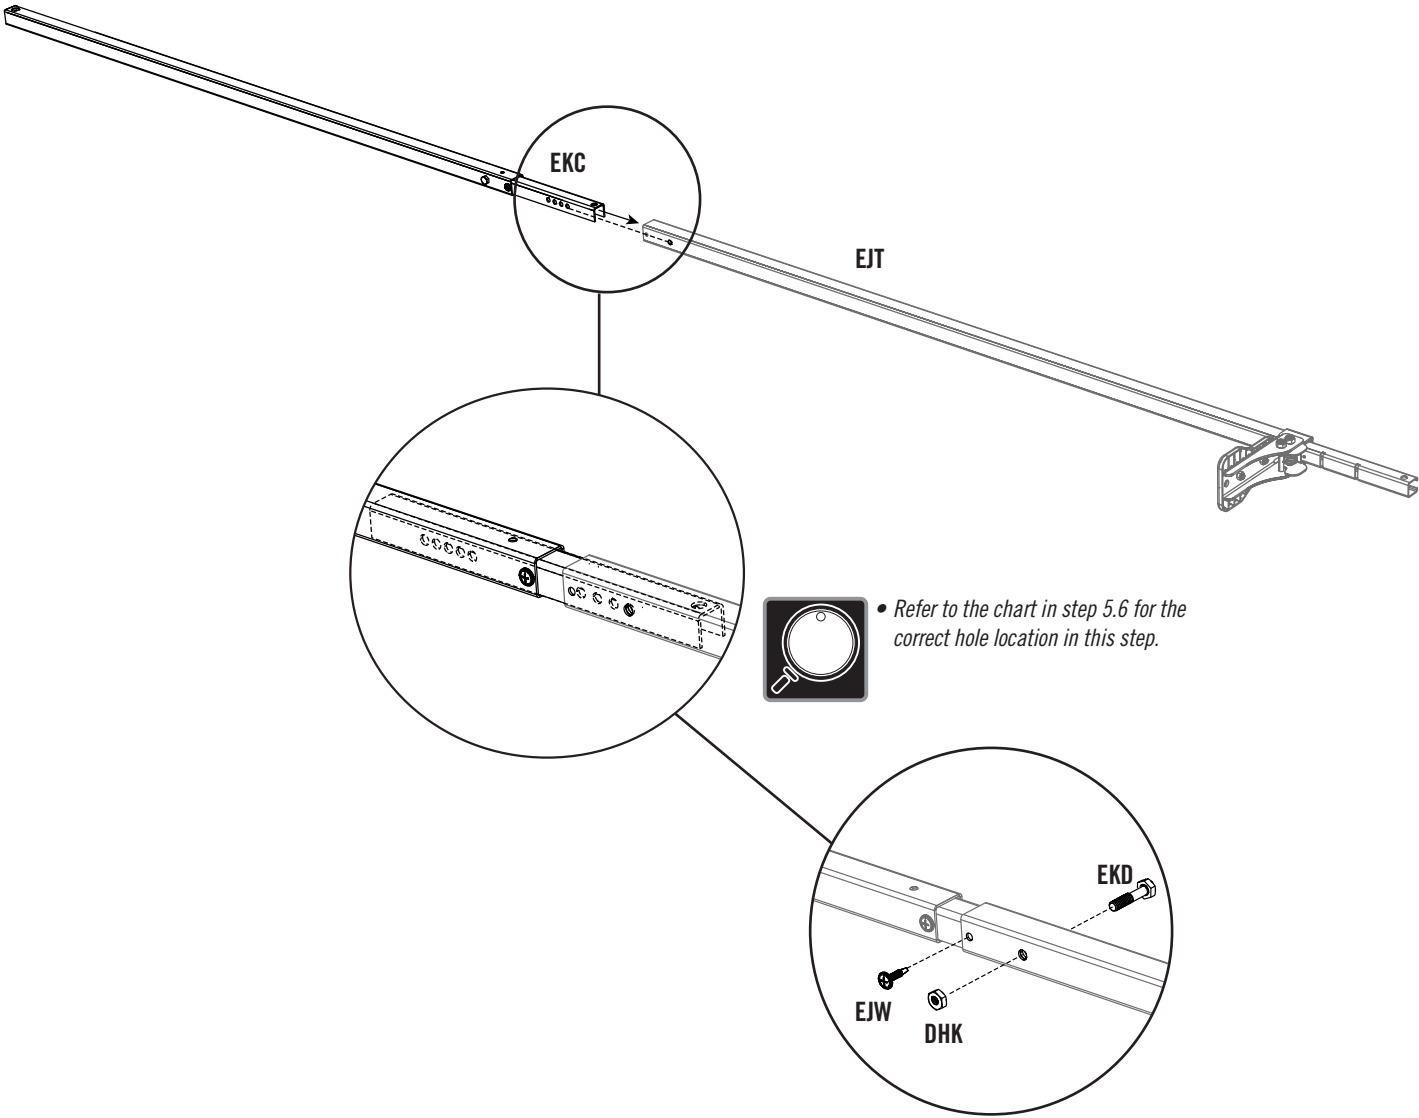

► SECTION 5 (CONTINUED)

TOOLS AND HARDWARE REQUIRED




(x1)



ADT (x4)


5.9

- Insert **plug (EKL)** into the **lifter arm (EKB)** as shown.

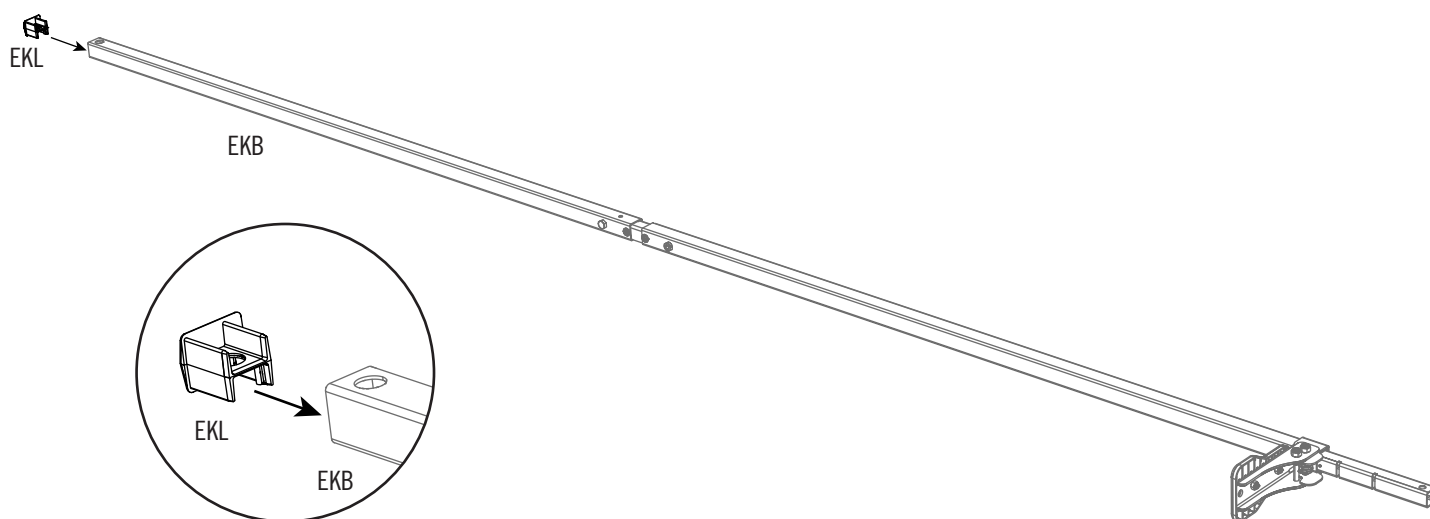


5.10

- Secure the **left and right handles (AKM and AKN)** to the assembly with the hardware shown.






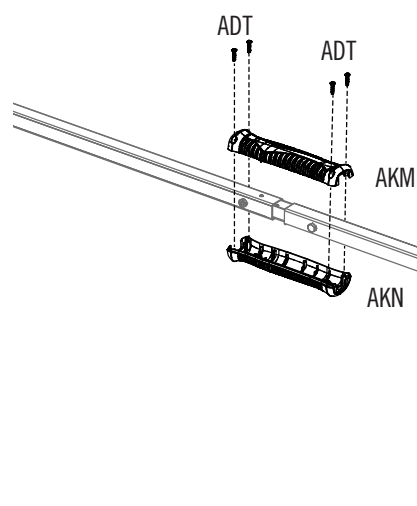


- *Handle peices come together at the top to form an arrow shape that will point toward the pole when the assembly is finished.*

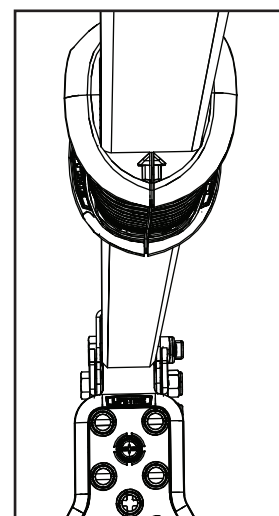


► SECTION 5 (CONTINUED)

TOOLS AND HARDWARE REQUIRED

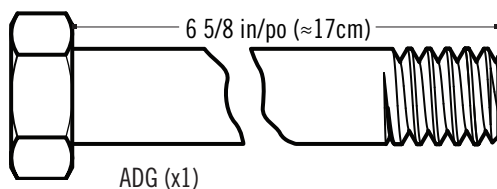



5.11

- Align the handle assembly as indicated, then secure it with the hardware shown.

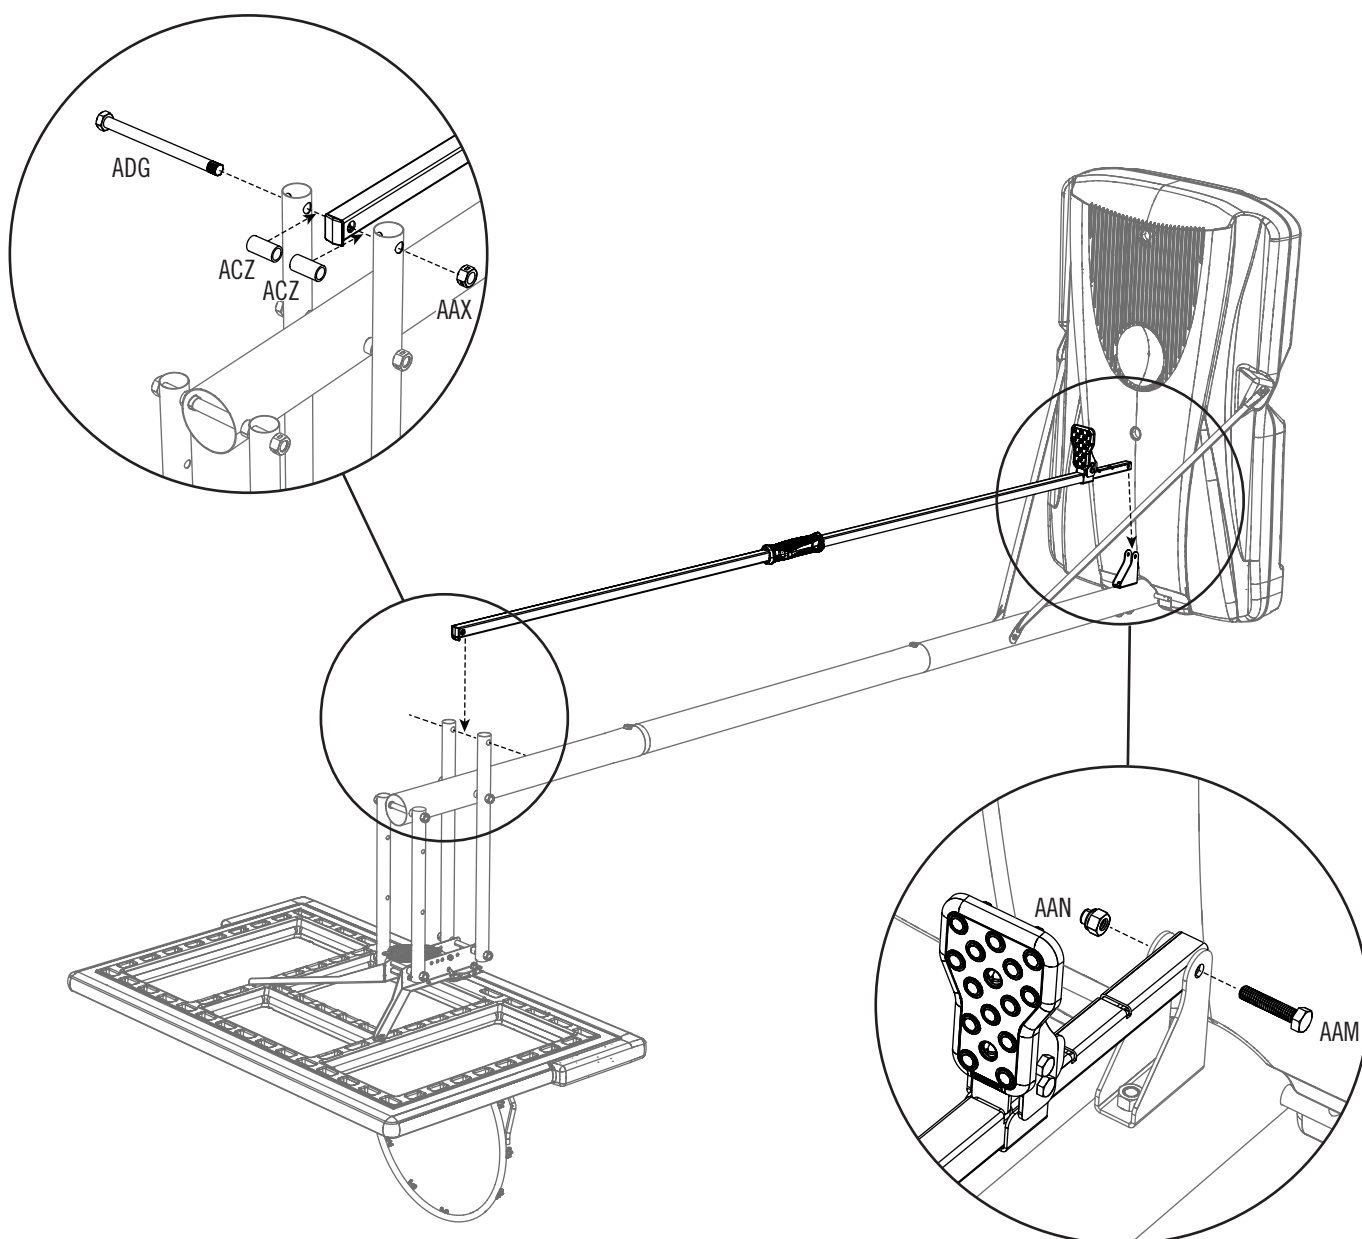


► SECTION 5 (CONTINUED)

TOOLS AND HARDWARE REQUIRED

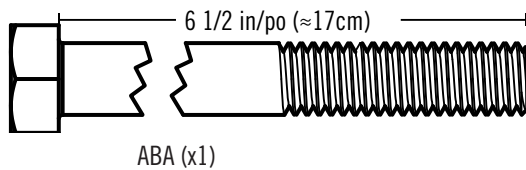



5.12

- Insert the **3/8" x 6 1/2"** hex bolt (ABA) through the holes in the **short extension arms (AKC)** that are closest to the pole. Secure it to the short extension arms with the **3/8"** centerlock nut (ABB).

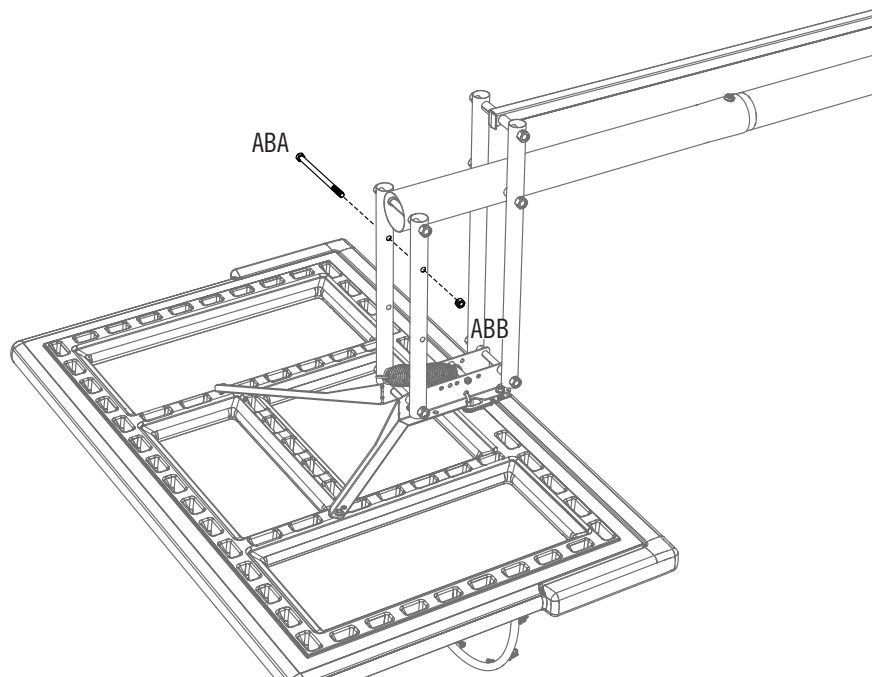

5.13

- Raise the backboard to the highest position. Using the closed end of a wrench, stretch the **counterbalance spring (AJY)** up and over the **3/8" x 6 1/2"** hex bolt (ABA) as shown.

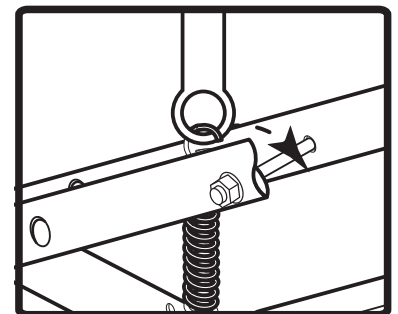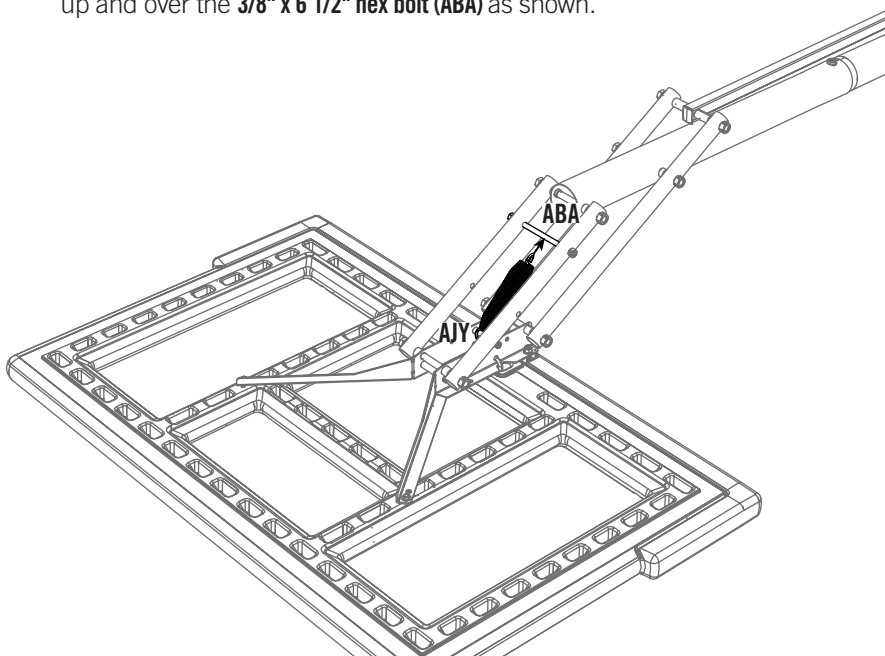

6

FINAL ASSEMBLY




HARDWARE REQUIRED




PARTS REQUIRED

Plastic Parts

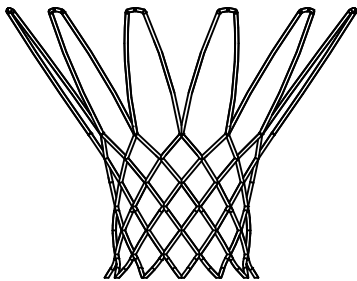

AKZ (x1)



AEF (x2)



AKP (x1)



TOOLS REQUIRED



(1)



(1)



362 lb (≈163 kg)

► SECTION 6 (CONTINUED)

TOOLS AND HARDWARE REQUIRED



- If you have trouble with this section, scan the QR code below to view the assembly video.


 YouTube



- <http://go.lifetime.com/howtofillthebase>


6.1

- Attach the **net (AKZ)**.

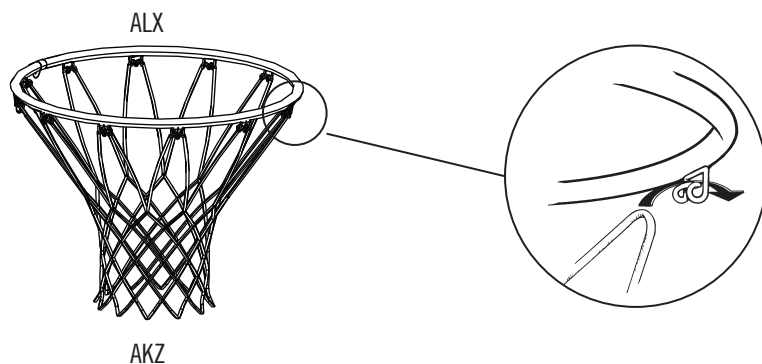

6.2

- Remove the plastic film from the backboard.

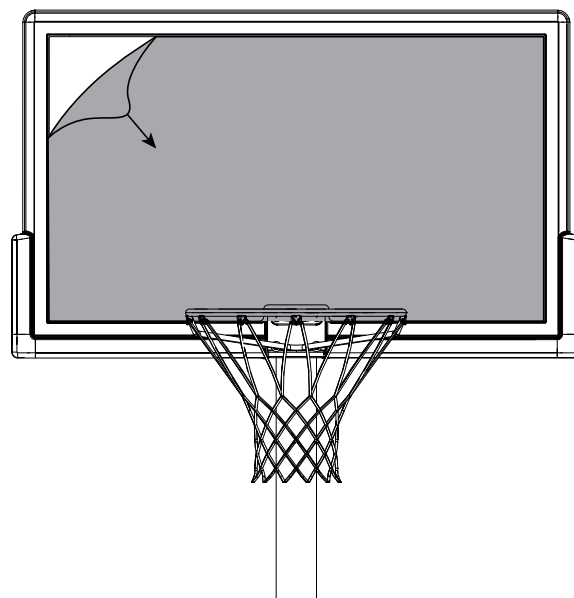

► SECTION 6 (CONTINUED)

TOOLS AND HARDWARE REQUIRED



310 lb (≈141 kg)





Two adults are required to complete this part of the assembly. To prevent serious injuries, the pole should be held down by one adult at all times while the base is being filled.

6.3A

• Option A: Filling with sand

(310 lb of sand required)

- Insert a **base plug (AEF)** into the **base (AJM)** in the hole closest to the pole.
- Using a funnel, fill the base with sand through the hole furthest from the pole until the sand is just below the hole.
- Using two adults, stand the base up on a flat surface and finish filling the base with sand.
- Insert the other base plug into the hole furthest from the pole.

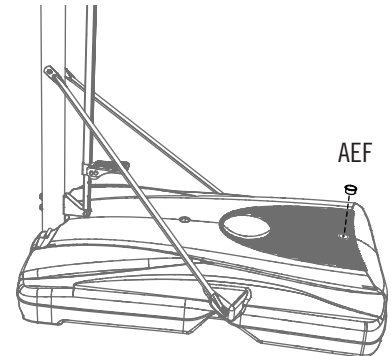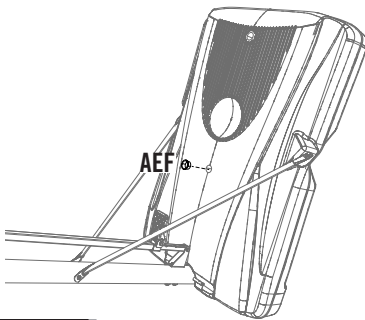




**WARNING**

For safety reasons, we recommend that sand be used instead of water to fill the base. If a leak develops, water could run out unnoticed, allowing the system to fall over, resulting in serious personal injuries, or property damage. If using water, check the base carefully for leaks. If a leak is found, lay the system down on the ground and call Customer Service. Do not use, stand up, or play on a leaking system.

6.3B

• Option B: Filling with water

- Insert a **base plug (AEF)** into the **base (AJM)** in the hole closest to the pole.
- Fill the base with cold water through the hole furthest from the pole until the water is just below the hole.
- Using two adults, stand the base up on a flat surface and finish filling the base with water.
- Add one tablespoon of chlorine bleach to the water to prevent algae formation.
- Insert the other base plug into the hole furthest from the pole.

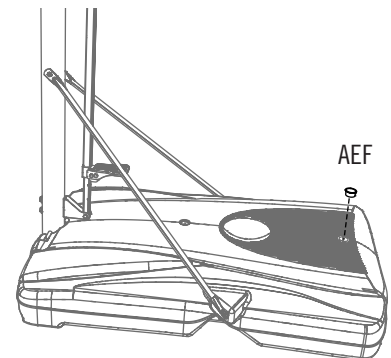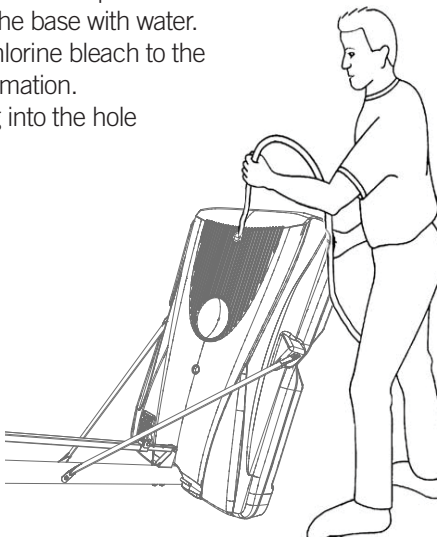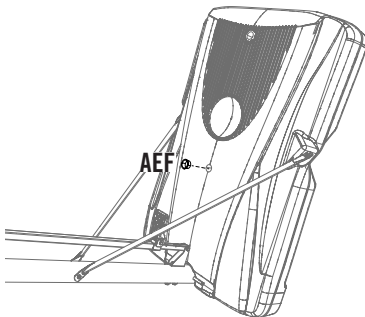


► SECTION 6 (CONTINUED)

TOOLS AND HARDWARE REQUIRED




6.4

- To adjust the height of the system, hold the handle while depressing the foot pedal. Move the handle up or down to the desired height, then release the foot pedal to secure the position.

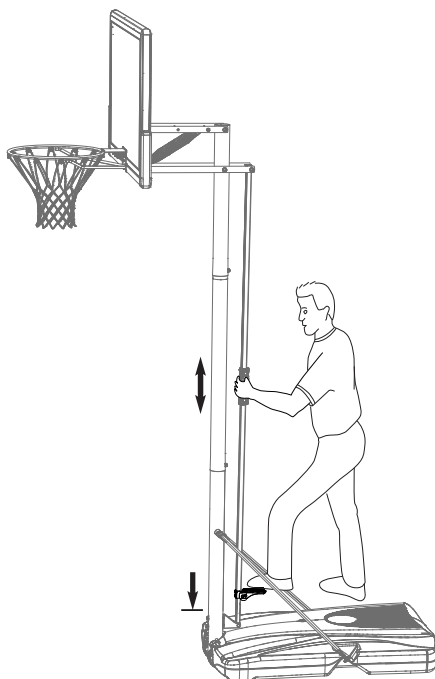

6.5

- To apply the **height sticker (AKP)**, raise the system to the highest setting (10 feet). Line up the 10 foot mark on the sticker with the top of the handle. Remove the backing on the sticker and apply as shown.

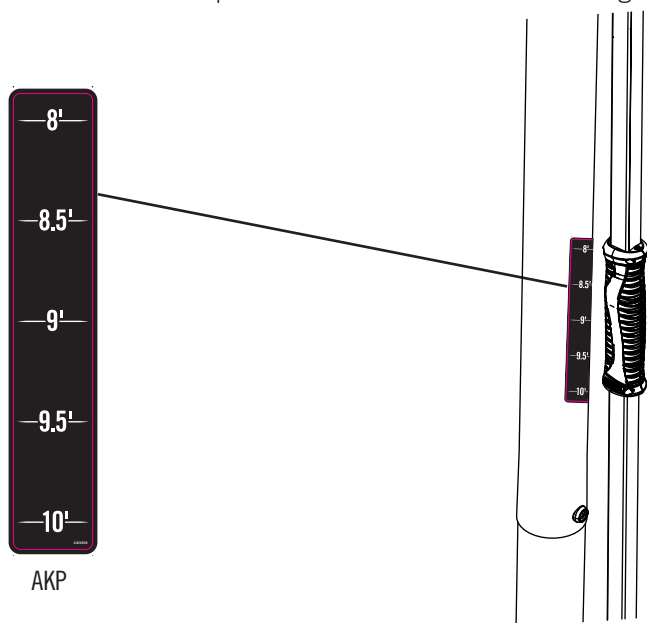


► SECTION 6 (CONTINUED)

TOOLS AND HARDWARE REQUIRED



6.6

- In order to move the system, please to adjust the system to its lowest position, then move it as shown.

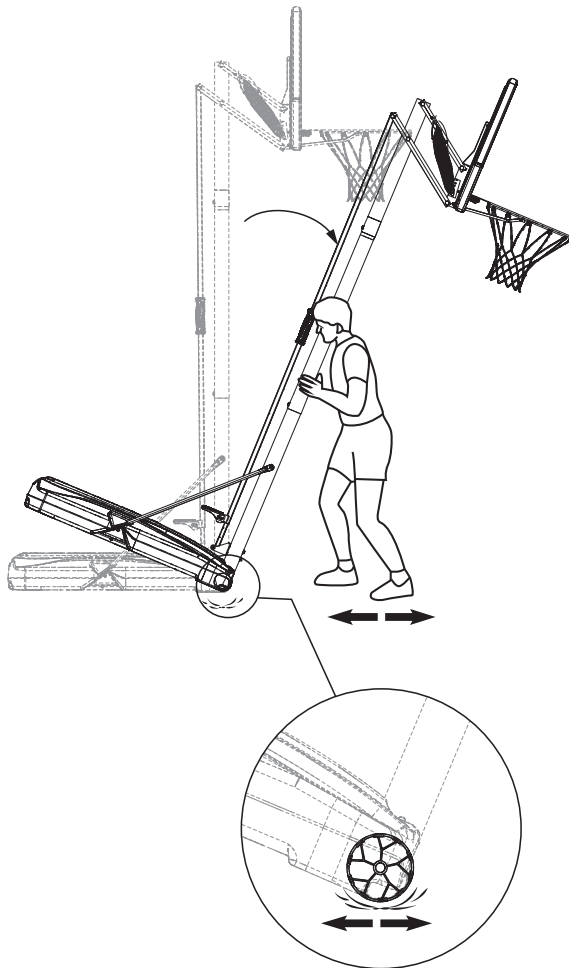

WARNING: The system must only be moved by people capable of handling its weight. Do not allow children to move the system.

- Adjust the system to its lowest position, and use caution to prevent the height mechanism from adjusting.
- Stand in front of the system and pull on the pole until the unit is balanced on its wheels.
- Move the system to the desired location and carefully set the base down.



CAUTION: the system must only be moved on its wheels. Sliding the base may damage the base which could result in leakage and the system tipping over.



MAINTENANCE

The life of your basketball system depends on many variables. The climate, exposure to corrosives such as salt, pesticides, or herbicides, and excessive use or misuse can all contribute to Pole failure, which may cause property damage or personal injury.

Check your basketball system frequently for loose hardware, excessive wear, and signs of corrosion. For safety reasons, and to prolong the life of your basketball system, you must take the following preventive measures.

- a. Check all nuts and bolts. If any are loose, tighten them.
- b. Check all parts for excessive wear and tear. If necessary, replace any parts that have been worn or damaged through usage. Contact our customer service department for replacement parts.
- c. Inspect the warning sticker on the pole. If it is ripped, faded, or illegible, call our customer service department to request a replacement sticker.
- d. Check all pole sections for visible rust or chipped or cracked paint. If either are present, do the following:
 1. Use an emery cloth to completely remove any rust or chipped paint.
 2. Clean the area with a damp cloth and allow it to dry.
 3. Apply two coats of a rust preventative, high gloss enamel paint to the area. Allow the paint to dry between coats.

IF RUST HAS PENETRATED THROUGH THE POLE ANYWHERE, REPLACE IT IMMEDIATELY!



REGISTER YOUR PRODUCT ONLINE AT WWW.LIFETIME.COM

At Lifetime®, we are committed to providing innovative and quality products. While registering, you will have the opportunity to give us your feedback. Your input is valuable to us.

- You can also opt in to receive new product notifications or promotions.
- In the unlikely event of a product recall or safety modification, your registration provides the information we need to notify you directly.
- Registration is fast, easy, and completely voluntary.

LIFETIME'S PROMISE TO YOU:

Maintaining your privacy is our long-standing policy at Lifetime®. And you can rest assured that Lifetime® will not sell or provide your personal data to other third parties, or allow them to use your personal data for their own purposes.

We invite you to read our privacy policy at www.lifetime.com

REGISTER today!



WARNING STICKER / AUTOCOLLANT D'AVERTISSEMENT / ETIQUETA DE ADVERTENCIA



WARNING




FAILURE TO FOLLOW THESE WARNINGS MAY RESULT IN SERIOUS INJURY AND/OR PROPERTY DAMAGE.

Owners must ensure that all players know and follow these rules for safe operation of the system.

- Only hang from the rim briefly to regain balance or avoid injuring others. Release the rim as soon as safely possible.
- During play, especially when performing dunk type activities, keep player's face away from the backboard, rim, and net. Serious injury could occur if teeth/face come in contact with the backboard, rim, or Net. Player should wear a mouth guard during play.
- Do not slide, climb, or play on base or pole.
- Completely fill base according to manufacturer's instructions. Never leave the unit standing in an upright position without first filling the base with weight or the system will tip quickly causing serious personal injury.
- When adjusting height or moving system, keep hands and fingers away from moving parts.
- Do not allow children to move or adjust system.
- Do not wear jewelry (rings, watches, necklaces, etc.) during play. Objects may entangle in net.
- Keep water and organic material away from pole base. Grass, litter, etc. could cause corrosion and/or deterioration.
- Never play on damaged equipment.
- Surface beneath the base must be smooth and free of gravel or other objects. Punctures cause leakage and could cause system to tip over.

- Once a month check pole and all metal parts for signs of corrosion (rust, pitting, chipping). Completely remove rust and repaint with exterior enamel. If rust has penetrated any steel part, replace that part immediately.
- Check system before each use for proper ballast, loose hardware, excessive wear, instability, and signs of corrosion and repair before use.
- Do not use system during windy or severe weather. System may tip over. Place system in an area protected from the wind or in an area away from property that may be damaged if the system falls, and from overhead power lines.
- Do not use the system to lift or hoist anything. The mechanism is designed to lift only the weight of the backboard and rim. Do not hang anything from the handle, rim, backboard, or lifter arms as this will damage the system and void the warranty.



AVERTISSEMENT



ADVERTENCIA



FAUTE DE NE PAS SUIVRE CES AVERTISSEMENTS, VOUS RISQUEZ DE CAUSER DES BLESSURES GRAVES ET/OU DES DOMMAGES À L'ÉQUIPEMENT.

Le propriétaire doit s'assurer que tous les joueurs connaissent et appliquent les règles suivantes afin d'utiliser l'équipement en toute sécurité.

- Ne pas se suspendre à l'anneau plus que nécessaire pour retrouver l'équilibre ou éviter de blesser les autres joueurs. Relâcher l'anneau aussitôt que possible.
- Lors d'un match, particulièrement dans le cas des smashes, le visage du joueur ne doit pas faire face au panneau, à l'anneau, ni au filet. Le joueur risque de graves blessures si ses dents ou son visage entrent en contact avec le panneau, l'anneau, ou le filet. Les joueurs doivent toujours porter un protège-dents lorsqu'ils jouent.
- Ne pas glisser, ne pas grimper, et ne pas jouer sur la base ou le poteau.
- Remplir complètement la base selon les instructions du fabricant. Ne jamais laisser l'unité debout de plein pied sans avoir d'abord rempli la base avec un poids ou l'équipement pourrait basculer rapidement et causer de graves blessures.
- Lors du réglage de la hauteur ou lors du déplacement de l'équipement, garder les mains et doigts loin des pièces mobiles.
- Ne pas permettre aux enfants de déplacer ou d'ajuster l'équipement.
- Ne pas porter de bijoux (bagues, montres, colliers, etc.) pendant le jeu. Ces objets pourraient s'accrocher au filet.
- La surface sur laquelle est posée la base doit être lisse et sans gravier ou tout autre objet qui pourrait troubler la base entraînant ainsi une fuite ce qui pourrait faire basculer l'équipement.
- Garder de l'eau et de la matière organique loin de la base. Le gazon, les déchets, etc. pourraient provoquer la corrosion et/ou la détérioration.
- Une fois par mois, vérifier que le poteau et toutes les pièces en métal ne montrent pas de signes de corrosion (rouille, piqures, écaillage). Enlever toute la rouille et repeindre complètement avec une peinture pour extérieur. Si la rouille a pénétré une des pièces en acier, il faut la remplacer immédiatement la pièce en question.
- Chaque fois avant d'utiliser le système, vérifier d'abord l'équilibre, la possibilité de pièces desserrées ou usées, la stabilité de l'équipement et tout signe de corrosion ou réparation nécessaire avant utilisation.
- Ne jamais jouer avec un équipement endommagé.
- Ne pas utiliser l'équipement lors de fortes rafales de vent ou de mauvais temps. L'équipement pourrait basculer. Placer l'équipement dans un endroit abrité du vent ou loin des structures qu'il pourrait endommager s'il basculait, et loin des fils électriques.
- Ne pas utiliser l'équipement pour lever ou soulever quoique ce soit. Son mécanisme a été conçu uniquement pour soutenir le poids du panneau et de l'anneau. Ne rien accrocher au manche, à l'anneau, au panneau ni aux leviers sous peine d'endommager l'équipement et d'annuler la garantie.

SI NO SE OBEDECEN ESTAS ADVERTENCIAS PUEDEN PRODUCIRSE GRAVES LESIONES Y/O DAÑOS A LA PROPIEDAD.

El propietario del sistema debe asegurarse de que todos los jugadores conozcan y respeten estas reglas para que el sistema se use en forma segura.

- Colgarse del aro sólo en forma breve, para recuperar el equilibrio o evitar lesionar a otros jugadores. Soltarse del aro lo más pronto que pueda hacerlo con seguridad.
- Durante el juego, especialmente al embocar violentamente de alto, la cara de los jugadores debe mantenerse alejada del tablero, el aro y la red. Pueden producirse lesiones graves si los dientes o la cara entran en contacto con el tablero, el aro o la red. Los jugadores deben usar un protector bucal durante el juego.
- No deslizarse, no trepar ni jugar sobre la base o el poste.
- Llenar la base completamente siguiendo las instrucciones del fabricante. Nunca dejar la unidad en posición de uso sin haber llenado previamente la base con material de contrapeso, pues el sistema podría tumbarse rápidamente y causar graves lesiones personales.
- Mantener las manos y los dedos alejados de las piezas móviles al regular la altura o al desplazar el sistema.
- No dejar que los niños regulen ni desplacen el sistema.
- No usar joyas (anillos, relojes, collares o gargantillas, etc.) durante el juego. Estos objetos pueden engancharse en la red.
- La superficie donde se coloque la base debe estar lisa y desprovista de piedras, grava u otros objetos. Las perforaciones pueden originar pérdidas, y éstas pueden hacer que el sistema se tumbe.
- Guardar agua y materia orgánica. Césped, basura, etc., podrían causar corrosión et/o deterioros.
- Controlar el poste y todas las piezas metálicas una vez al mes en busca de signos visibles de corrosión (oxidación, picaduras, escamado). Eliminar todo rastro de óxido y volver a pintar con esmalte para exteriores. Si el óxido ha penetrado cualquier pieza de acero, reemplazar esa pieza de inmediato.
- Inspeccionar el sistema antes de cada uso para verificar que esté adecuadamente contrapesado, que los elementos de fijación no estén flojos, que no haya desgaste excesivo, inestabilidad ni signos de corrosión. Al encontrar irregularidades, repararlas antes de usar el sistema. Nunca jugar con un equipo dañado.
- No usar el sistema en presencia de vientos fuertes o condiciones climáticas adversas, ya que puede tumbarse. Colocar la unidad en una posición de almacenamiento y/o en una zona a resguardo del viento, lejos de propiedades personales que puedan dañarse si el sistema se cae, y de líneas de suministro de energía.
- No usar el sistema para levantar ningún objeto. El mecanismo está diseñado para elevar solamente el peso del tablero con el aro. No colgar nada de la agarradera, el aro, el tablero ni los brazos de elevación, ya que esto puede dañar el sistema y anular la garantía.

www.lifetime.com

Lifetime Products, Inc., Clearfield, UT 84016

1-800-225-3865

11/23/2015



NOTES



NOTES



NOTES



5-YEAR LIMITED FACTORY WARRANTY

THE MANUFACTURER RESERVES THE RIGHT TO MAKE SUBSTITUTIONS TO WARRANTY CLAIMS IF PARTS ARE UNAVAILABLE OR OBSOLETE.

1. Lifetime basketball systems are warranted to the original purchaser to be free from defects in material or workmanship for a period of five years (60 months) from the date of original retail purchase. The word “defects” is defined as imperfections that impair the use of the product. Defects resulting from misuse, abuse or negligence will void this warranty. This warranty does not cover defects due to improper installation, alteration or accident. This warranty does not cover damage caused by vandalism, rusting, “acts of nature” or any other event beyond the control of the manufacturer.
2. This warranty is nontransferable and is expressly limited to the repair or replacement of defective product. If the product is defective within the terms of this warranty, Lifetime Products, Inc. will repair or replace defective parts at no cost to the purchaser. Shipping charges to and from the factory or distribution center are not covered and are the responsibility of the purchaser. Labor charges and related expenses for removal, installation or replacement of the product or its components are not covered under this warranty.
3. This warranty does not cover scratching or scuffing of the product that may result from normal usage. In addition, defects resulting from intentional damage, negligence, unreasonable use or hanging from the rim will void this warranty.
4. Liability for incidental or consequential damages is excluded to the extent permitted by law. While every attempt is made to embody the highest degree of safety in all equipment, freedom from injury cannot be guaranteed. The user assumes all risk of injury resulting from the use of this product. All merchandise is sold on this condition, and no representative of the company may waive or change this policy.
5. This product is not intended for institutional or commercial use; Lifetime Products, Inc. does not assume any liability for such use. Institutional or commercial use will void the warranty.
6. Our goods come with guarantees that cannot be excluded under the Australian Consumer Law. You are entitled to a replacement or refund for a major failure and for compensation for any other reasonably foreseeable loss or damage. You are also entitled to have the goods repaired or replaced if the goods fail to be of acceptable quality and the failure does not amount to a major failure.
7. This warranty is expressly in lieu of all other warranties, expressed or implied, including warranties of merchantability or fitness for use to extent permitted by Federal and state law. Neither Lifetime Products, Inc., nor any representative assumes any other liability in connection with this product. This warranty gives you specific legal rights, and you may also have other rights which vary from state to state.

PLEASE INCLUDE YOUR DATED SALES RECEIPT AND PHOTOGRAPHS OF DAMAGED PARTS.

REPORT PRODUCT DEFECTS IN WRITING TO:

Lifetime Products, Inc., PO Box 160010 Clearfield, UT 84016-0010 or dial 1-800-225-3865.

REGISTER YOUR PRODUCT FOR QUICKER CUSTOMER SERVICE.

Visit www.lifetime.com or dial 1-800-225-3865 to register your product today.

FOR INTERNATIONAL WARRANTY CLAIMS:

All warranty claims must be accompanied by a sales receipt. Report all warranty claims in writing to your regional sales support representative. Please include your dated sales receipt and photographs of damaged parts.

To Identify the representative for your region, please visit: www.lifetime.com/international



www.lifetime.com

ENHANCE YOUR LIFETIME® PURCHASE BY ADDING ACCESSORIES OR OTHER GREAT PRODUCTS

To purchase accessories or other Lifetime® products, visit us at:

www.lifetime.com
Or dial 1-800-424-3865



www.lifetime.com

