



Assembly Instructions




CAUTION

- Inspect the wire insulation for any cuts, abrasions, or exposed copper that may have resulted during shipping. If there is a defect in the wire, do not attempt installation.
- Before starting installation of this fixture or removal of a previous fixture, disconnect the power by turning off the circuit breaker or by removing the fuse at the fuse box.

TOOLS REQUIRED

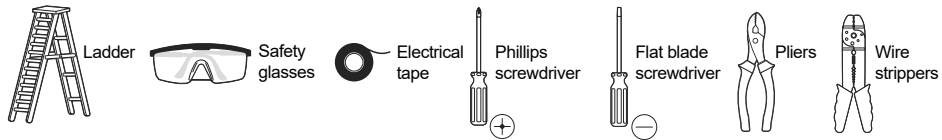

Fixture*1



Shade*1



Short Rod*2



Long Rod*2



Loop*1



Mounting Unit*1



Mounting Screw*2



Wire Nut*3



Cap Nut*2



Canopy (w/ quick connector)*1



Set Screw*4

*PARTS SHOWN MAY DIFFER SLIGHTLY PER LIGHT FIXTURE

Assembly Instructions

STEP 1


Use the mounting screws to attach the mounting unit to the junction box.



STEP 2

Unsecure the preinstalled set screws from the metal ring on the fixture, then secure the shades to the fixture using the set screws.

Screw the short rods to the top of the fixture. Then screw in the long rods and the loop. Make sure to feed the branch wires through the rods during assembly (As below right image shown).

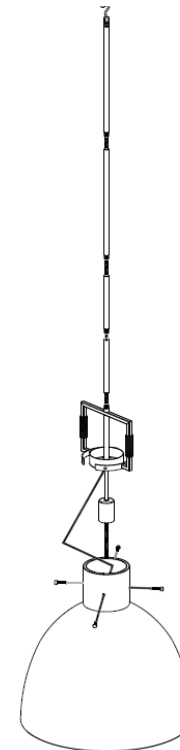

STEP 3



Make the electrical connection from the junction box to the fixture. Connect the ground wire to the mounting unit, using the preinstalled green ground screw. Then, connect the positive, negative and ground wires with the supplied wire nuts. Secure with electrical tape.

Connect Clear, Brown, Gold or Black Parallel Wire without tracer (round & smooth) or Black Fixture Wire to:

Black or Red Supply Wire or Insulated Wire (other than green) with copper conductor.

Connect Clear, Brown, Gold or Black *Parallel Wire with tracer (square & ridged) or White Fixture Wire to:

White Supply Wire or Insulated Wire (other than green) with silver conductor



STEP 4

Secure the canopy (w/ quick connector) to the loop on the long rod. Place the fixture over the mounting unit and secure with the cap nuts. Install E26*1*60W bulb (not included).

