

GENERAL

Good quality sink formed of #20 gauge, type 304 (18-8) nickel bearing stainless steel. Top mount.

DESIGN FEATURES

Bowl Depth: See table below.

Coved Corners: Vertical 2-1/4"(57mm) or 2-3/4"(70mm) CR1721

Horizontal 3"(76mm) or 3-1/2"(89mm) CR3122, CRS3322

Rim Height: 1/4"(6mm) CR2522, CRS3322, 5/32"(4mm) all others. Finish: Exposed surfaces are polished to Brushed Satin finish. Underside: Fully undercoated to dampen sound and reduce condensation.

OTHER

Drain Opening: 3-1/2" (89mm).

Sink complies with ASME A112.19.3-2008 / CSA B45.4-08.




These sinks are listed by the International Association of Plumbing and Mechanical Officials as meeting the requirements of the Uniform Plumbing Code and the National Plumbing Code of Canada.

SINK DIMENSIONS*

	Overall		Inside Bowl			Cutout in Countertop (1-1/2"(38mm)		No. of 1 ¹ / ₂ " (38mm) Dia. Faucet Holes	Minimum
Model Number	L W		L W		D	Radius Corners)		4" (102mm)	Cabinet Size
	Α	В	С	D	Е	L	W	Center '	
CR1721	17 (432mm	21-1/4) (540mm)	14 (356mm)	15-3/4 (400mm)	6-7/8 (175mm)	16-3/8 (416mm)	20-5/8 (524mm)	1, 2, 3, MR2	21
CR2521	25 (635mm	21-1/4) (540mm)	21 (533mm)	15-3/4 (400mm)	6-7/8 (175mm)	24-3/8 (619mm)	20-5/8 (524mm)	1, 2, 3, 4, MR2	30
CR2522	25 (635mm	22) (559mm)	21 (533mm)	15-3/4 (400mm)	7 (178mm)	24-3/8 (619mm)	21-3/8 (543mm)	1, 2, 3, 4, 5, MR2	30
CR3122	31 (787mm	22) (559mm)	28 (711mm)	15-3/4 (400mm)	6-7/8 (175mm)	30-3/8 (772mm)	21-3/8 (543mm)	1, 2, 3, 4, 5, MR2	36
CRS3322	33 (838mm	22) (559mm)	28 (711mm)	15-3/4 (400mm)	7 (178mm)	32-3/8 (822mm)	21-3/8 (543mm)	1, 2, 3, 4, 5, MR2	36

^{*}Length is left to right. Width is front to back.


Model CR25214



OPTIONAL ACCESSORIES


Model Number	Bottom Grid	Cutting Boards	Drain	Rinsing Basket	Utensil Caddy for Rinsing Basket
CR1721	LKWBG1414SS	CB1516	LK99	LKWERBSS	LKWUCSS
CR2521, CR2522 CR3122, CRS3322	-	CB1516	LK99	LKWERBSS	LKWUCSS

Installation Profile



Hole Drilling Configurations

1-1/2" (38mm) Diameter Faucet Holes on 4" (102mm) Centers

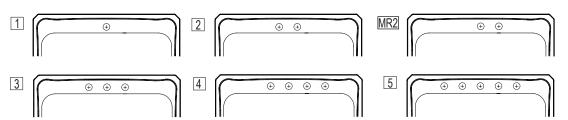



In keeping with our policy of continuing product improvement, Elkayreserves the right to change product specifications without notice.

This specification describes an Elkay product with design, quality and functional benefits to the user. When making a comparison of other producers' offerings, be certain these features are not overlooked.