

Matters Needing Attention

1. Installation must conform to local codes
2. Turn off the water supply before installation
3. Check the product if it is damaged or broken before installation
4. The actual size of the opening should be based on the actual measurement results of the product
5. For best results, strongly recommends that the solid surface countertop cut-out should only be prepared by a professional fabricator, and the sinks should only be installed by a professional installer



Sink may have sharp edges, please be caution and use gloves when handling and installation.


Installation Instructions

Recommended sink under mounting specifications A and C

Flush fit installation is NOT recommended.

Exposure of silicone joint is not considered aesthetically acceptable.

Precise match of sink and countertop cut-out is extremely difficult.

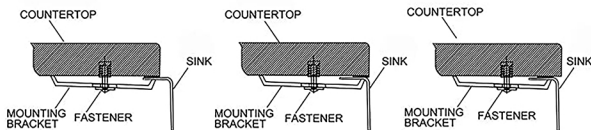


SPECIFICATION A:
1/4" REVEAL

SPECIFICATION B:
FLUSH FIT

SPECIFICATION C:
1/8" OVERHANG



Reverse the sink to trace the outline and measure the size of opening (based on the mounting specifications)



Install the soap dispenser



Install the faucet



Connect the cold water pipe and hot water pipe to the faucet



Install the down strainer



Apply silicone sealant to the overflow pipe and attach the sealing ring



Apply silicone sealant to the sealing ring



Attach the overflow pipe to the overflow hole of the sink



Fix the overflow pipe and the sink with screw



Seal the gap between top and sink with silicone sealant (Drop-in Mounting)



Add the sealing ring to the down pipe



Connect the downpipe to the strainer, and tighten it



Connect the second downpipe (Double bowl sink)



Connect overflow pipe to the downpipe



Connect the downpipe to the drain

Any question, please don't hesitate to contact us. Thank you for your purchase.