


On the back of the plaque is a pre-drilled slot with two circular openings.

Place a wide head nail or screw in the wall,
then place one of the openings over it.



Then simply use the slot to move and
center the plaque.

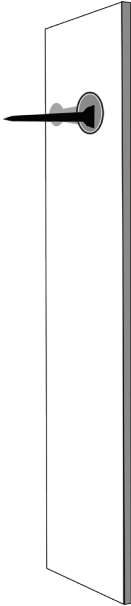