


Shower Door Installation Instruction

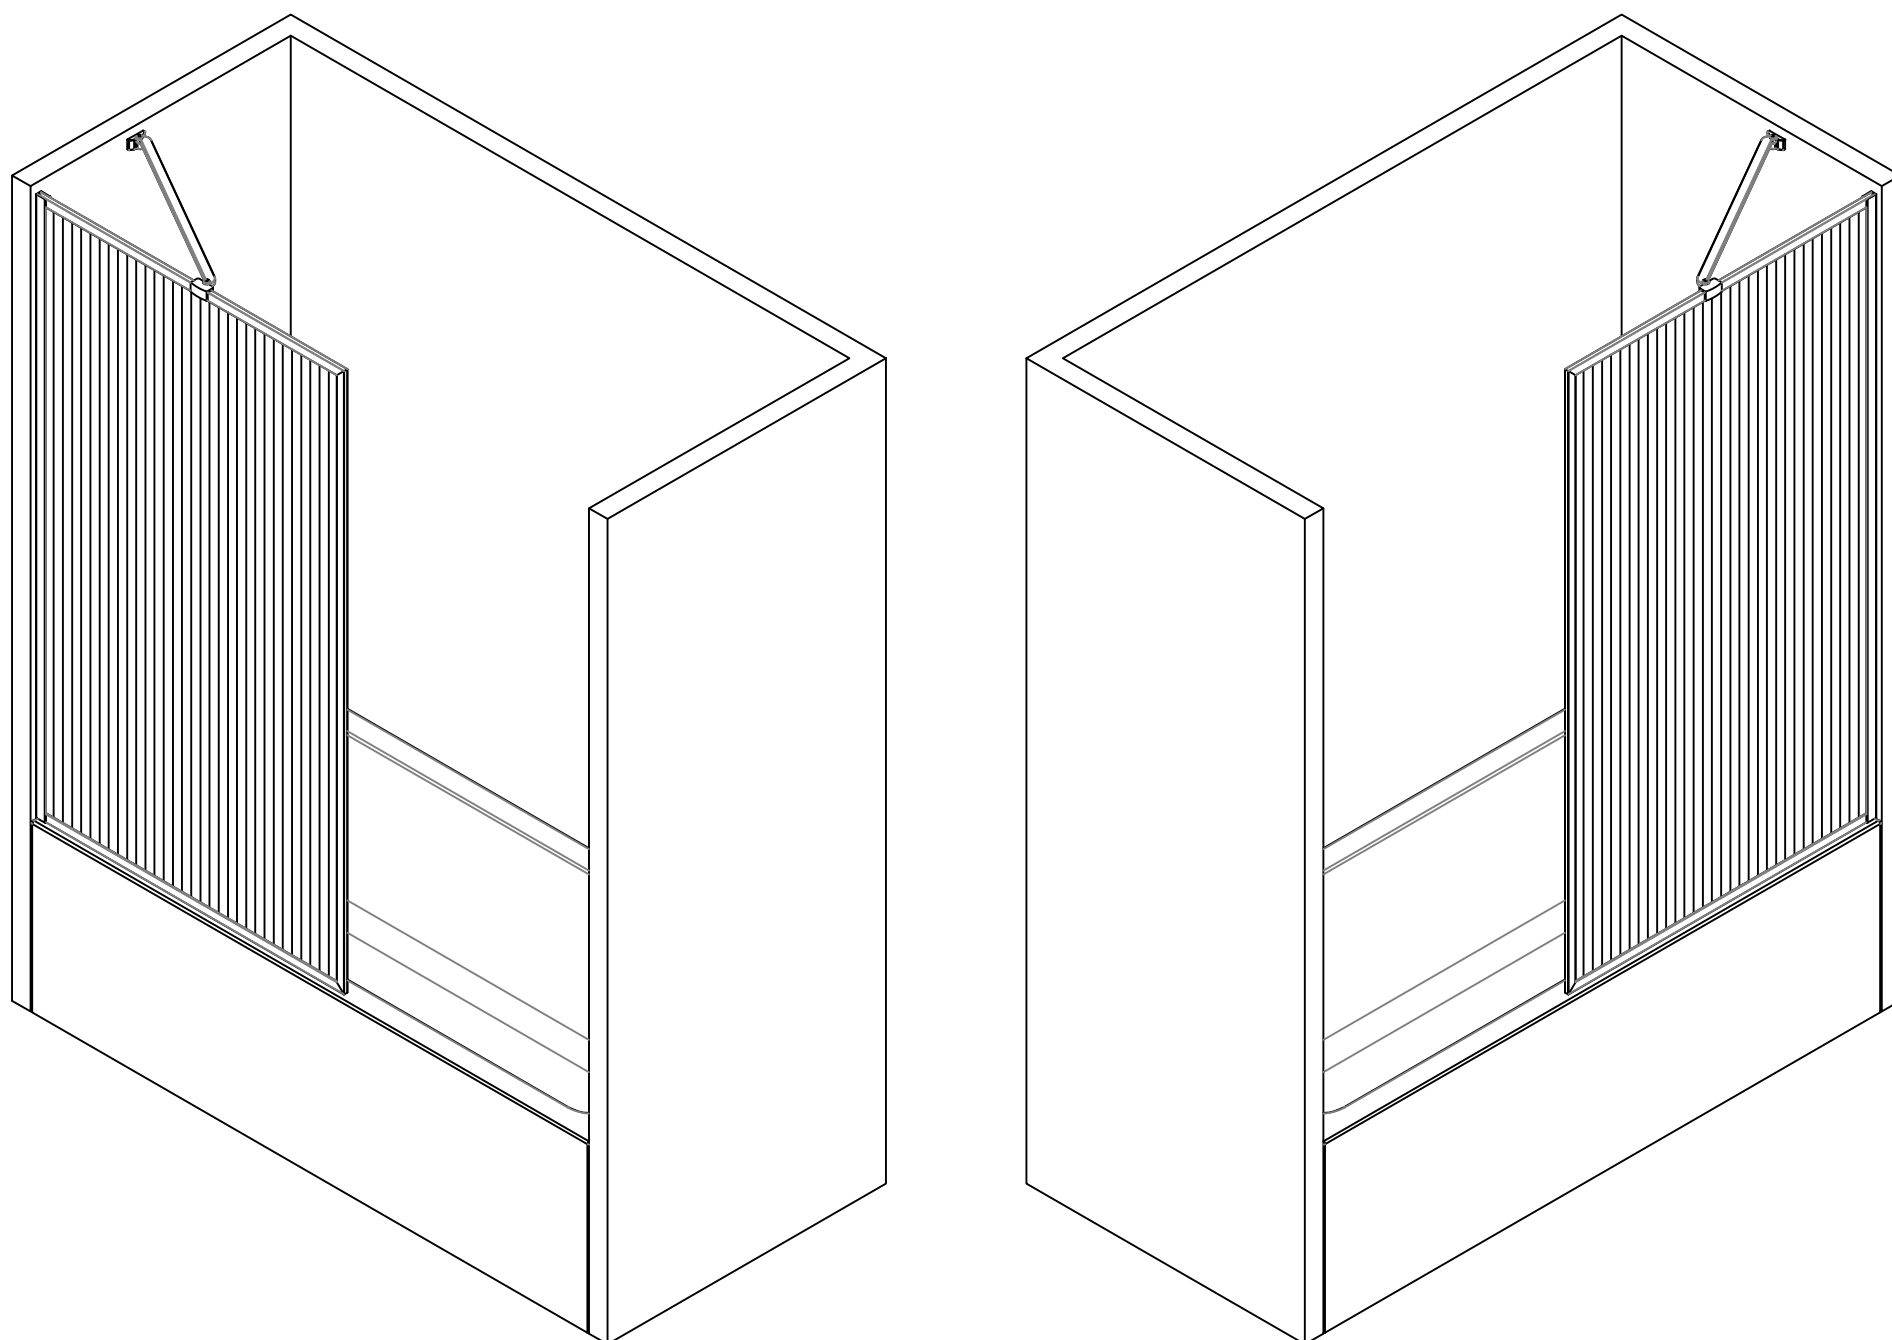


Reversible for a left or right door installation.

**Please do not return the product to the store.
Contact us with any questions.**


Model Specific Preparation




REQUIRED:

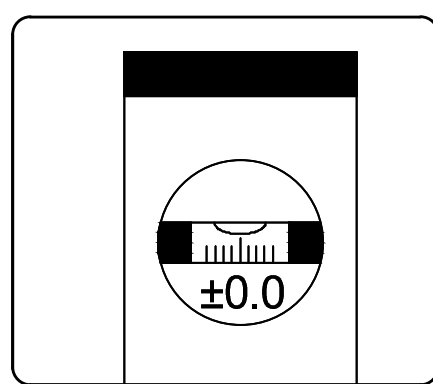


3/8" (10mm)
Out-of-Plumb
Adjustment within
the Wall Profile;
Verify threshold and
walls with a level.

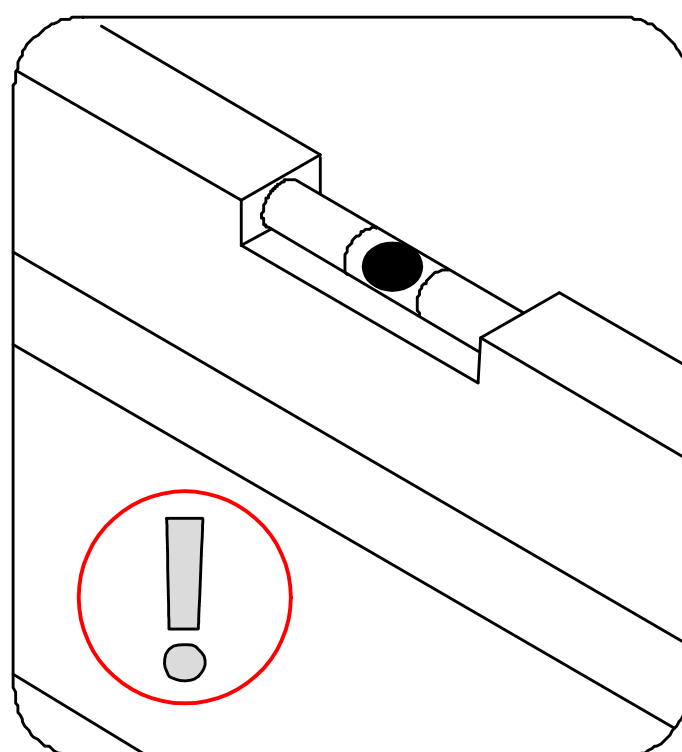

Threshold must be level

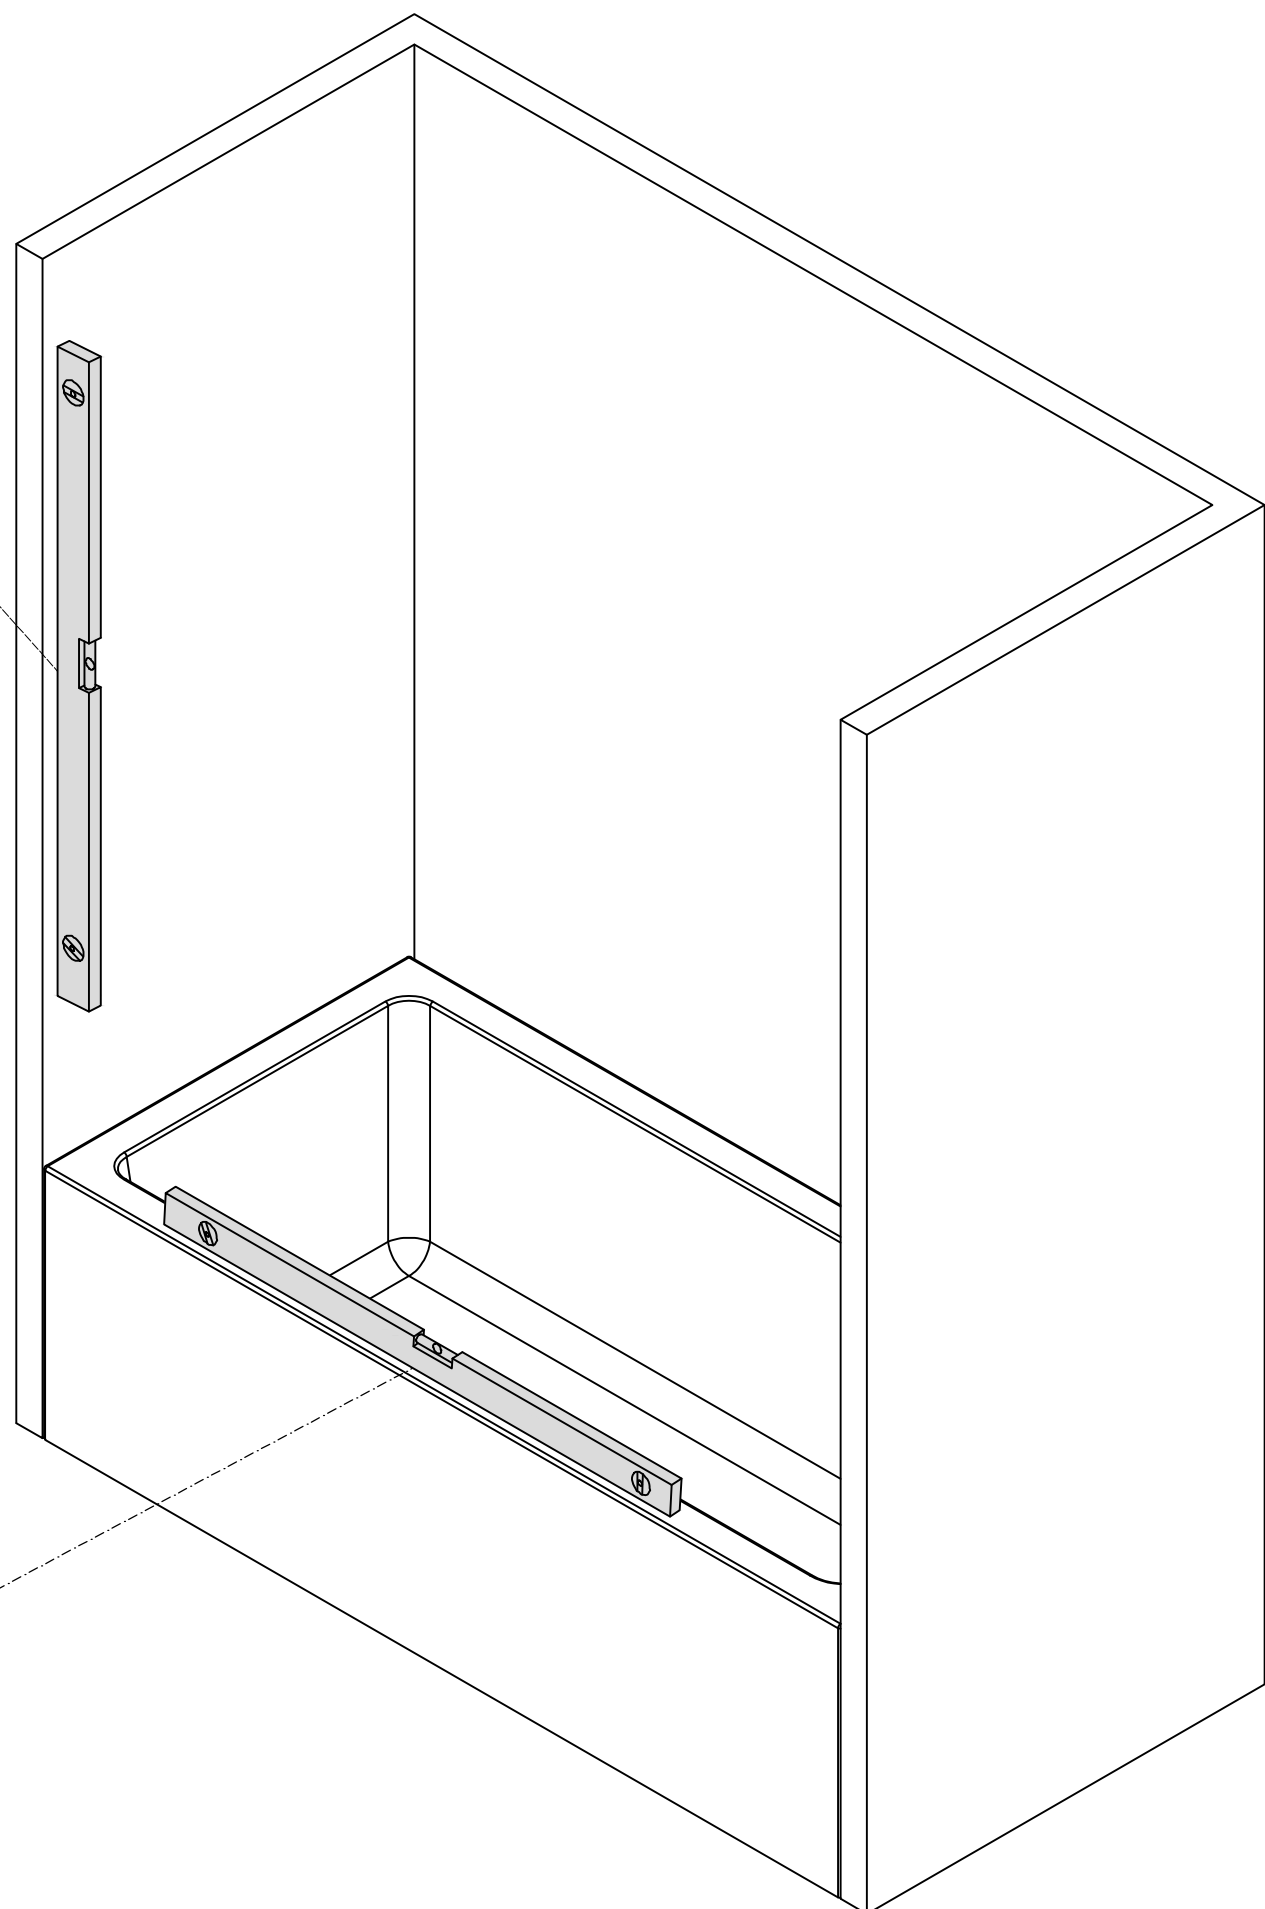

PACKAGE CONTENT

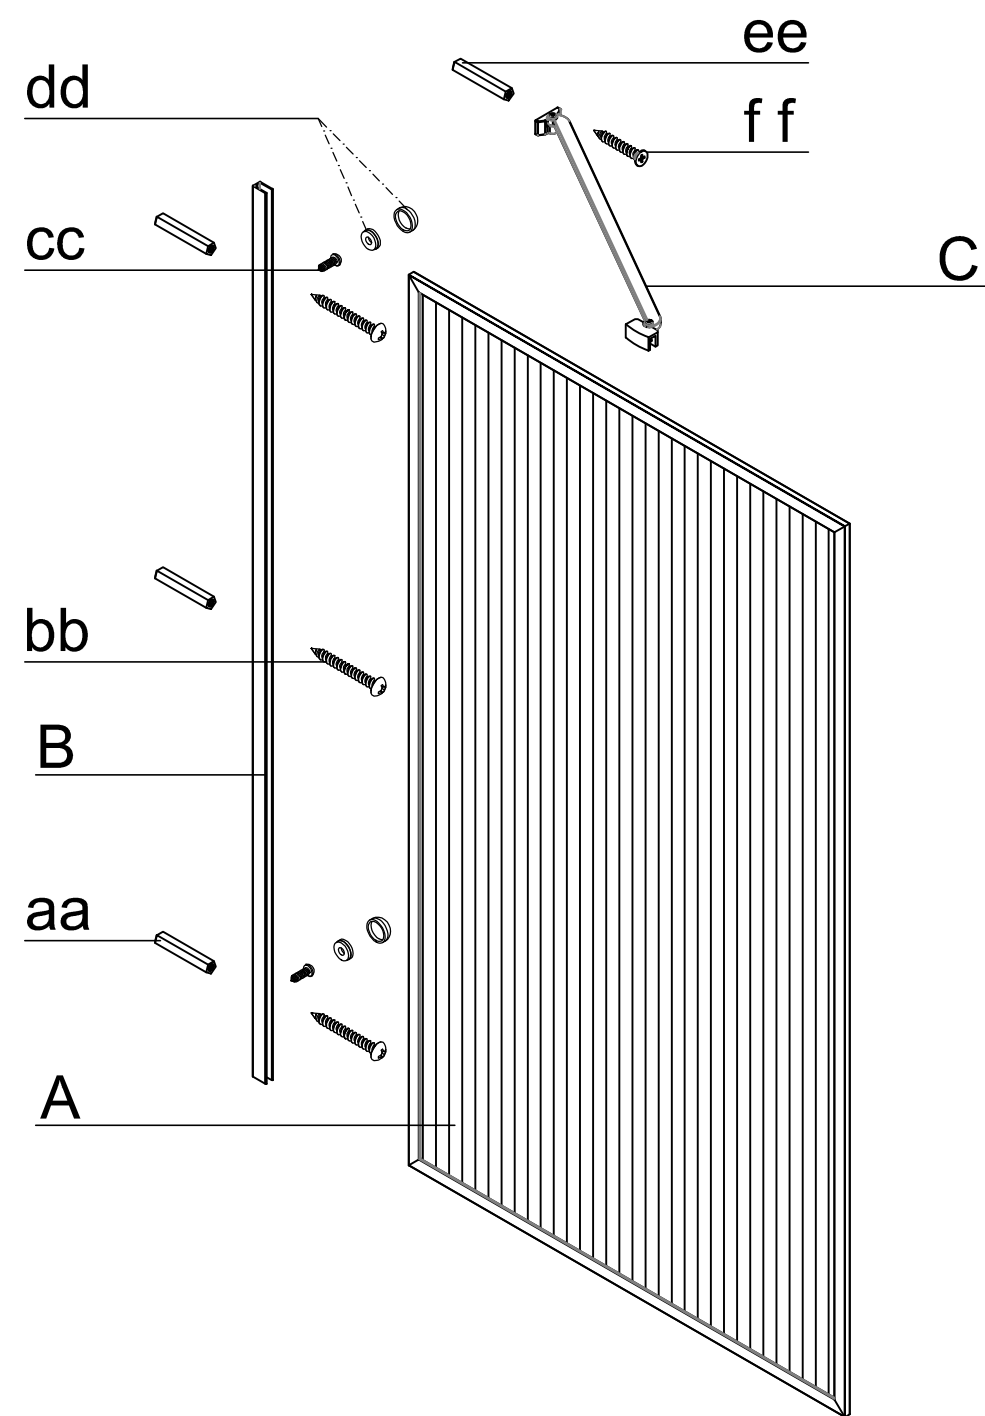


PACKAGE CONTENT

PART#	DESCRIPTION	QTY
A	Stationary Glass	1
B	Wall jamb	1
C	Top bar	1



NOTE

Inspect all parts for missing prior to installation!
Contact us for any part missing.

PACKAGE CONTENT

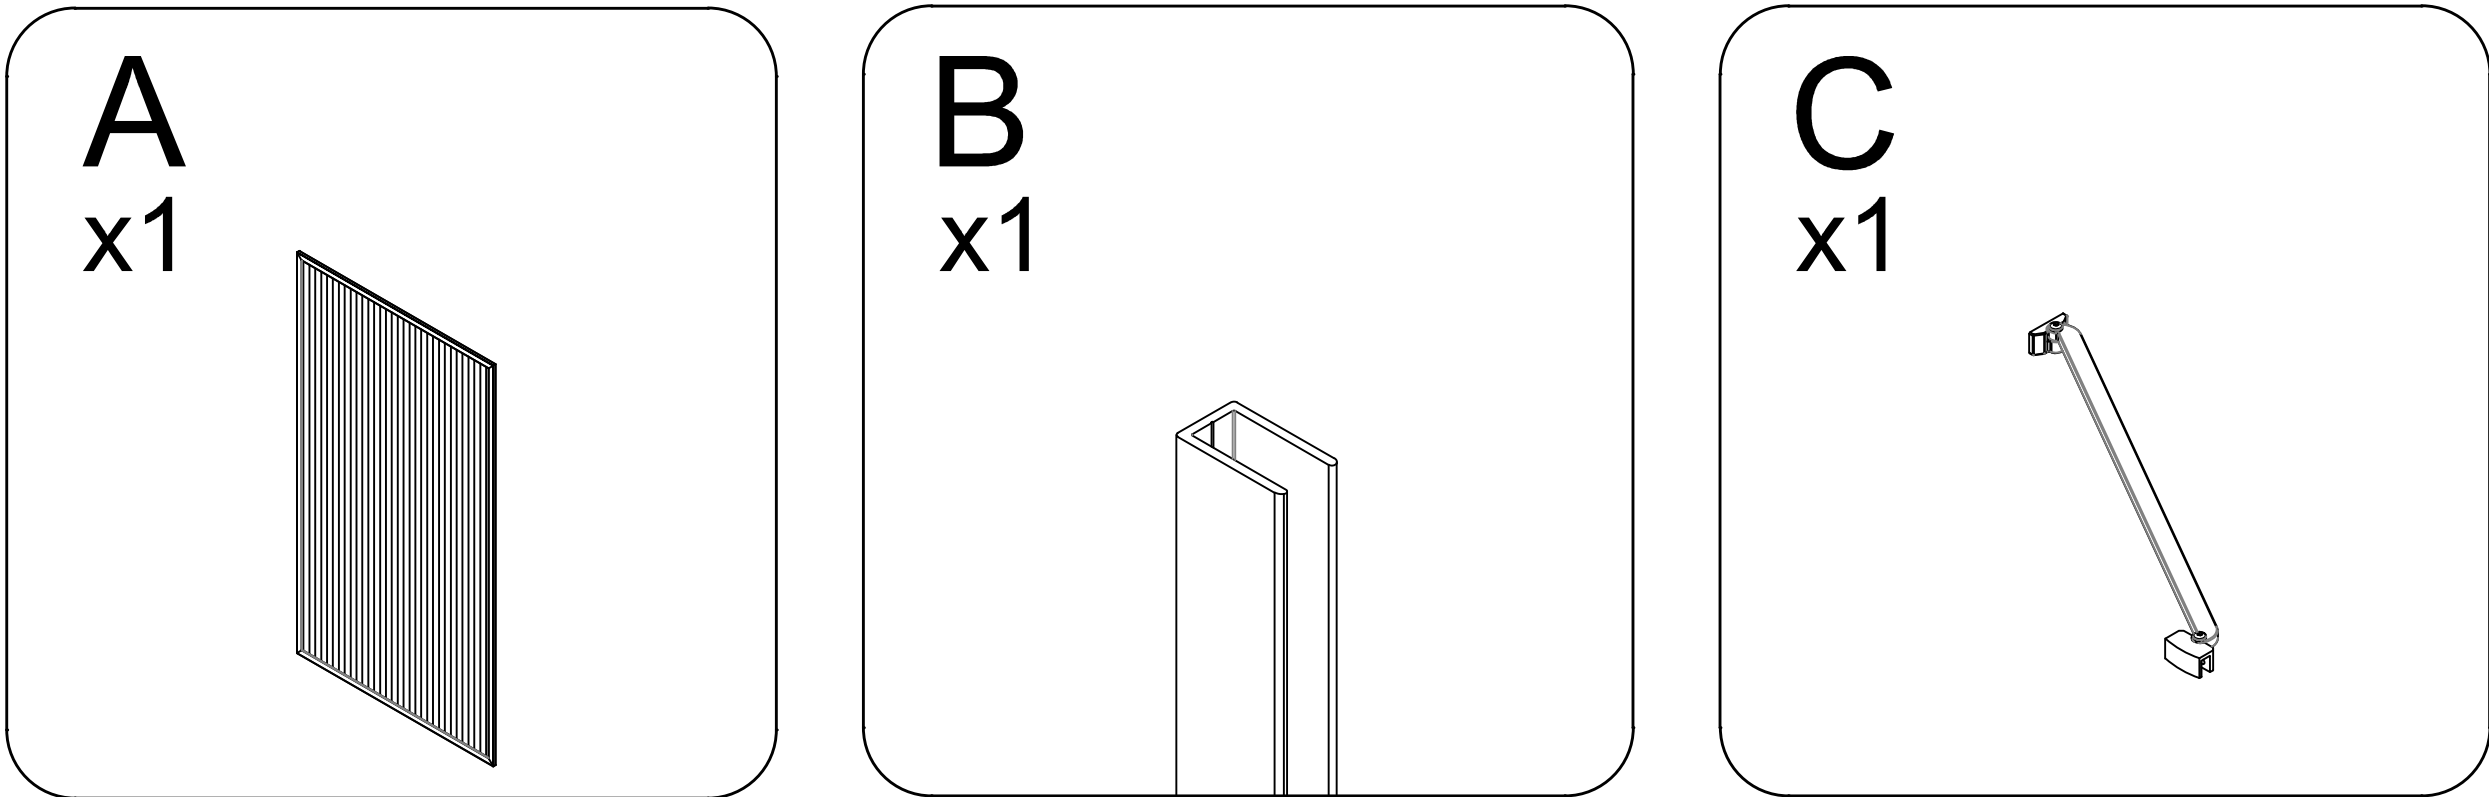













HARDWARE CONTENT

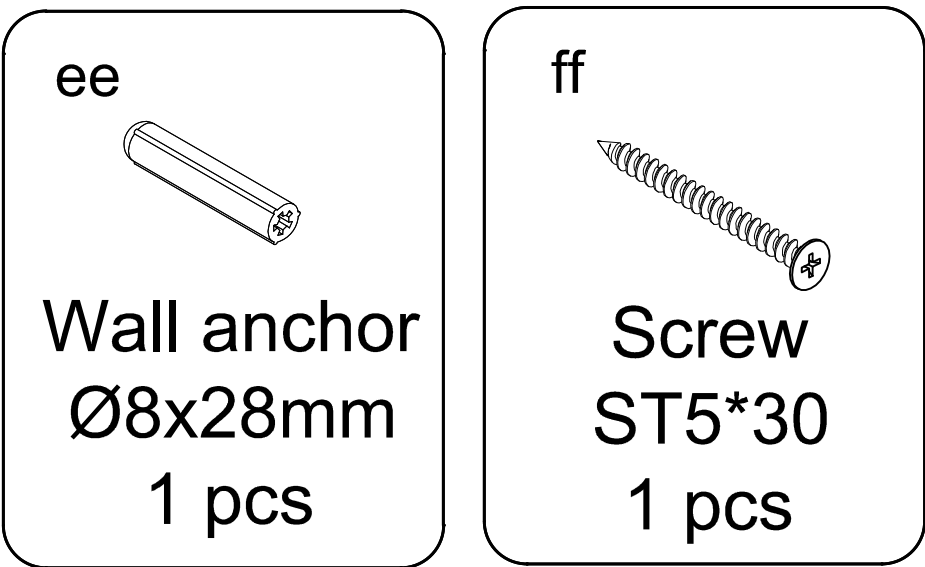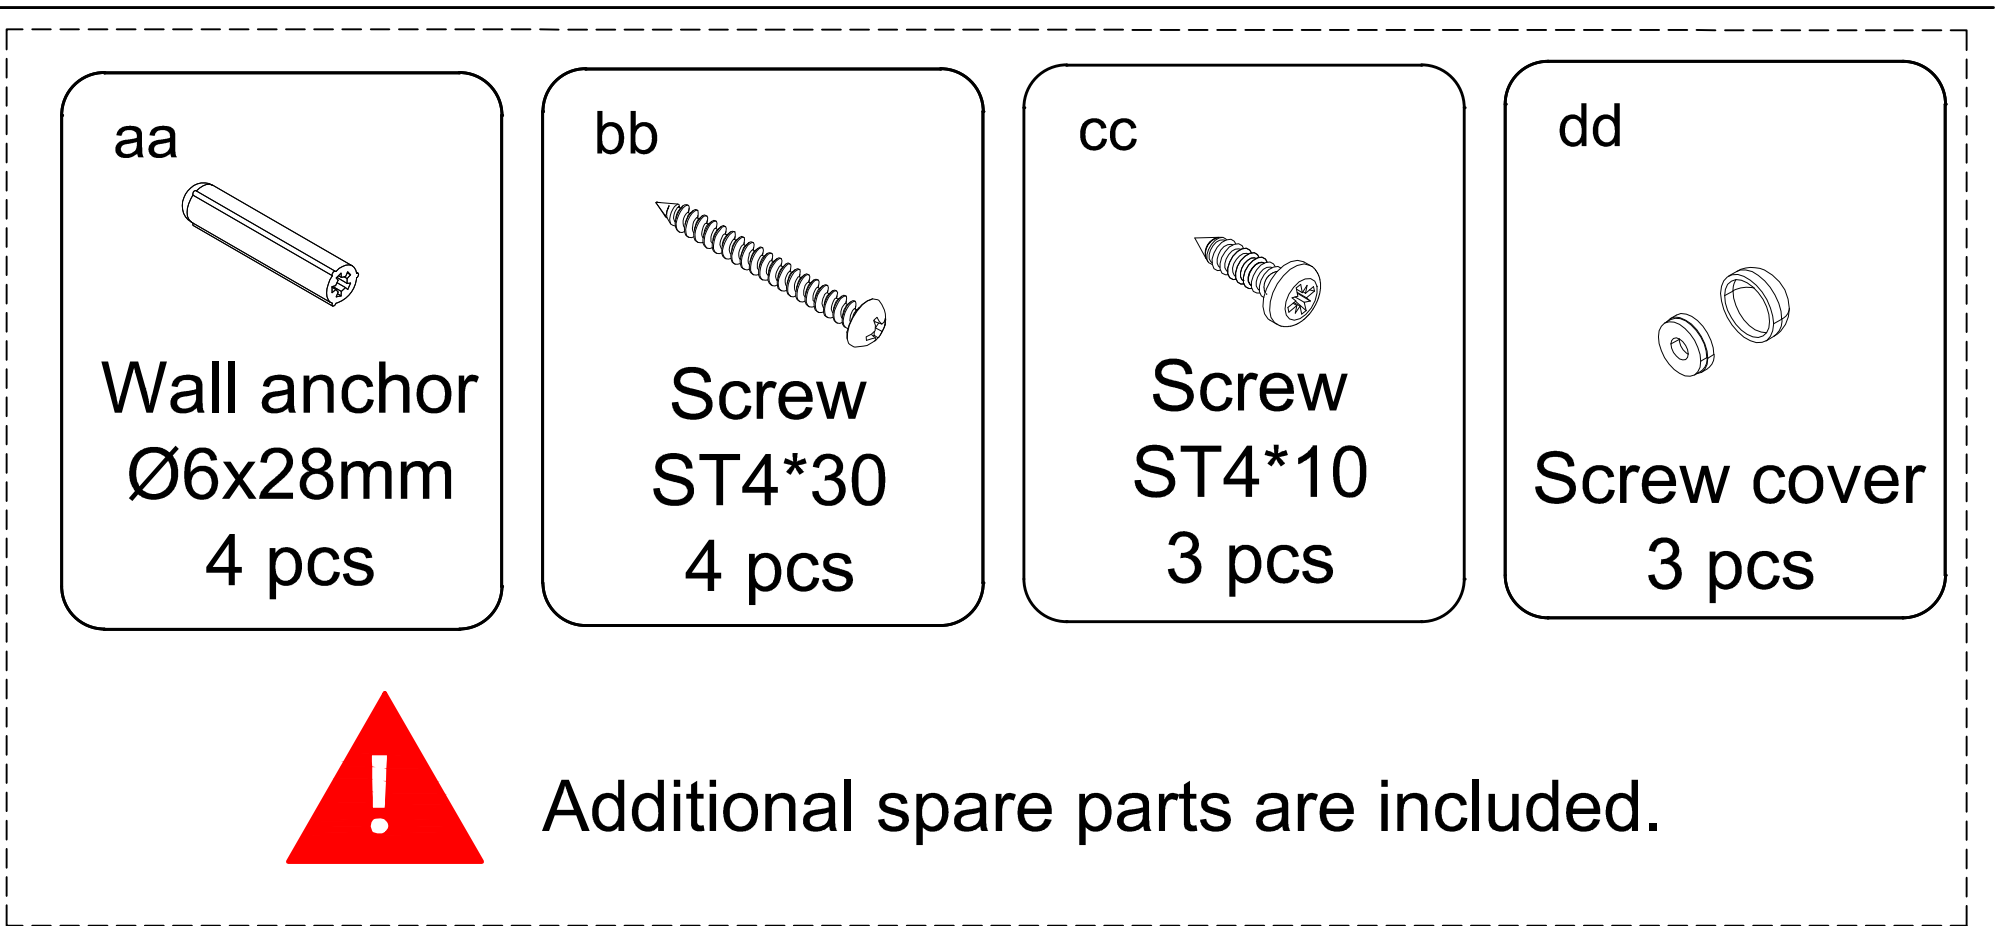

NOTE

Inspect all parts for missing prior to installation!
Contact us for any part missing.

TOOLS REQUIRED

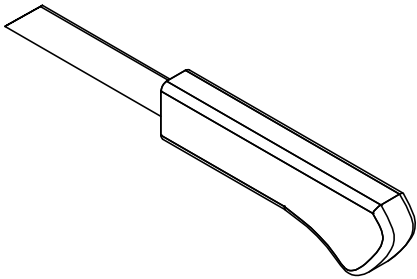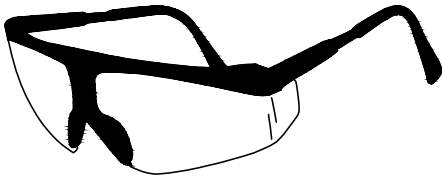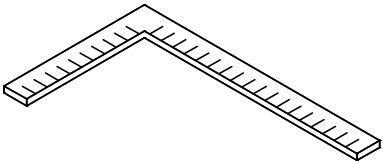Drill Bits  Ø1/4" (6mm) dia. HSS	Screw Driver 	Drill 	Level 
Silicone 	Measuring Tape 	Soft Head Hammer 	Pencil 
Knife 	Sealant 	MASONRY DRILL BIT FOR TILE Ø6mm 	Safety Glasses 
Glove 	Carpenter's Squarer 		

SAFETY INFORMATION


CAUTION

Please carefully read the following important safety information before handling or installing this shower. There is a risk of serious injury while handling this product.


To minimize these risks, please note:

- Always wear safety glasses and gloves while handling.
- Always follow the installation instructions.
- Inspect glass for damage before installation.
- Extreme caution should be taken while handling the glass during installation as the tempered glass may shatter if in contact with a hard surface.
- Do not cut or modify the tempered glass as it will shatter if cut.
- Carefully remove product from packaging and keep packaging until installation is complete, and make sure that everything works satisfactorily.
- Inspect all parts for damage or missing; if there is damage or part missing to the unit prior to installation, please contact customer service at the number provided in this guide.
- Cover the drain with tape to prevent the loss of small parts.
- The shower base and finished walls should be installed before beginning the shower door installation.
- During the installation, protect the shower floor with a drop cloth to avoid damage.
- This product should be installed by two people who are familiar with construction requirements. Professional installation is recommended!
- Keep this installation manual for future reference.

NOTE: Two people should perform this installation.

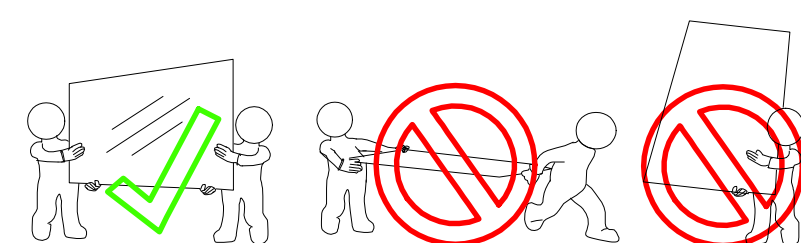

Model Dimensions

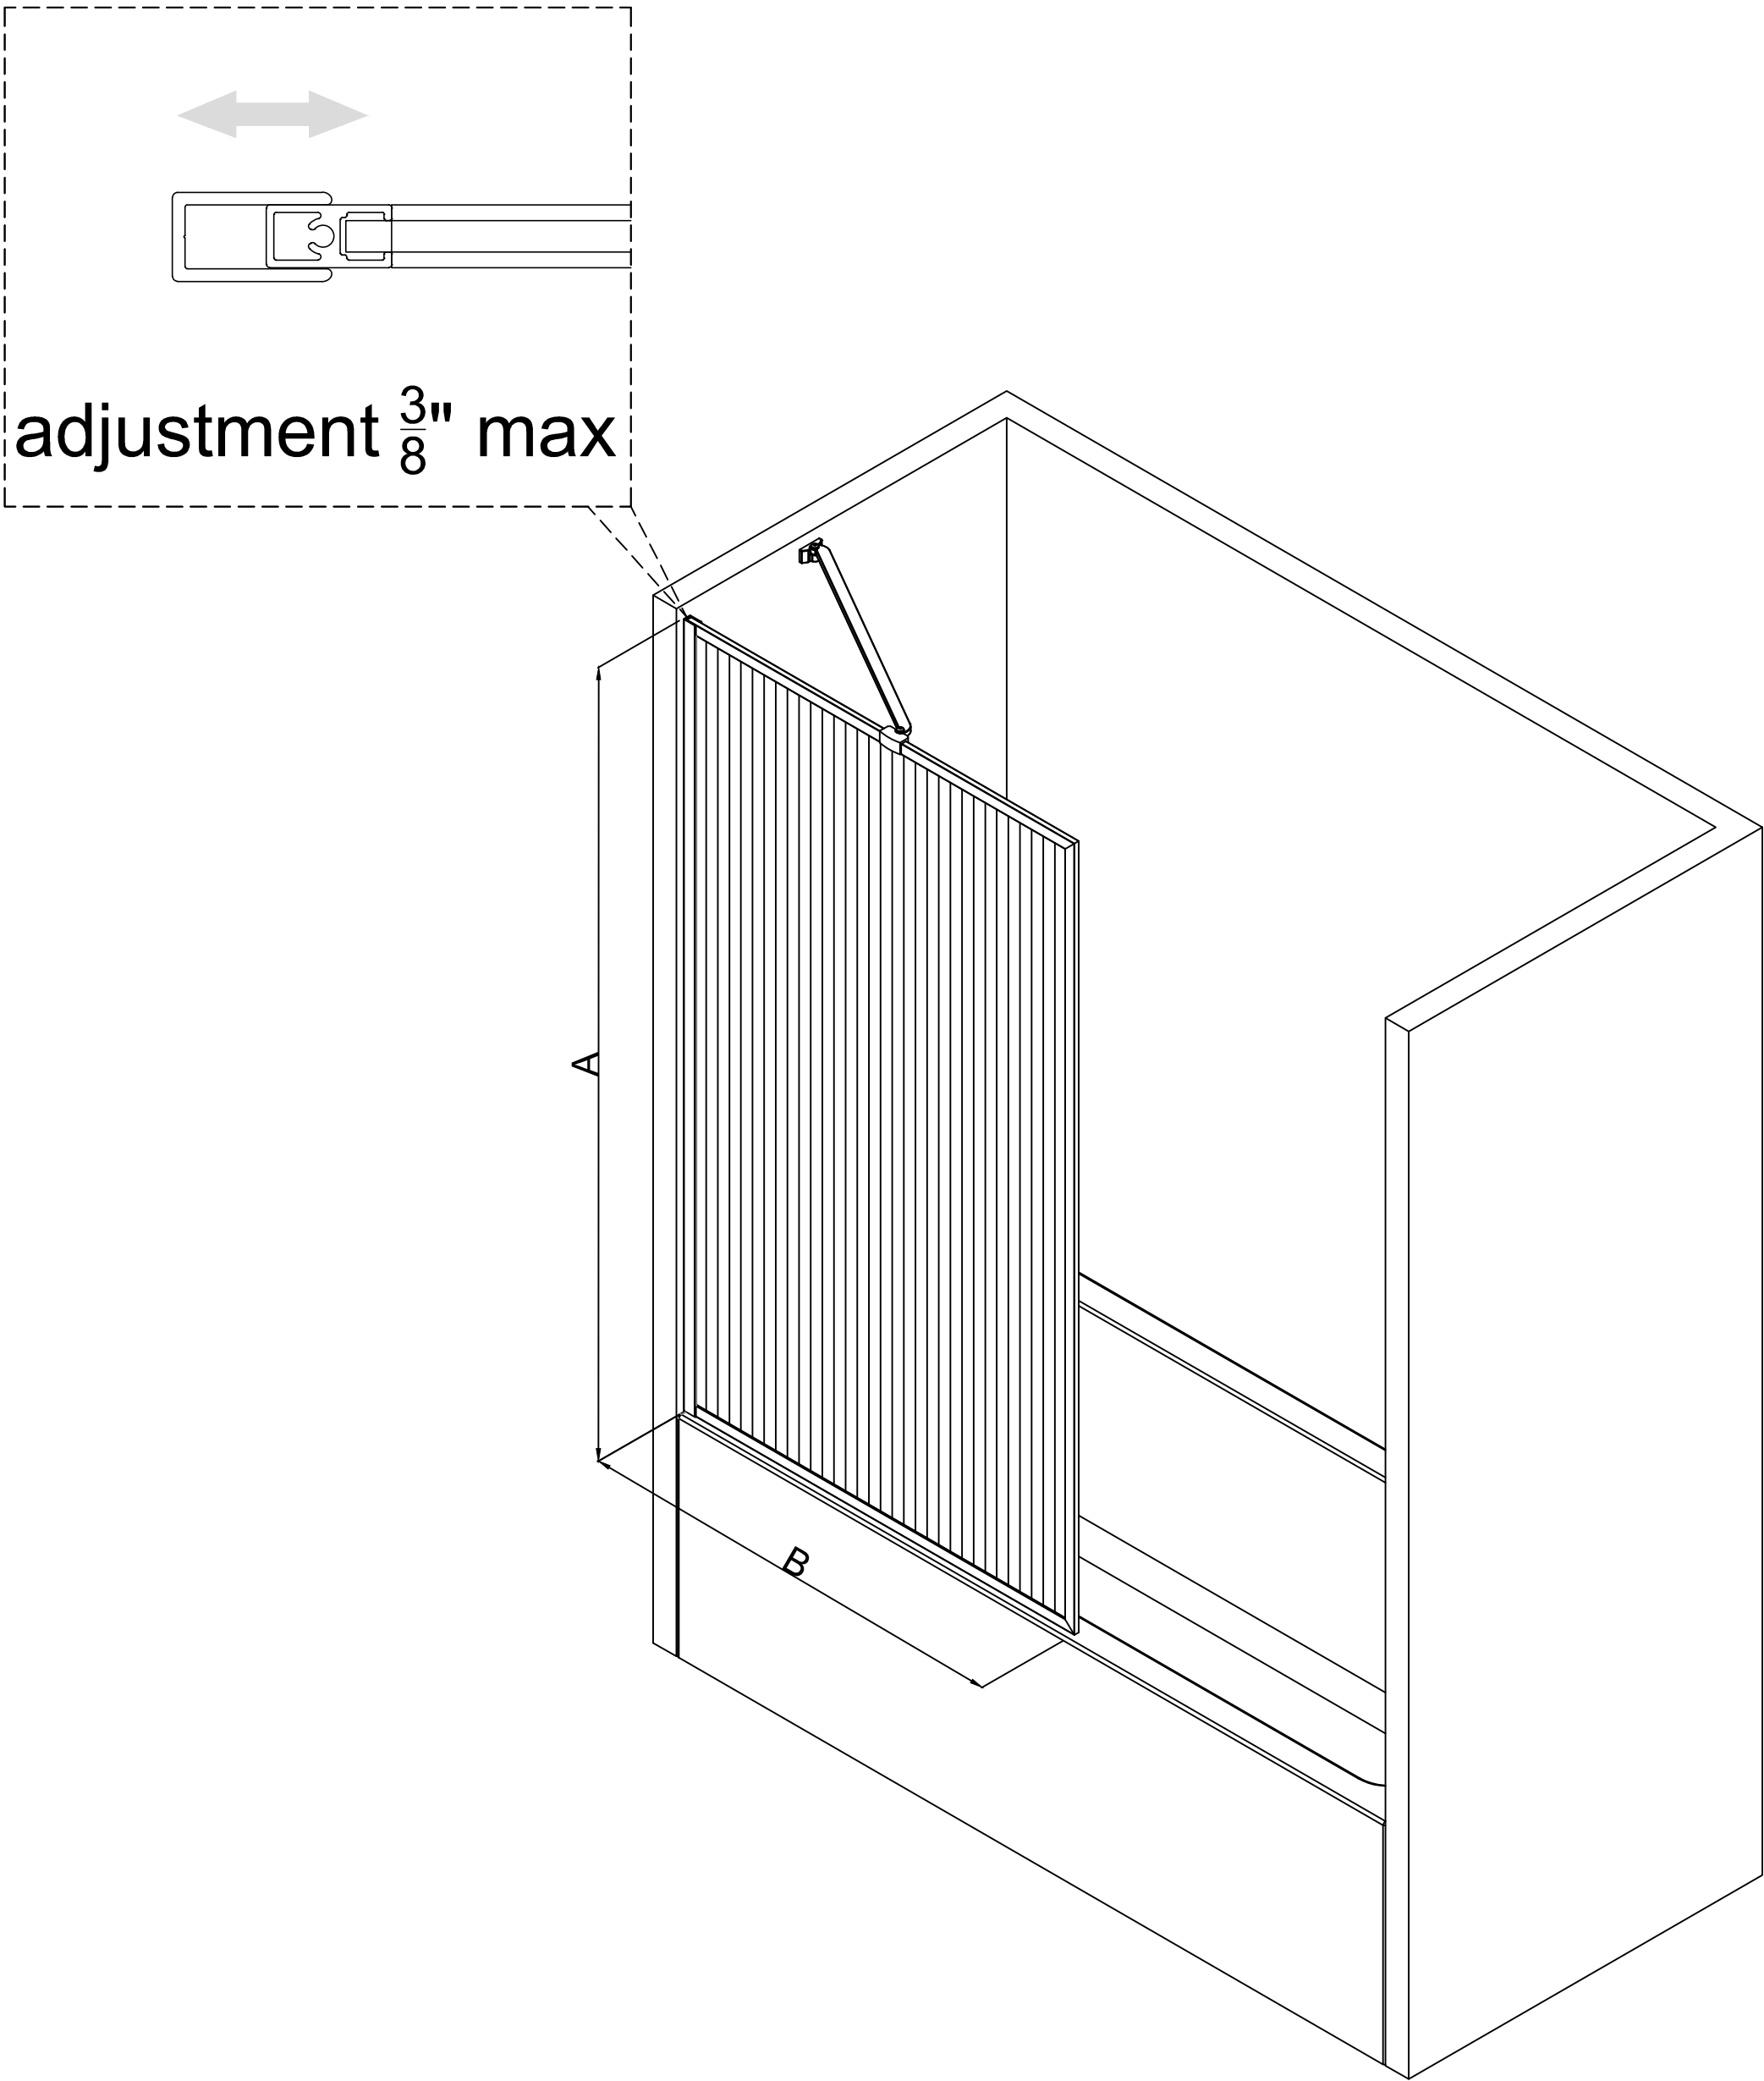

configuration dimensions:





A Product Height	B Model width	Installation width
58"	33"	33" ~33 3/8"

1

Wall Jamb(B) Installation

NOTE

Confirm the **Wall Jamb(B)** is plumb with a level before marking the location of the holes for drilling.

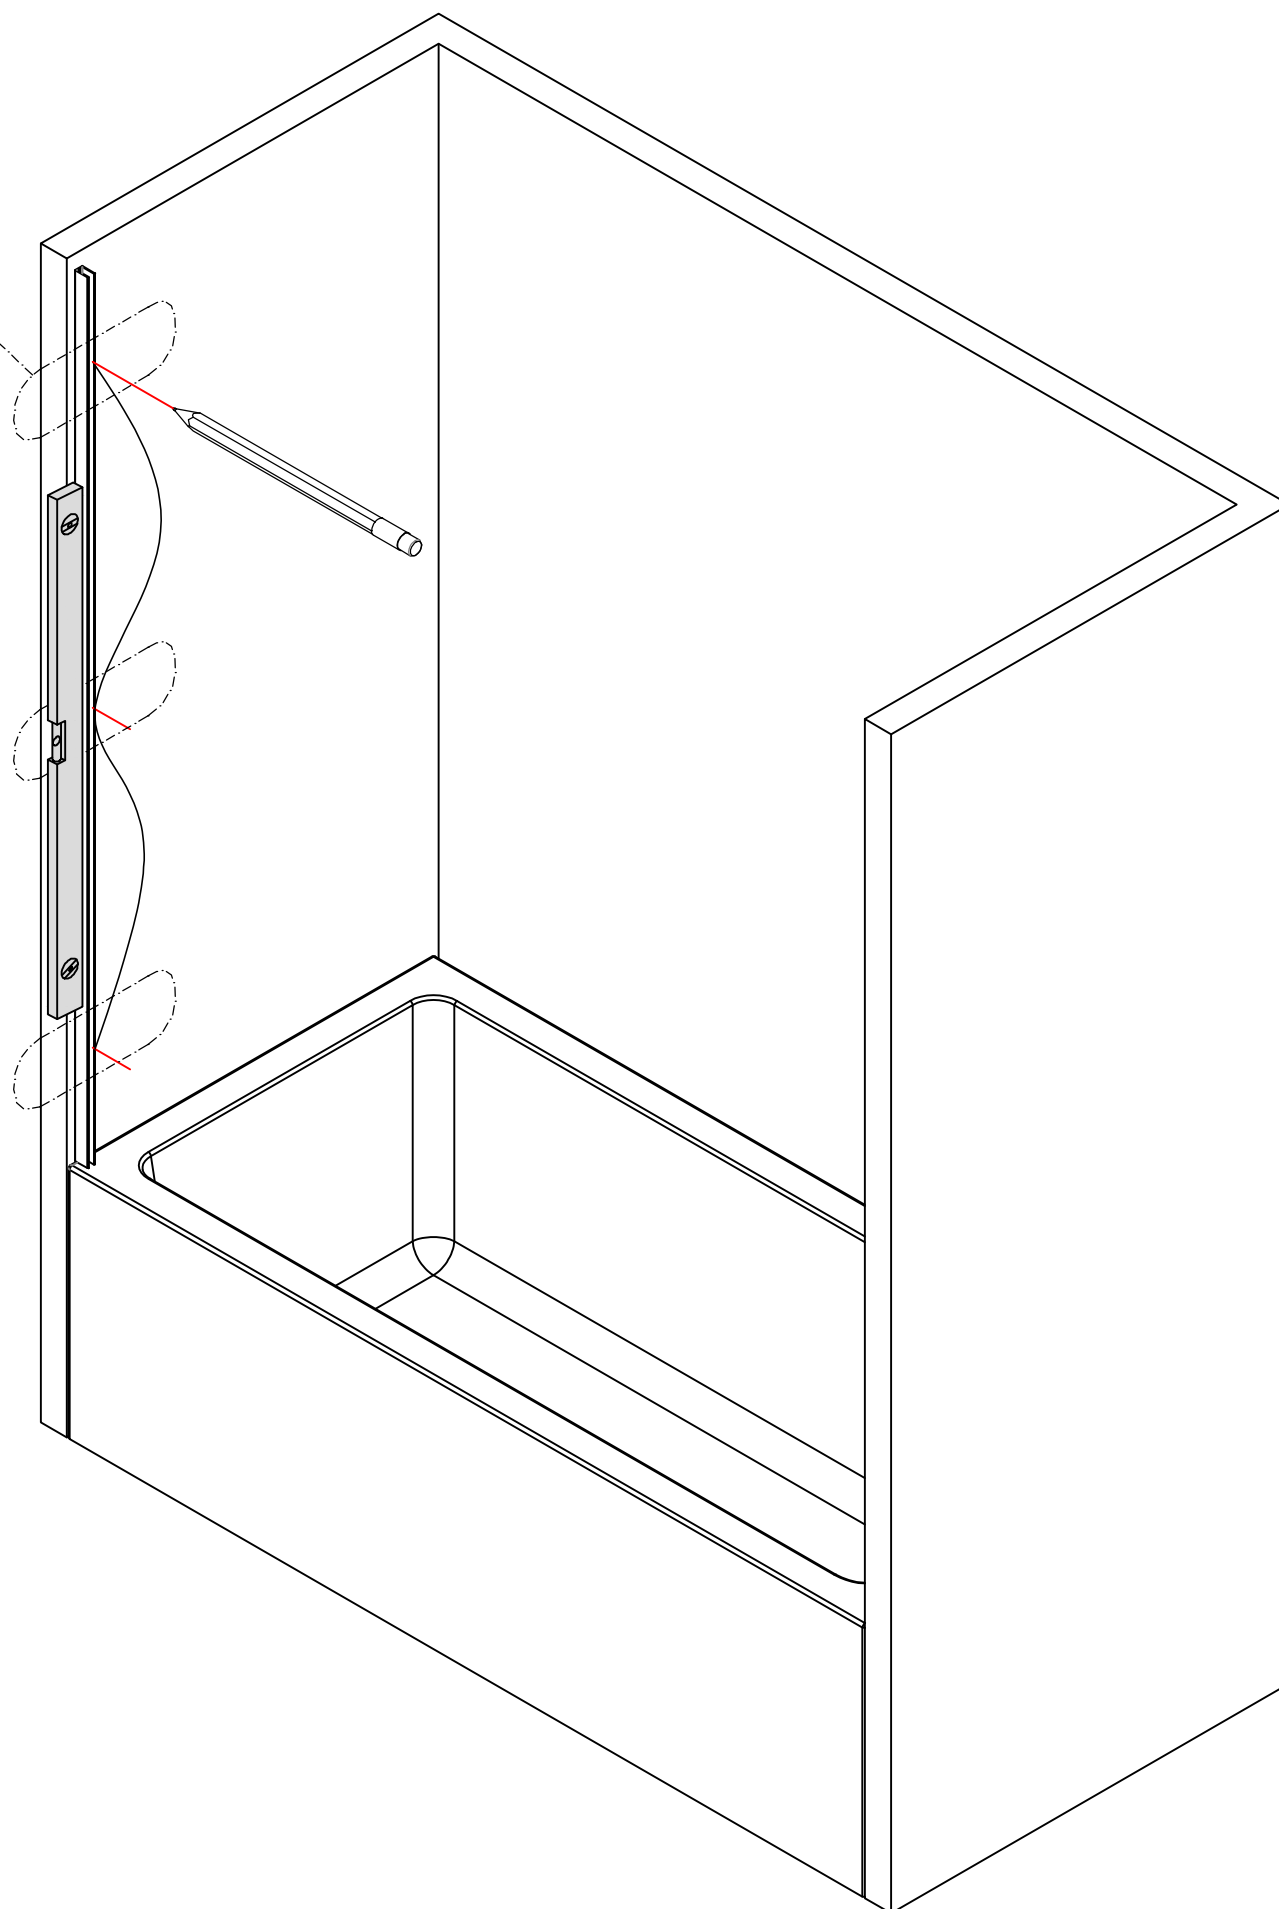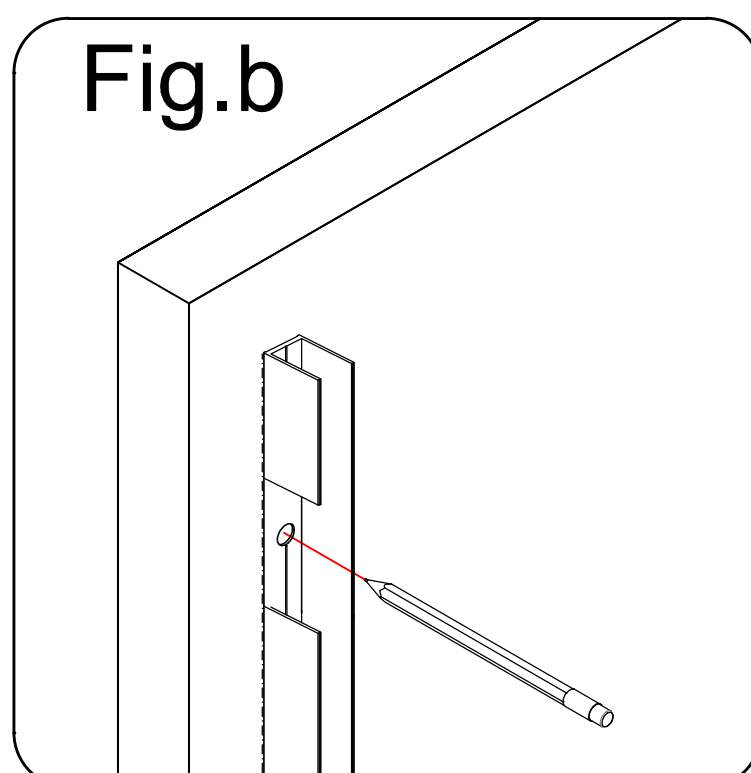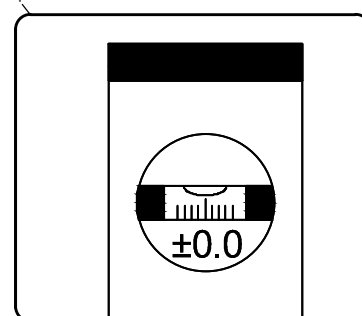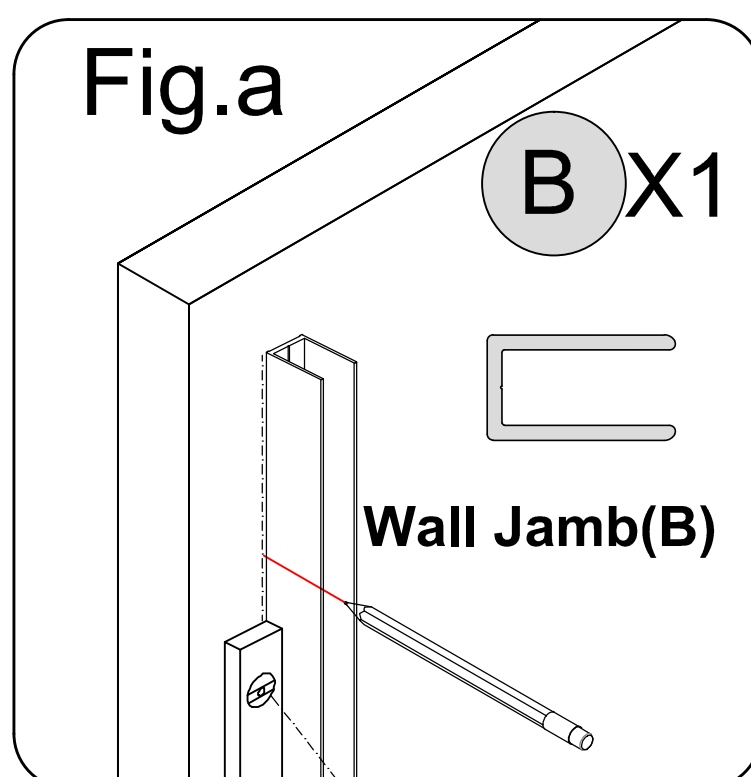

NOTE

Wall jamb (B) must be in line with the Center of Threshold.

1-2

Wall Jamb(B) Installation

Fig.a

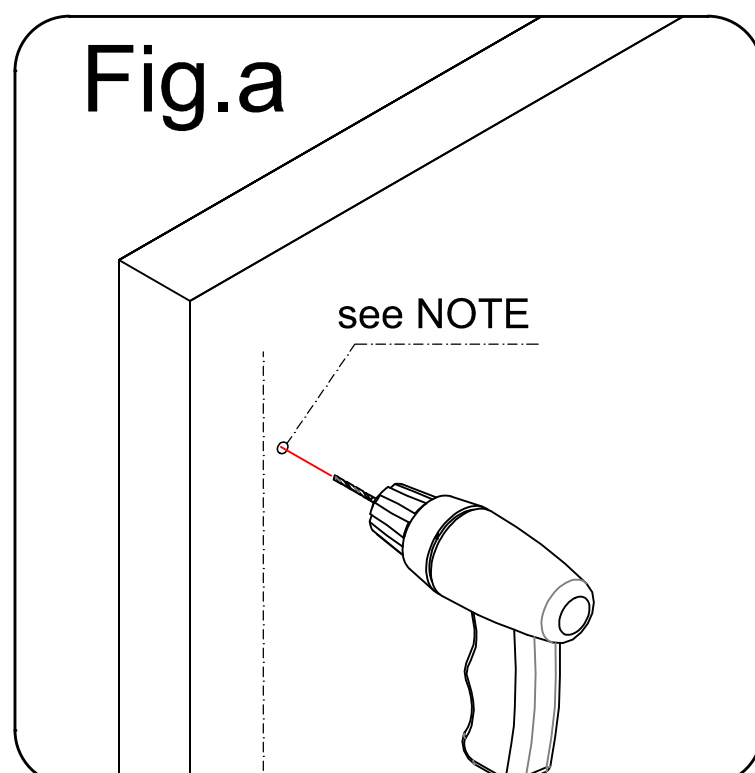


Fig.b

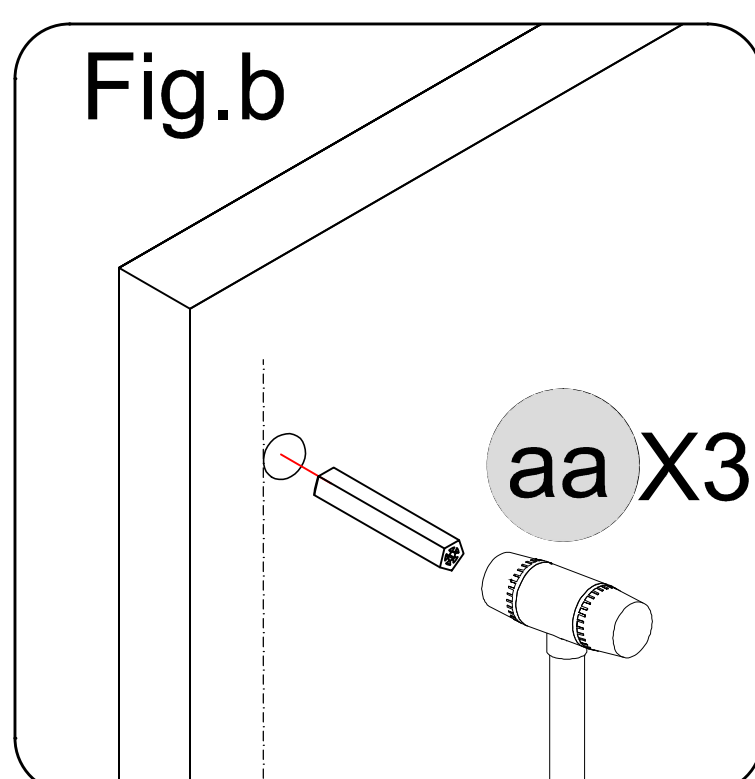


Fig.c



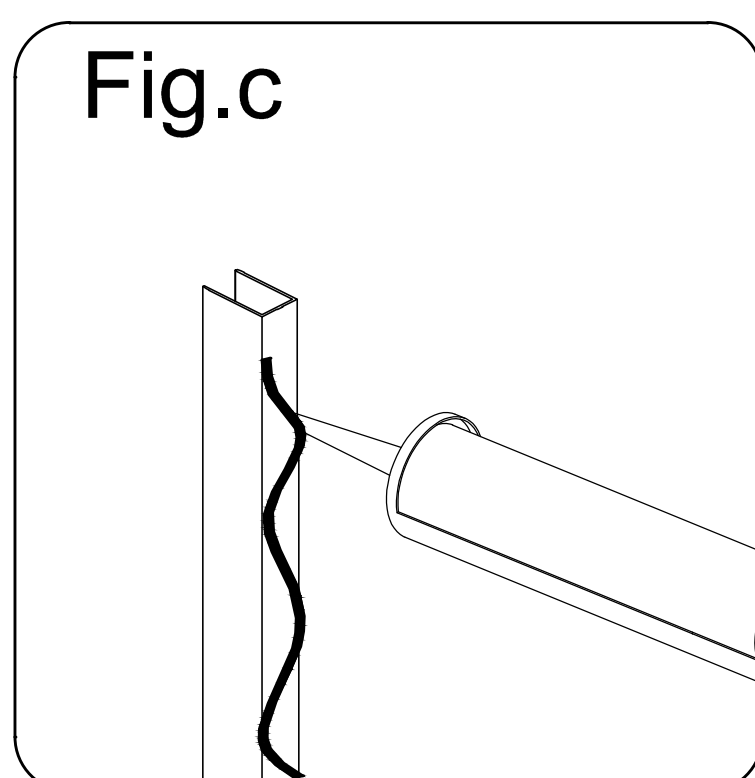


Fig.d

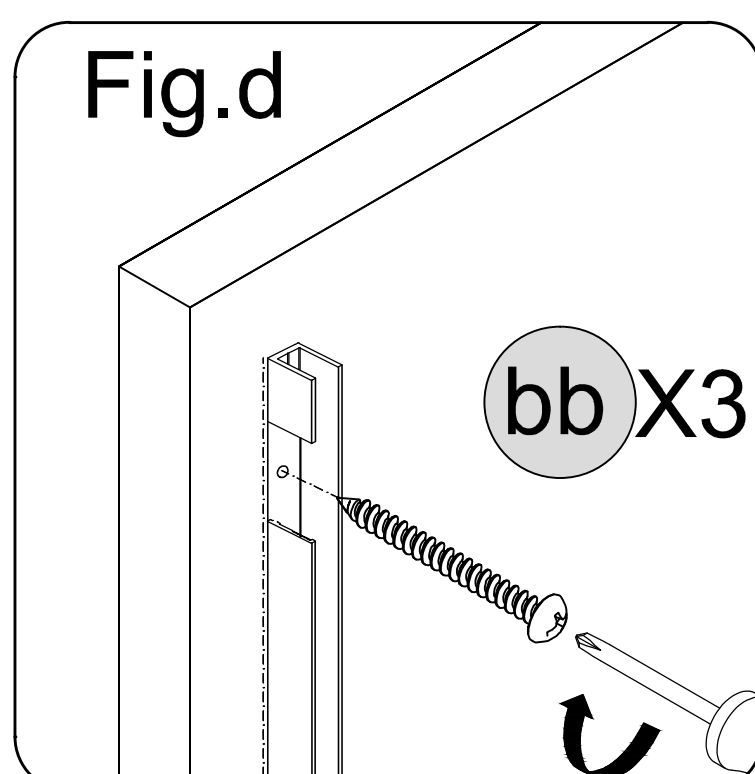

NOTE

1. Drill the holes as Fig.a and Fig.b;
2. Apply silicone into the groove along the entire length of the **Wall Jamb(B)** as Fig c;
3. Attach the **Wall Jamb(B)** to the wall as Fig d.

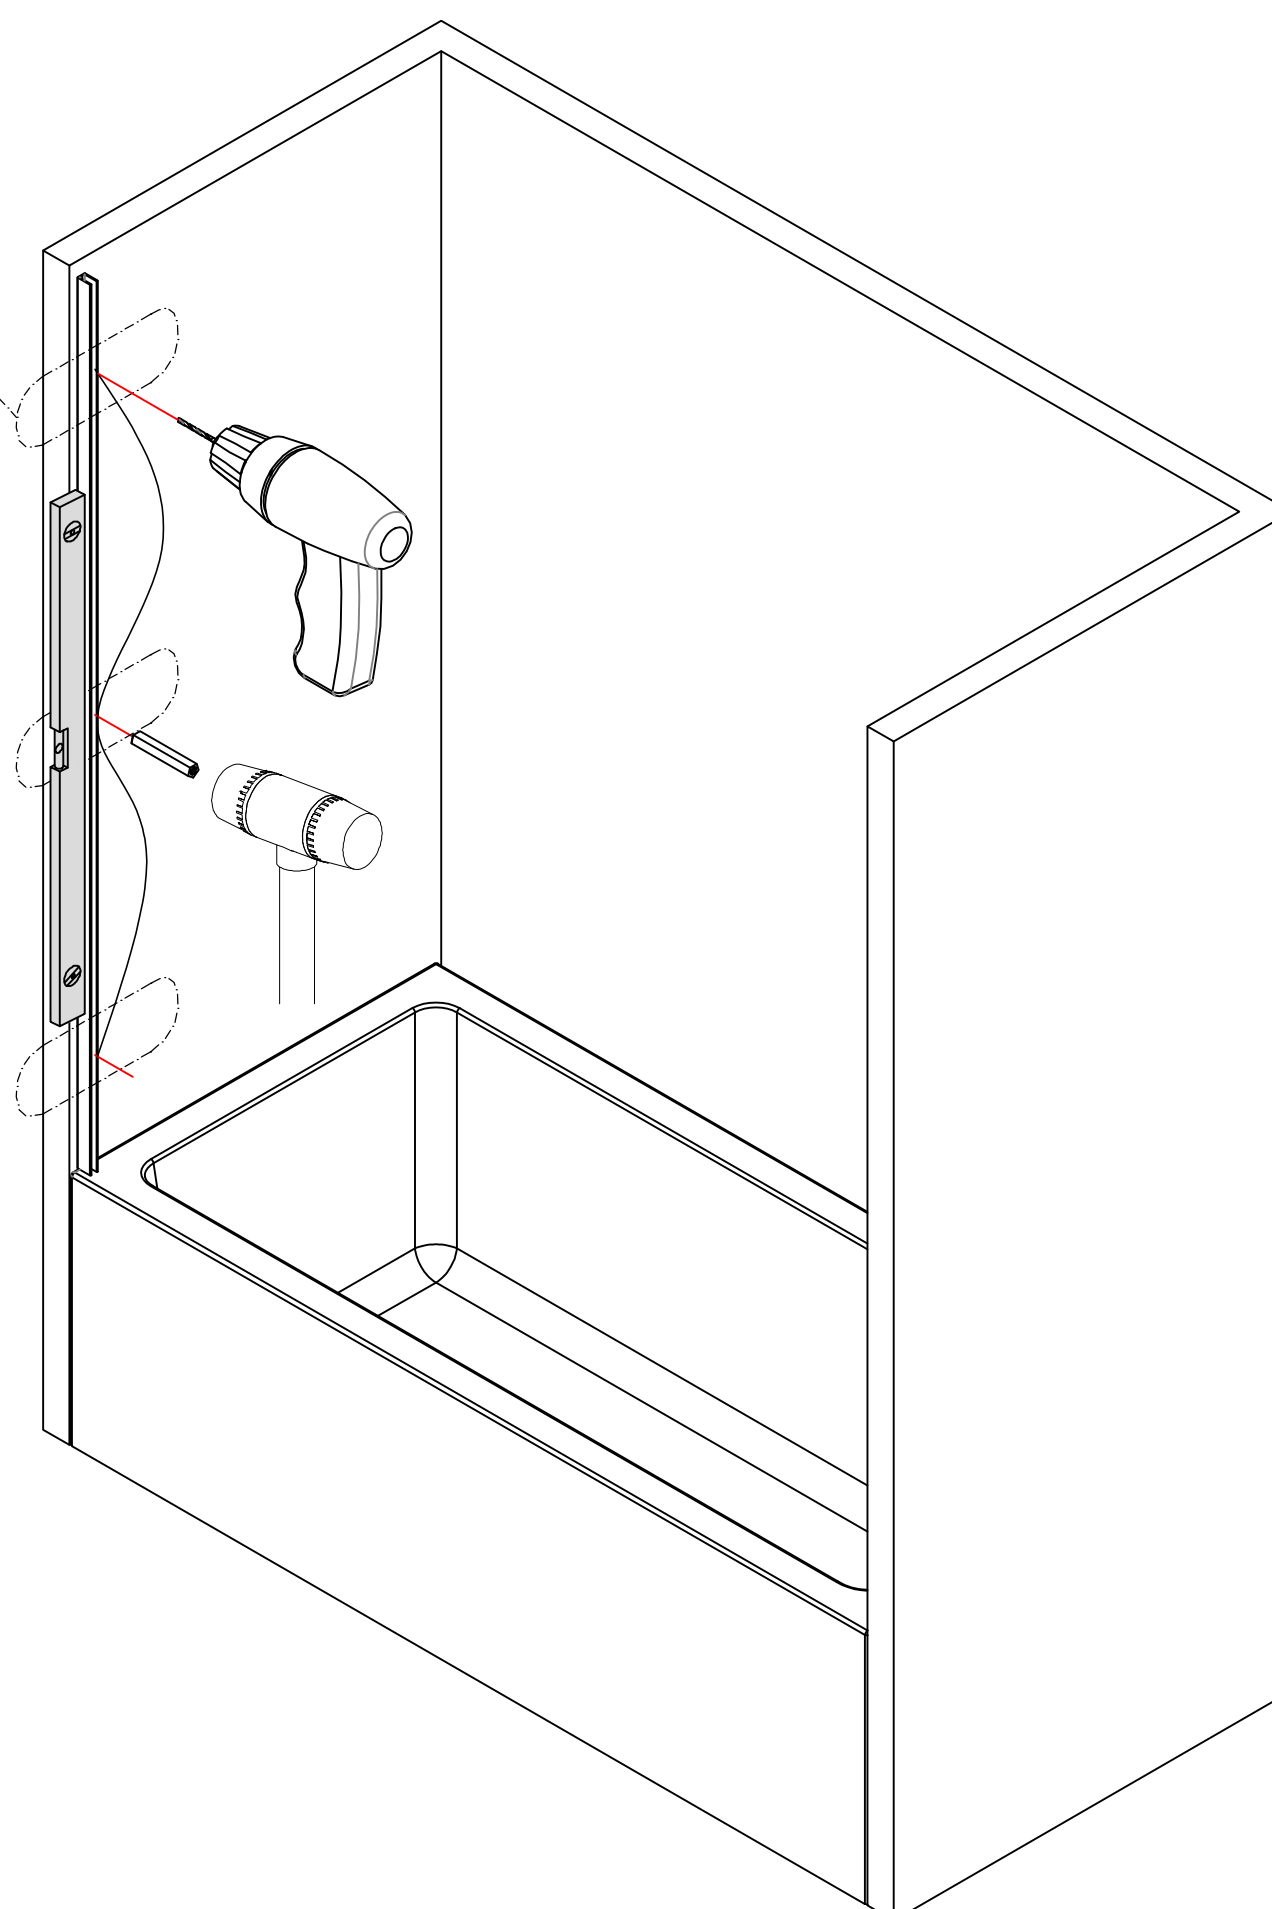




NOTE

- If a Stud is presented behind the wall:
drill a Ø1/8" (3mm) pilot hole into the stud and use the ST4.0 x 30mm **Screws (bb)**
OR
- If No Stud is presented behind the wall:
drill a Ø1/4" (6mm) hole and insert the **Wall Anchors (aa)**
and use the ST4.0 x 30mm **Screws (bb)**.

2 Stationary Glass (A) Installation

NOTE

Insert the **Stationary Glass (A)** into **Wall Jamb (B)** .

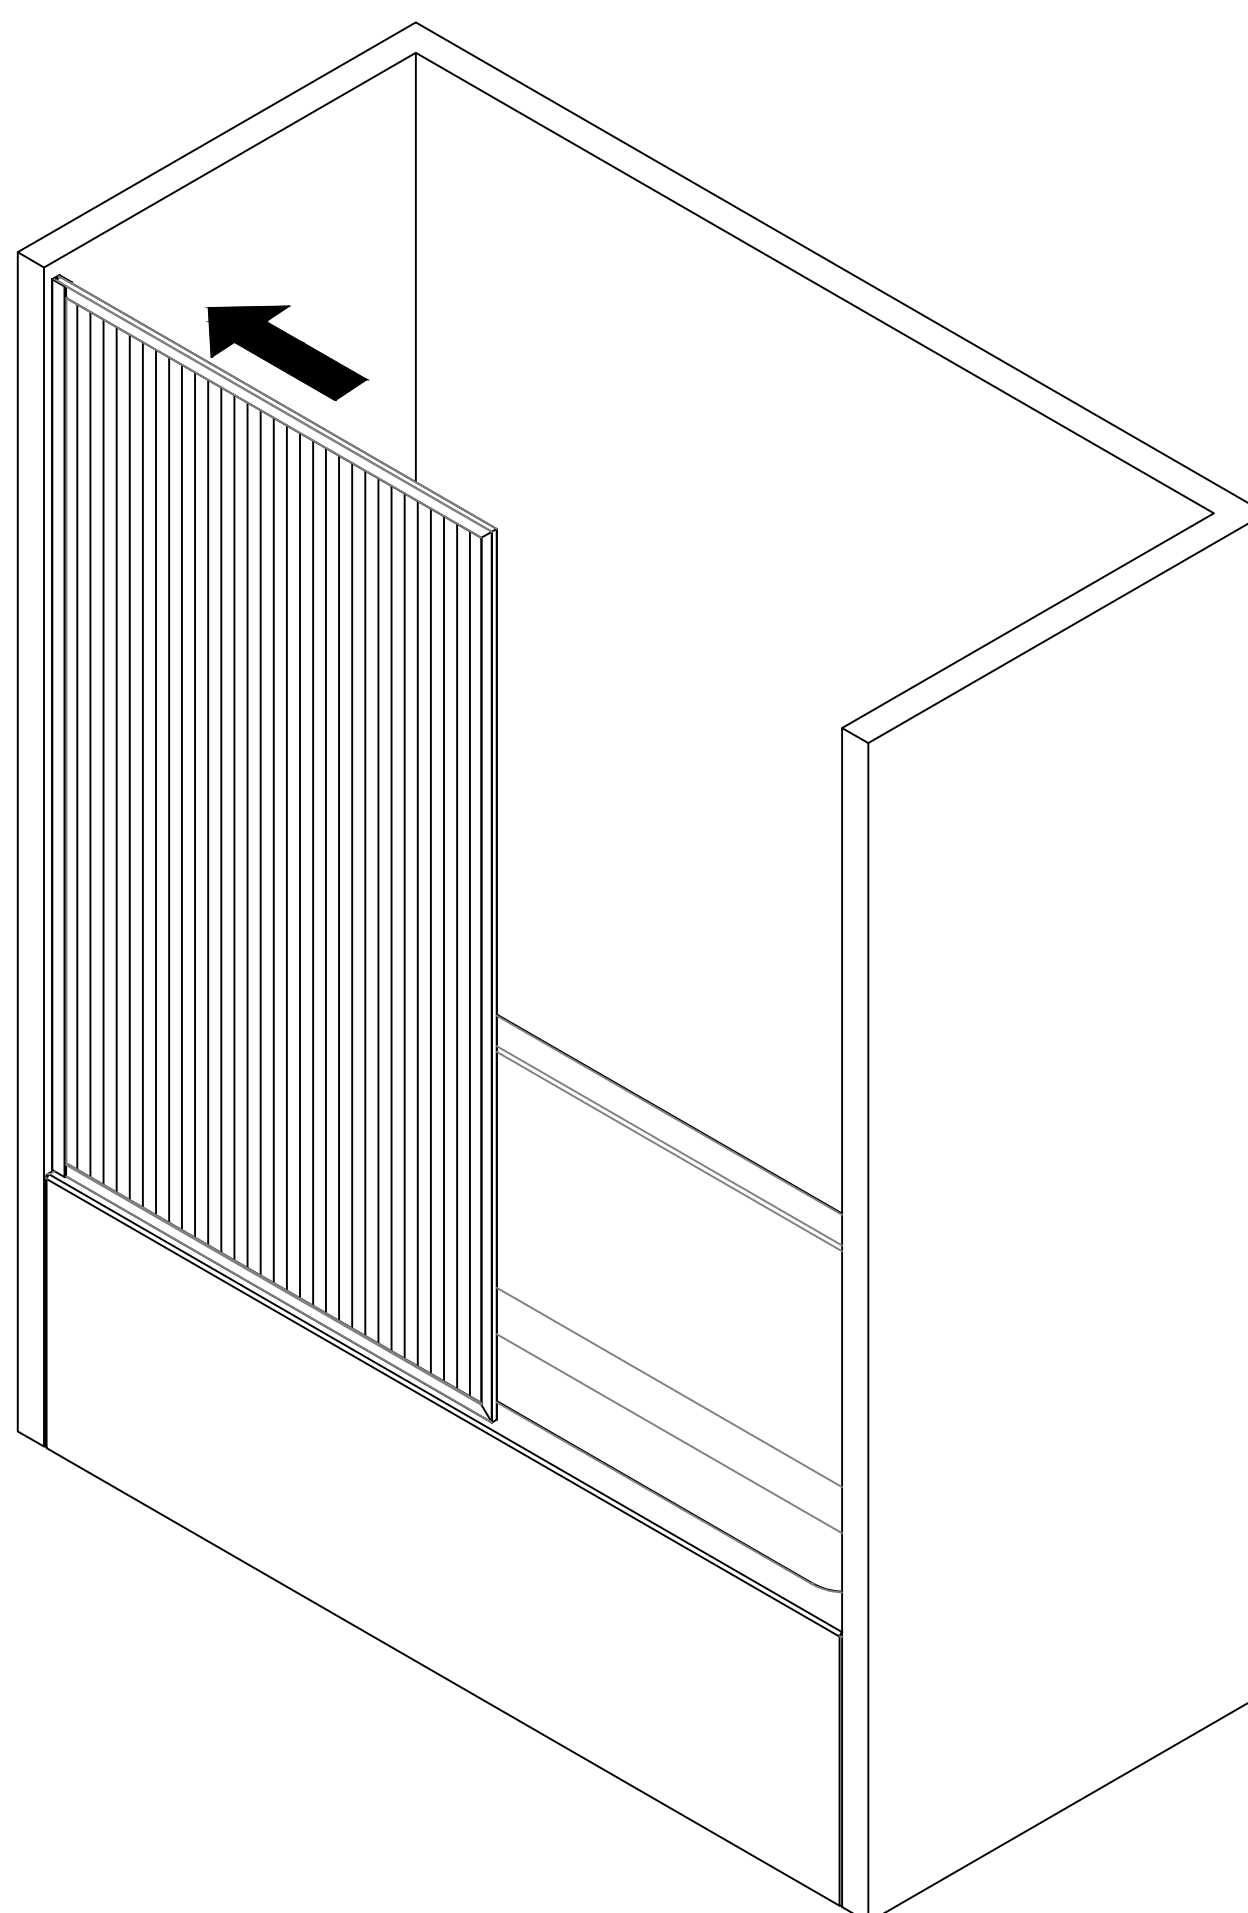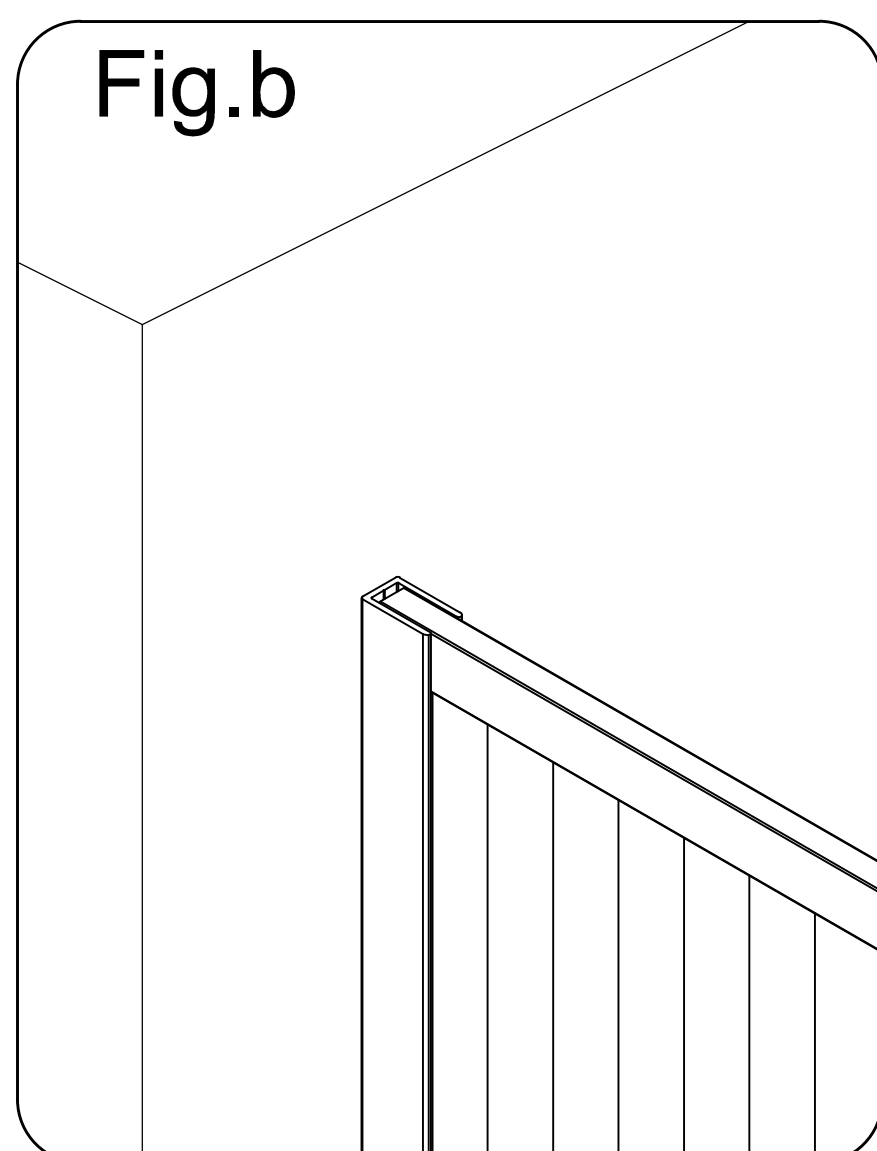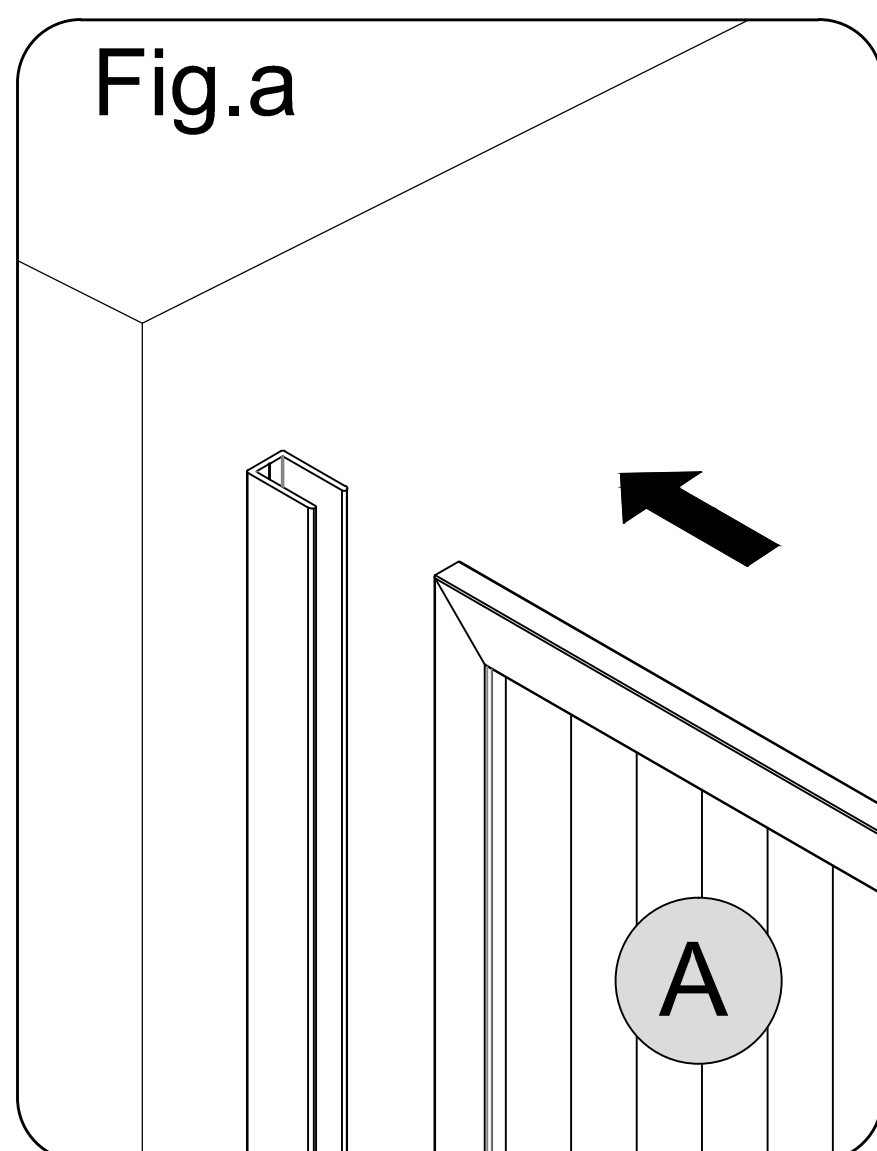

3 Stationary Glass (A) Installation

Inside View

Fig.a

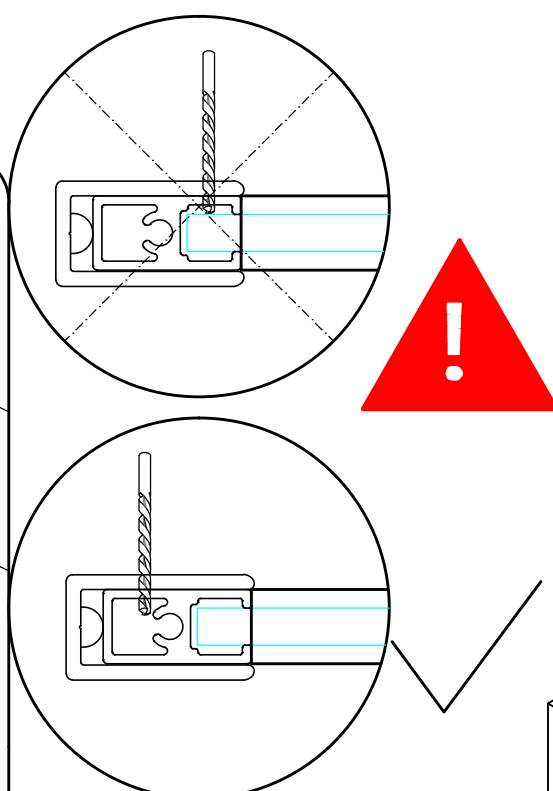
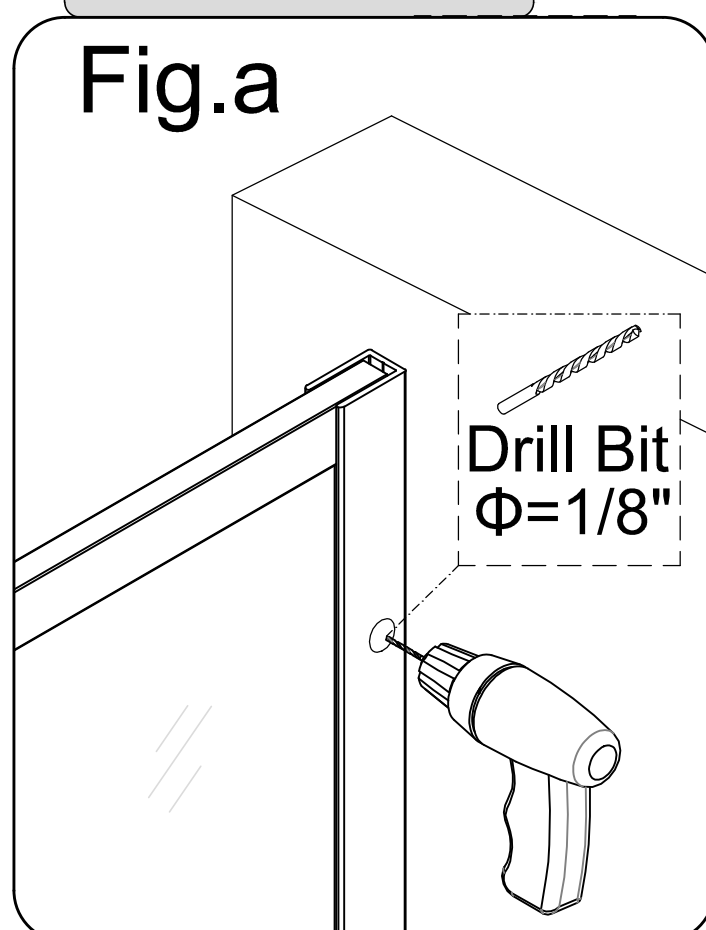


Fig.b




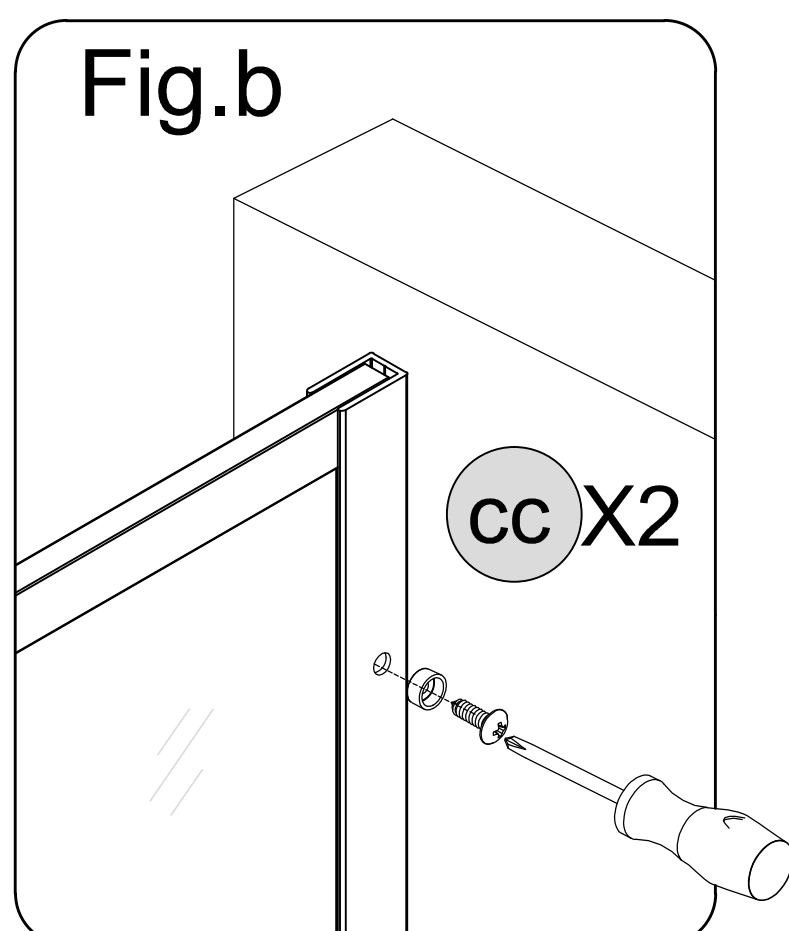


Fig.c

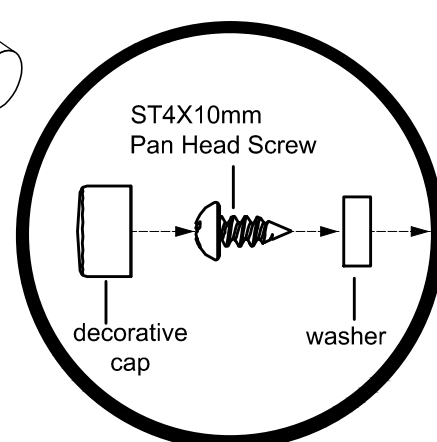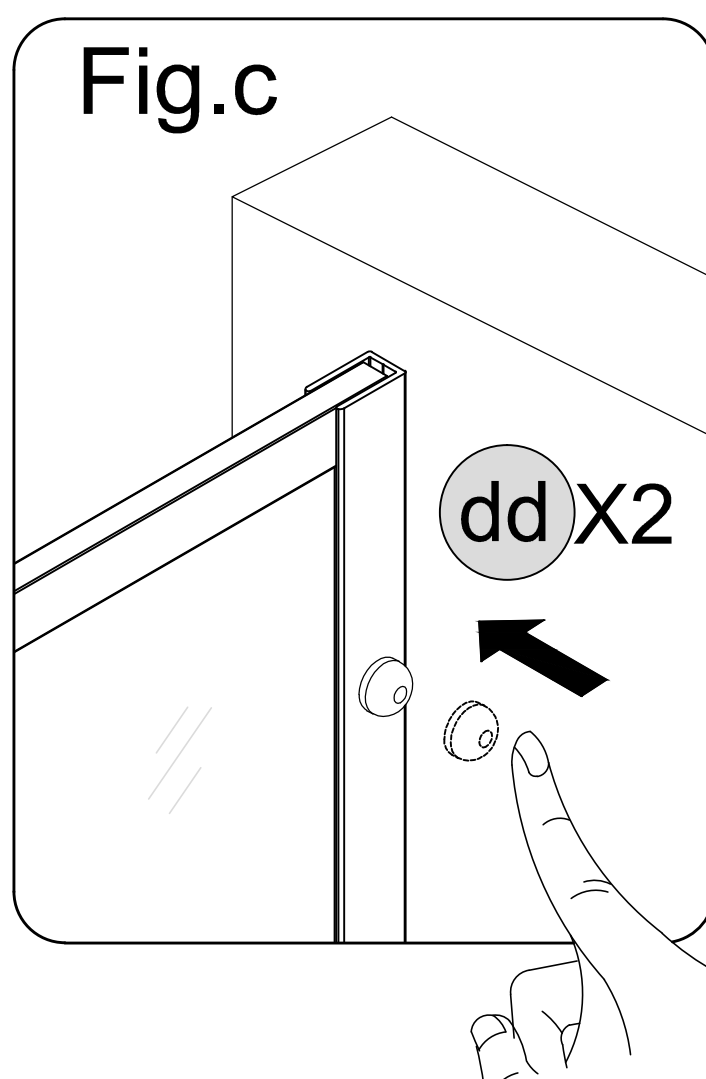

NOTE

Include the washers when installing the ST4.0×10mm Pan Head Screws (dd) and Decorative Caps (cc) .

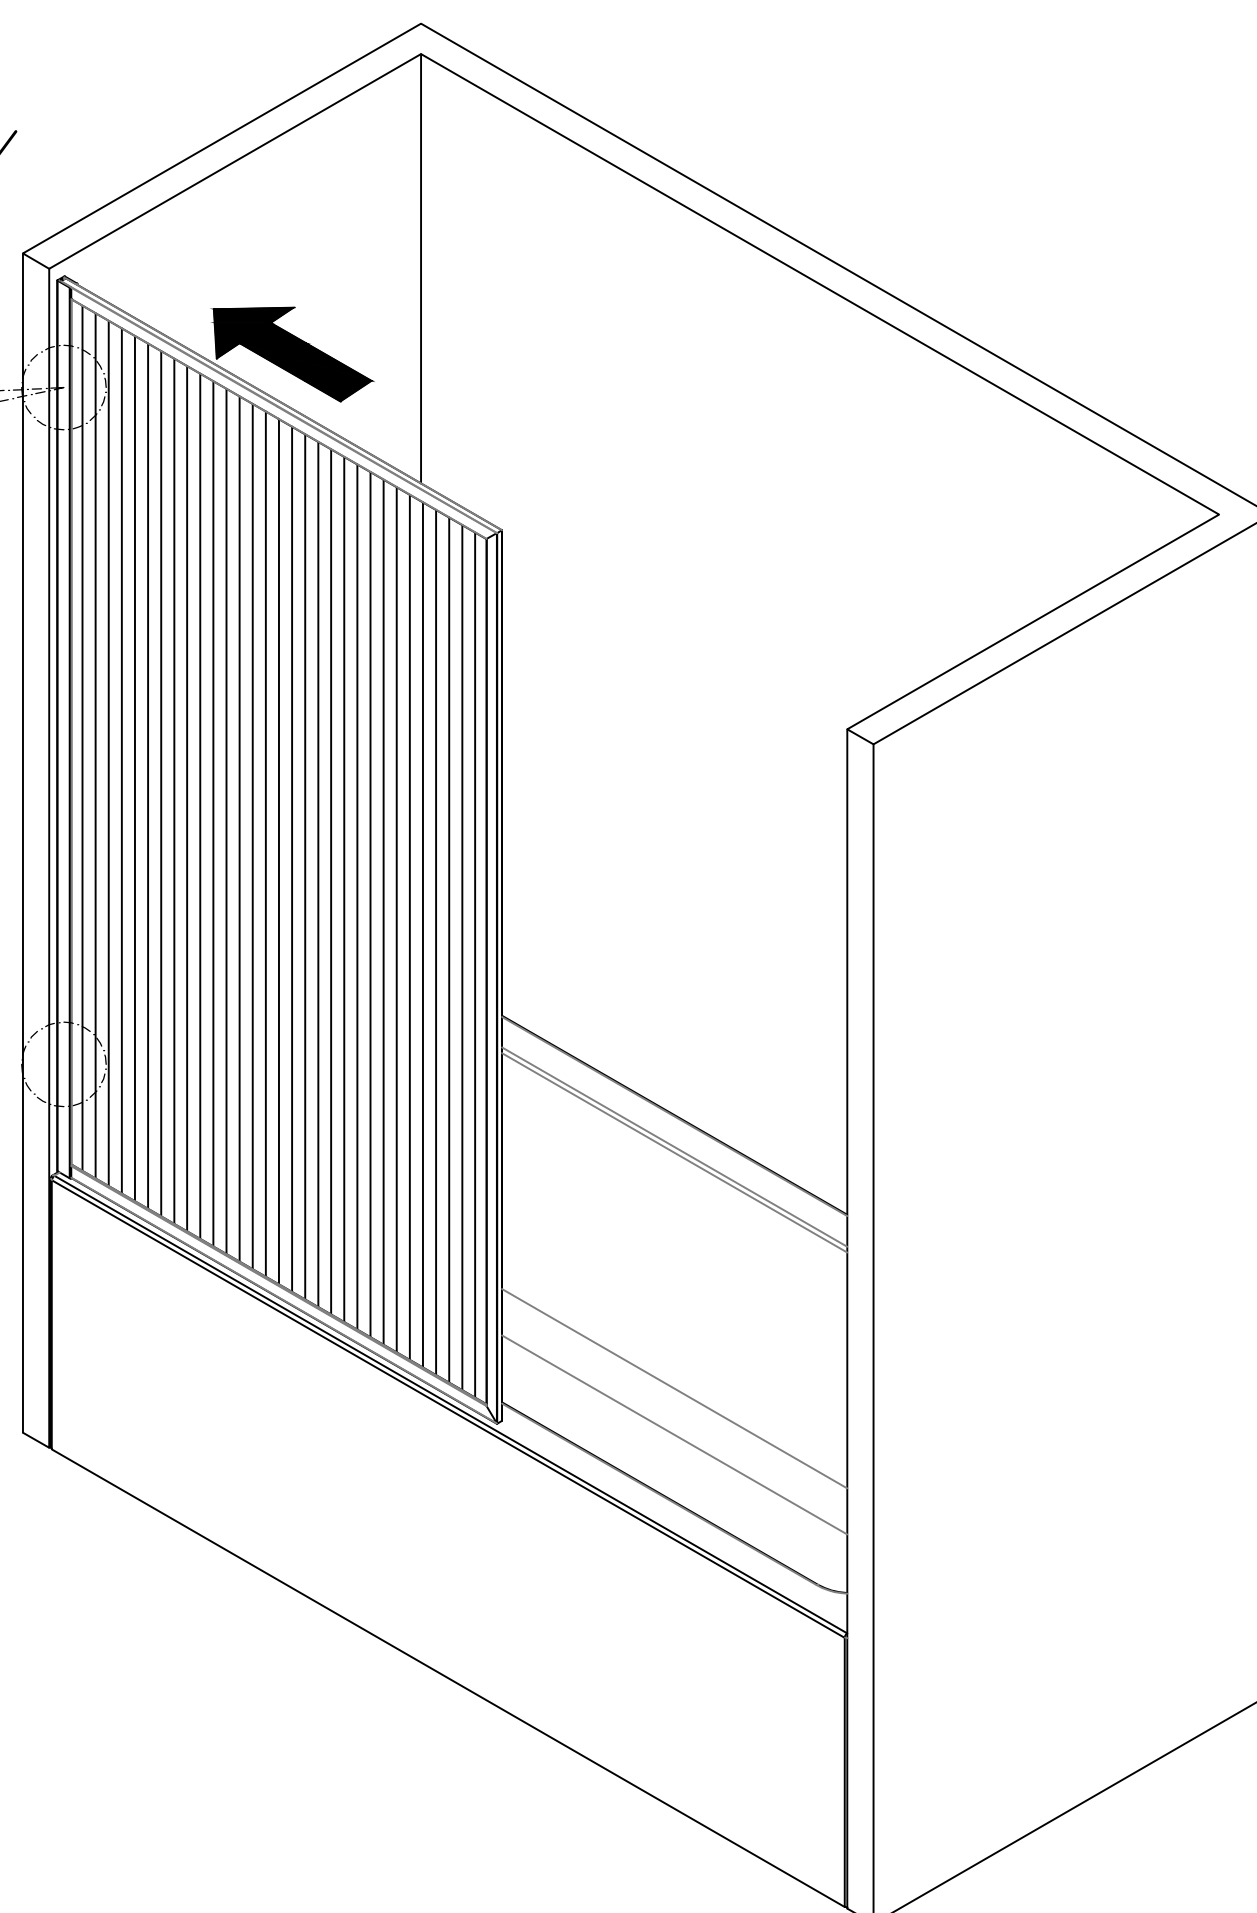

4

Top Bar (C) Installation

NOTE

1. Use a level and position the **Top Bar (C)** onto the **Stationary Glass (A)** as shown and mark the position on the wall as Fig.a
2. Remove the **Top Bar (C)** and mark the holes for drilling as Fig.b;
3. Drill one $\text{Ø}5/16''$ (8mm) hole and insert the **Wall Anchor (ee)**. Attach the **Top Bar (D)** using **ST5 x 30 Screws (ff)** as Fig.c、 Fig.d and Fig.e;
4. Position the **Top Bar (C)** onto the **Stationary Glass (A)** and onto the wall as Fig.f

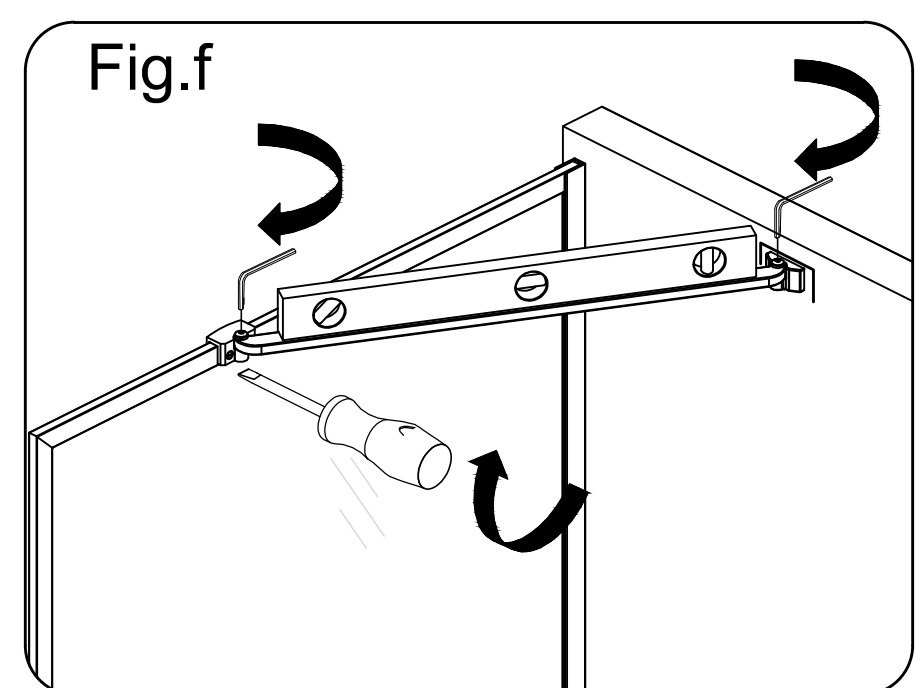
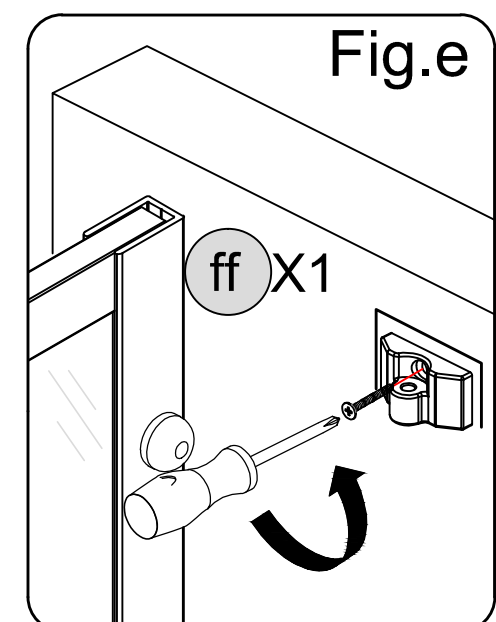
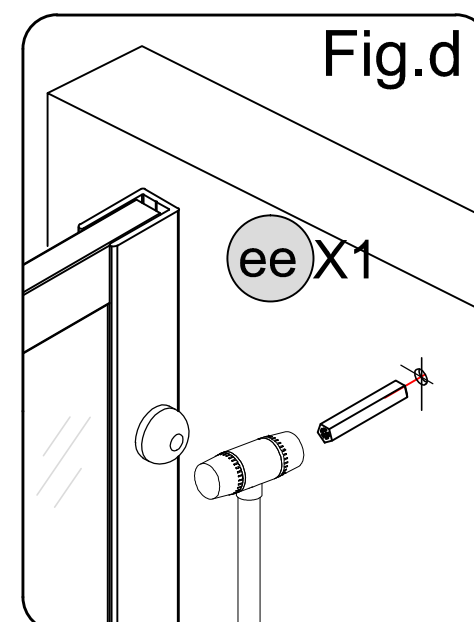
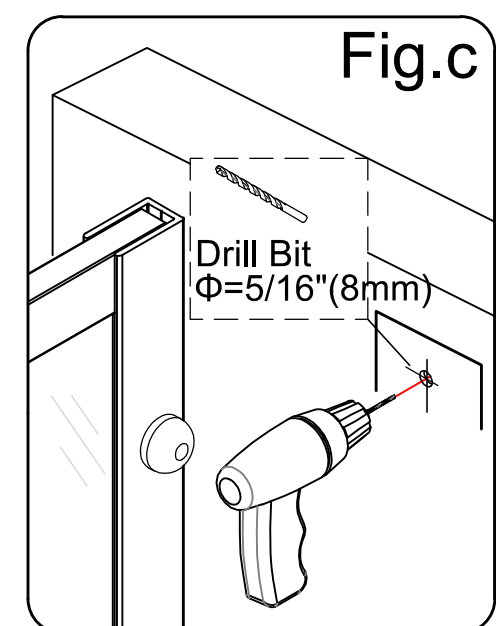
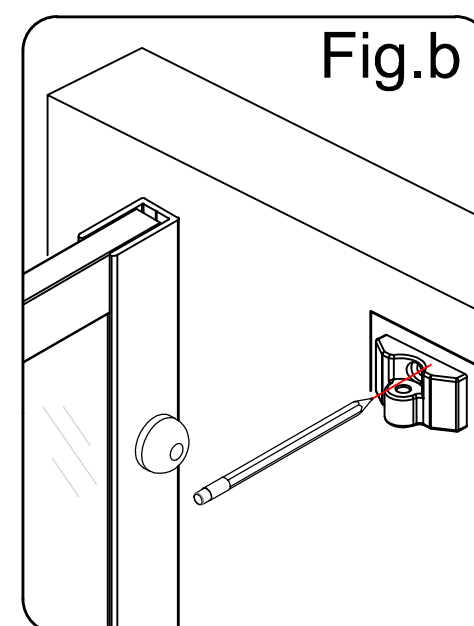
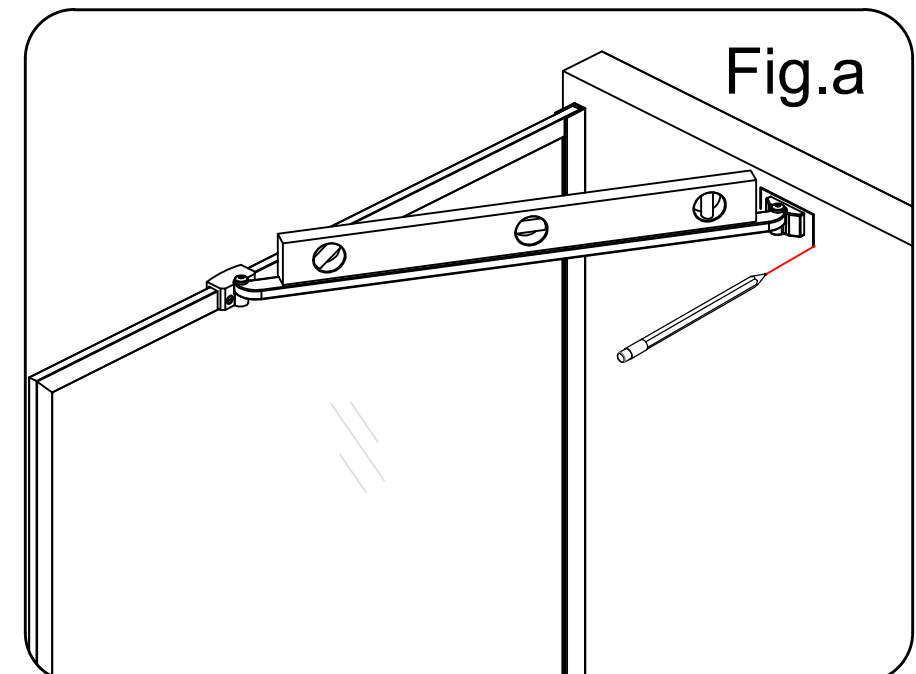
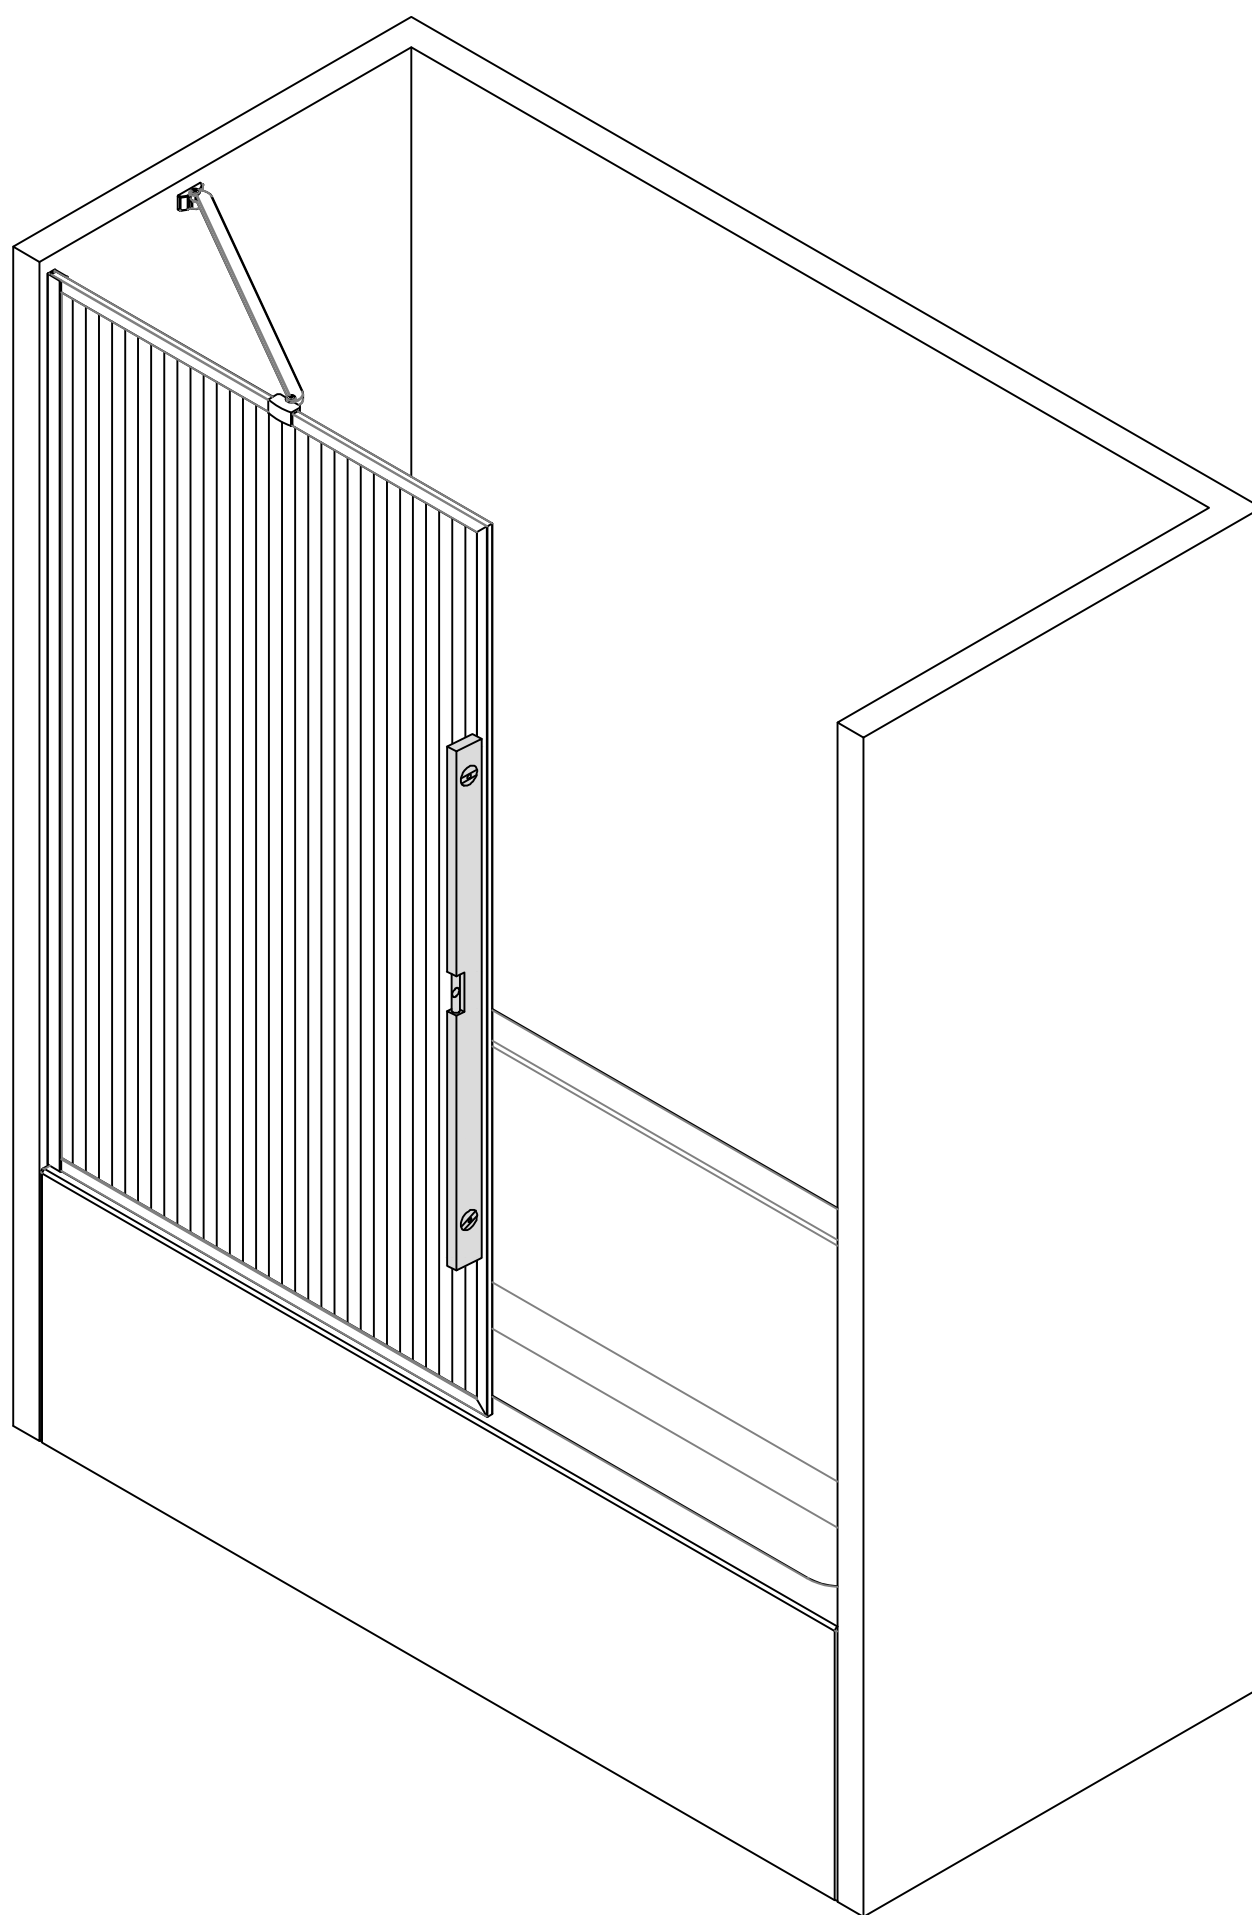


Fig 13

5

SEALING

NOTE


The surfaces need to be clean and free of debris before applying silicone.

NOTE

Apply a good quality silicone sealant along the wall Jamb(B) and Bottom Stationary Glass (A) .



Allow 24 hours for the silicone to cure before using the shower.

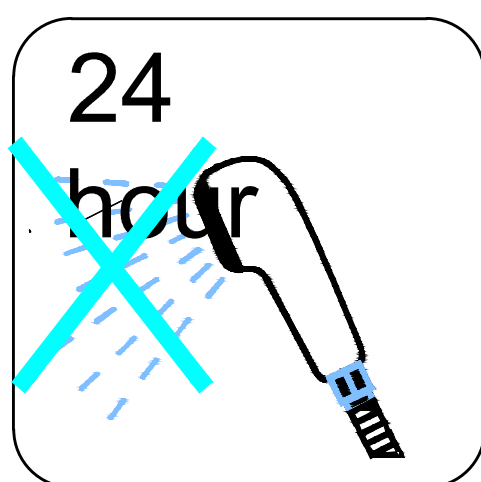

! Apply Silicone Sealant, (not supplied).

