



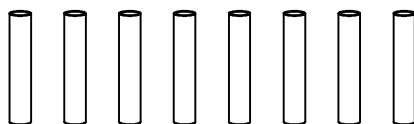

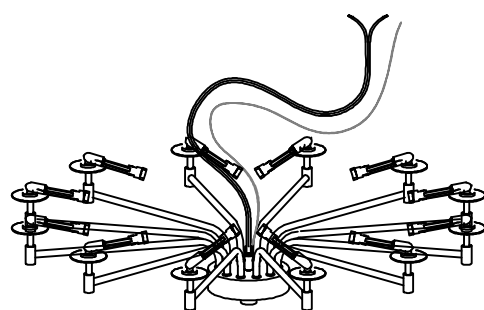


Parts

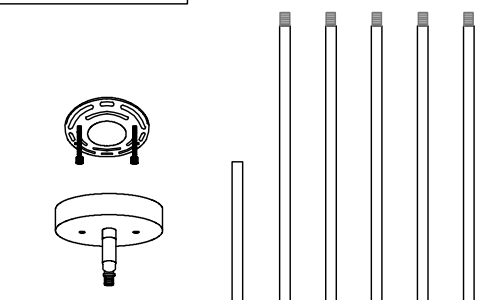


Steps 1

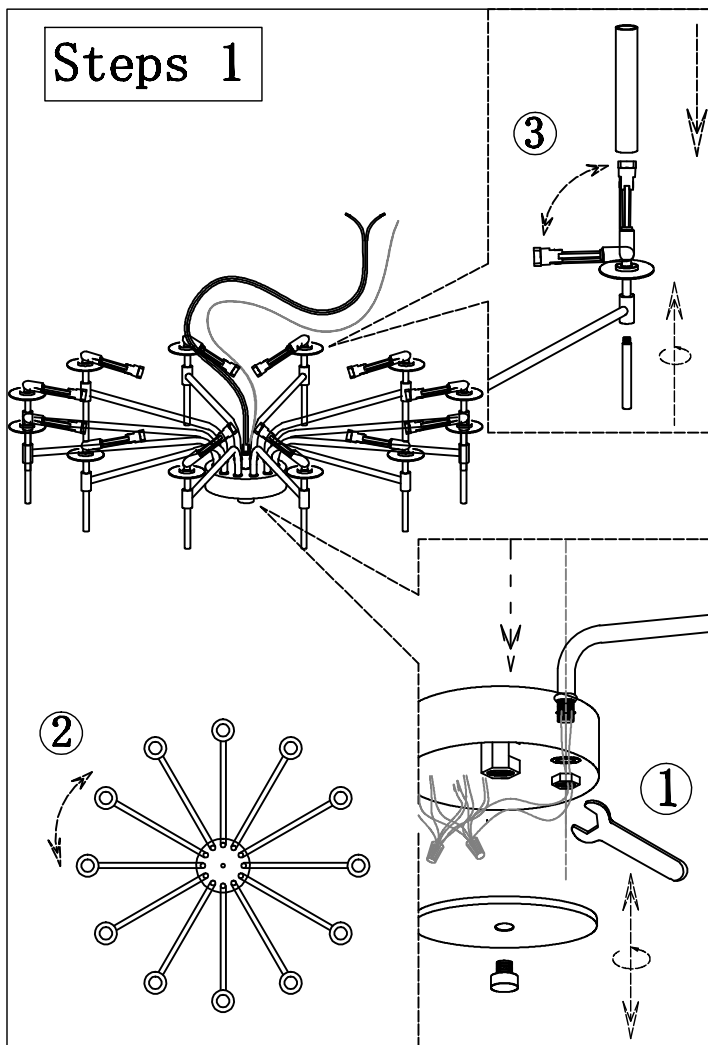

1. First, remove the flat-head nut and flat cover, find 6 untight lamp arms and tighten them with a wrench, and then install the flat cover and flat-head nut.
2. Adjust the lamp arm to 12 equal parts as shown in the figure.
3. As shown in the figure, adjust the 12 lamp heads to vertical, and then put on the lamp tube. A small short tube is twisted at the bottom of the lamp holder.

Steps 2

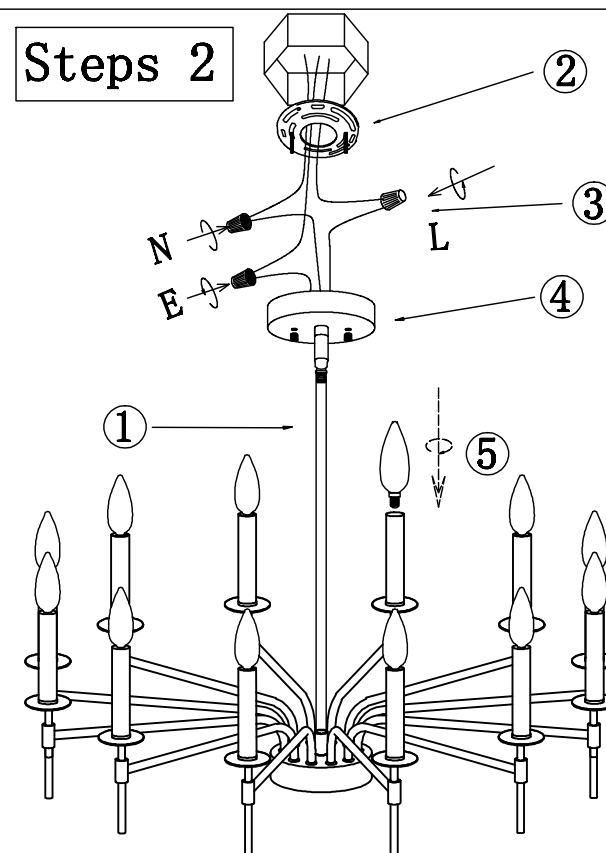

1. Get through the lamp wire to the hanging rod, and screw hanging rod to the light fixture. Get through the lamp wire to the canopy, and screw the canopy to the hanging rod.
(Install the hanging rod according to the length of the hanging rod you need)
2. Assembled the mounting bracket to the ceiling junction box with the screw.
3. Connect the power cord out from the ceiling junction to lamp wires with the lead wire and wire nut. According wire color to connect. (black for "L", white for "N", copper wire for "Ground E")
4. Assemble the canopy to the mounting bracket by tightening the ball nuts.
5. Install the bulb. Bulbs need to be purchased separately.