ASSEMBLY INSTRUCTIONS

OFFICE CHAIR







MODEL:1065







PARTS LIST

Before Assembly


Before you begin assembly, please verify that all parts are included. If any components are missing or damaged, or if you need assistance, please contact us via email. Our customer support team is committed to providing a prompt solution.

Ax1  Chair Back	Bx1  Seat Cushion	Cx1  Seat Plate
Dx1  Gas Lift	Ex1  Star Base	Fx5  Star Legs
Gx5  Casters	Hx1  Footrest	Ix1  Footrest Cushion
Jx2  Foot Pedal Guide Fastener	Kx1  Fixed Steel Plate	Tx2  Arms
Rx1 		

Mx4  M6x20mm	Nx10  M6x30mm	Ox10  M6x14mm
Px1  M5x8mm	Qx4  M6x25mm	Ux4  M6x35mm
Vx4  M8x20mm	Sx4 	

INSTALLATION STEPS


01

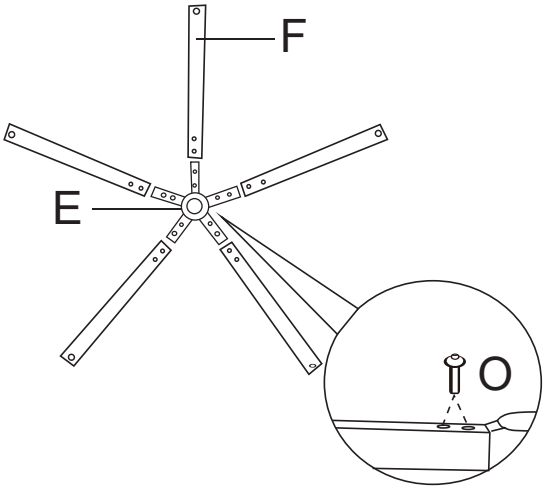

Step 1:

Use 10 M6×14mm screws (O) to secure the base legs (F)
to the center of the base (E). Tighten the screws.

02

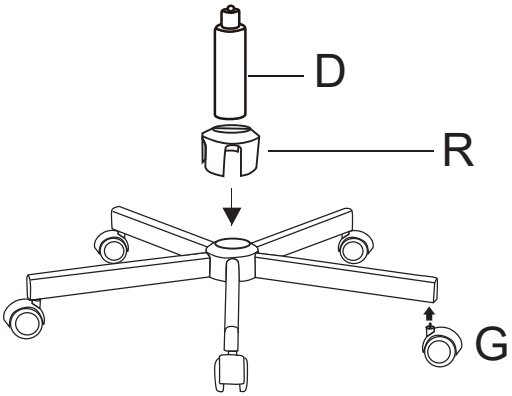


Step 2:


Insert the five casters (G) into one end of the base legs (F).
Insert the gas strut (D) into the center of the five-pronged base (E)
(pay attention to the orientation of the gas spring).

INSTALLATION STEPS

03

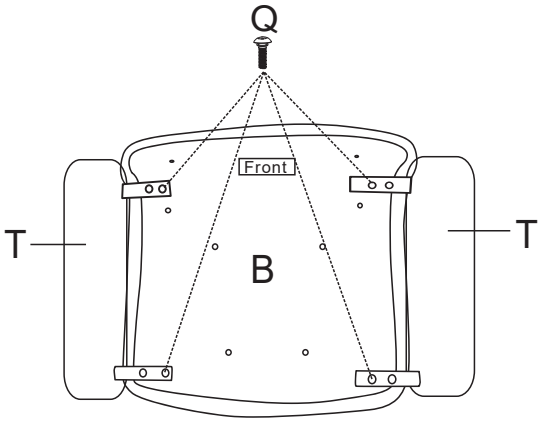

04

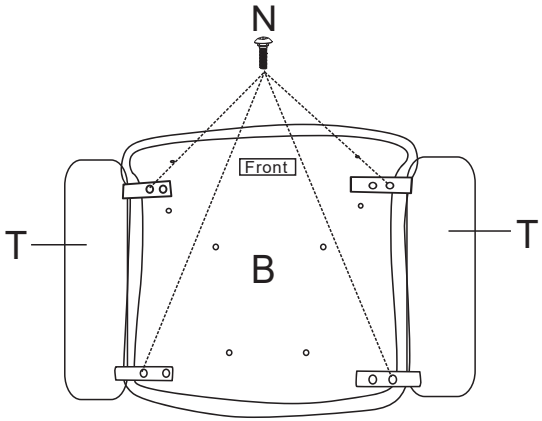


Step 3:

Secure the armrests (T) to the seat cushion using 4 M6×25mm (Q) and 4 M6×30mm (N) screws.

INSTALLATION STEPS

05

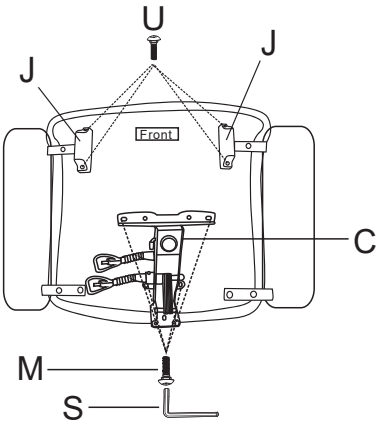


Step 4:

Use 4 M6×35mm (U) screws to secure the footrest rail fastener (J) to the bottom of the seat cushion (B).

Step 5:

Use 4 M6×20mm screws (M) to secure the seat panel (C) to the seat cushion (B).

06

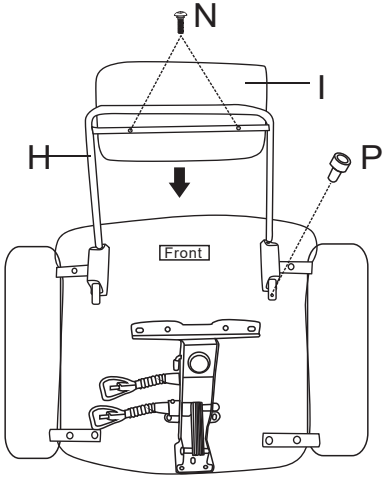


Step 6:

Use two M6×30mm screws (N) to secure part (I) to part (H).
Insert part (H) into part (J) and secure it with one M5×8mm bolt (P).

INSTALLATION STEPS


07

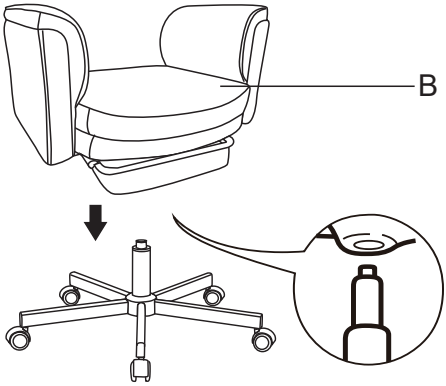

Step 7:

Place the assembled upper part of the chair onto the base.

08

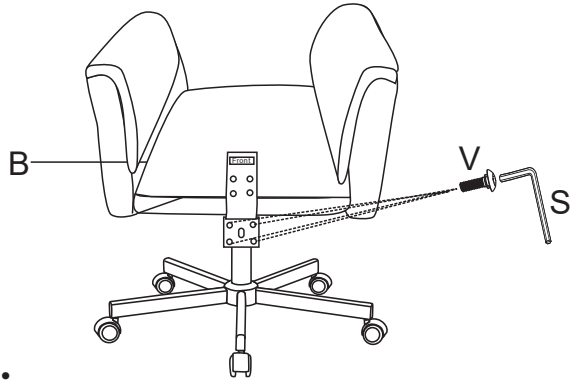


Step 8:

Use four M8×20mm screws (V) to secure the mounting plate (K)to the seat cushion (B).

INSTALLATION STEPS

09

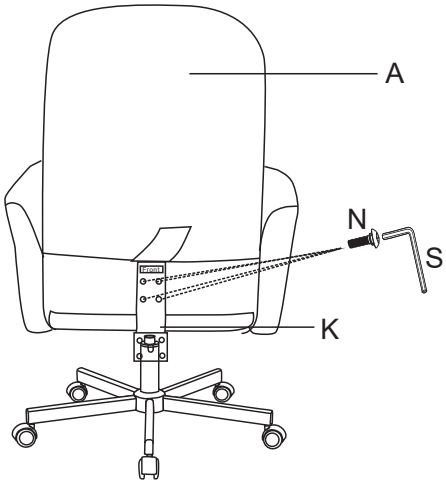


Step 9:


Use four M6×30mm screws (N) to secure the backrest (A) to the metal frame.

10






If the MECHANISM is properly installed, it should be on your RIGHT.

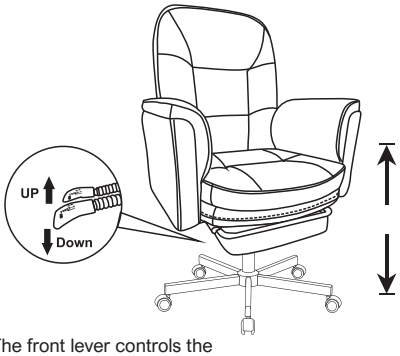


The front lever controls the seat height adjustment.



(Rear lever) Pull up: Unlock the backrest for reclining

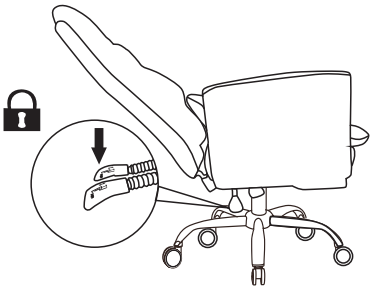

(Rear lever) Pull down: Lock the backrest

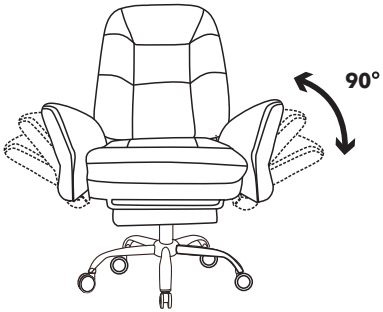

The armrest needs to be fully folded inward before it can be unlocked and opened outward. The maximum folding angle of the armrest is 90 degrees.

Limited Warranty

Your satisfaction is our priority. We warrant that your chair will be free from defects in materials and workmanship for one (1) year from the date of the original purchase. If a defect is found during the warranty period, we will repair or replace the product at our discretion.

SAFETY INFORMATION



Sit in the center of the chair,with your back to the backrest



Do not sit at the front edge of the chair



Do not stand on the chair



Do not use the chair with more than one person



Do not push the chair around when a person is sitting in it



Do not push down on the backrest when a person is reclined



Do not place all your weight on the backrest only

EXCLUSIONS:

This warranty does not apply and no other warranty applies to:

- Normal wear and tear, which are to be expected over the course of ownership.
- Misuse, abuse or excessive use of the product.
- Modifications or attachments to the product that are not approved by us.
- Products that were not installed, used, or maintained in accordance with product instructions and warnings.
- Products used for rental or commercial purposes.
- Damage caused by the carrier in-transit is handled under separate terms.

service@vostrylen.vip

SAVE THESE INSTRUCTIONS