


Assembly Instruction Sheet for Model HL371738

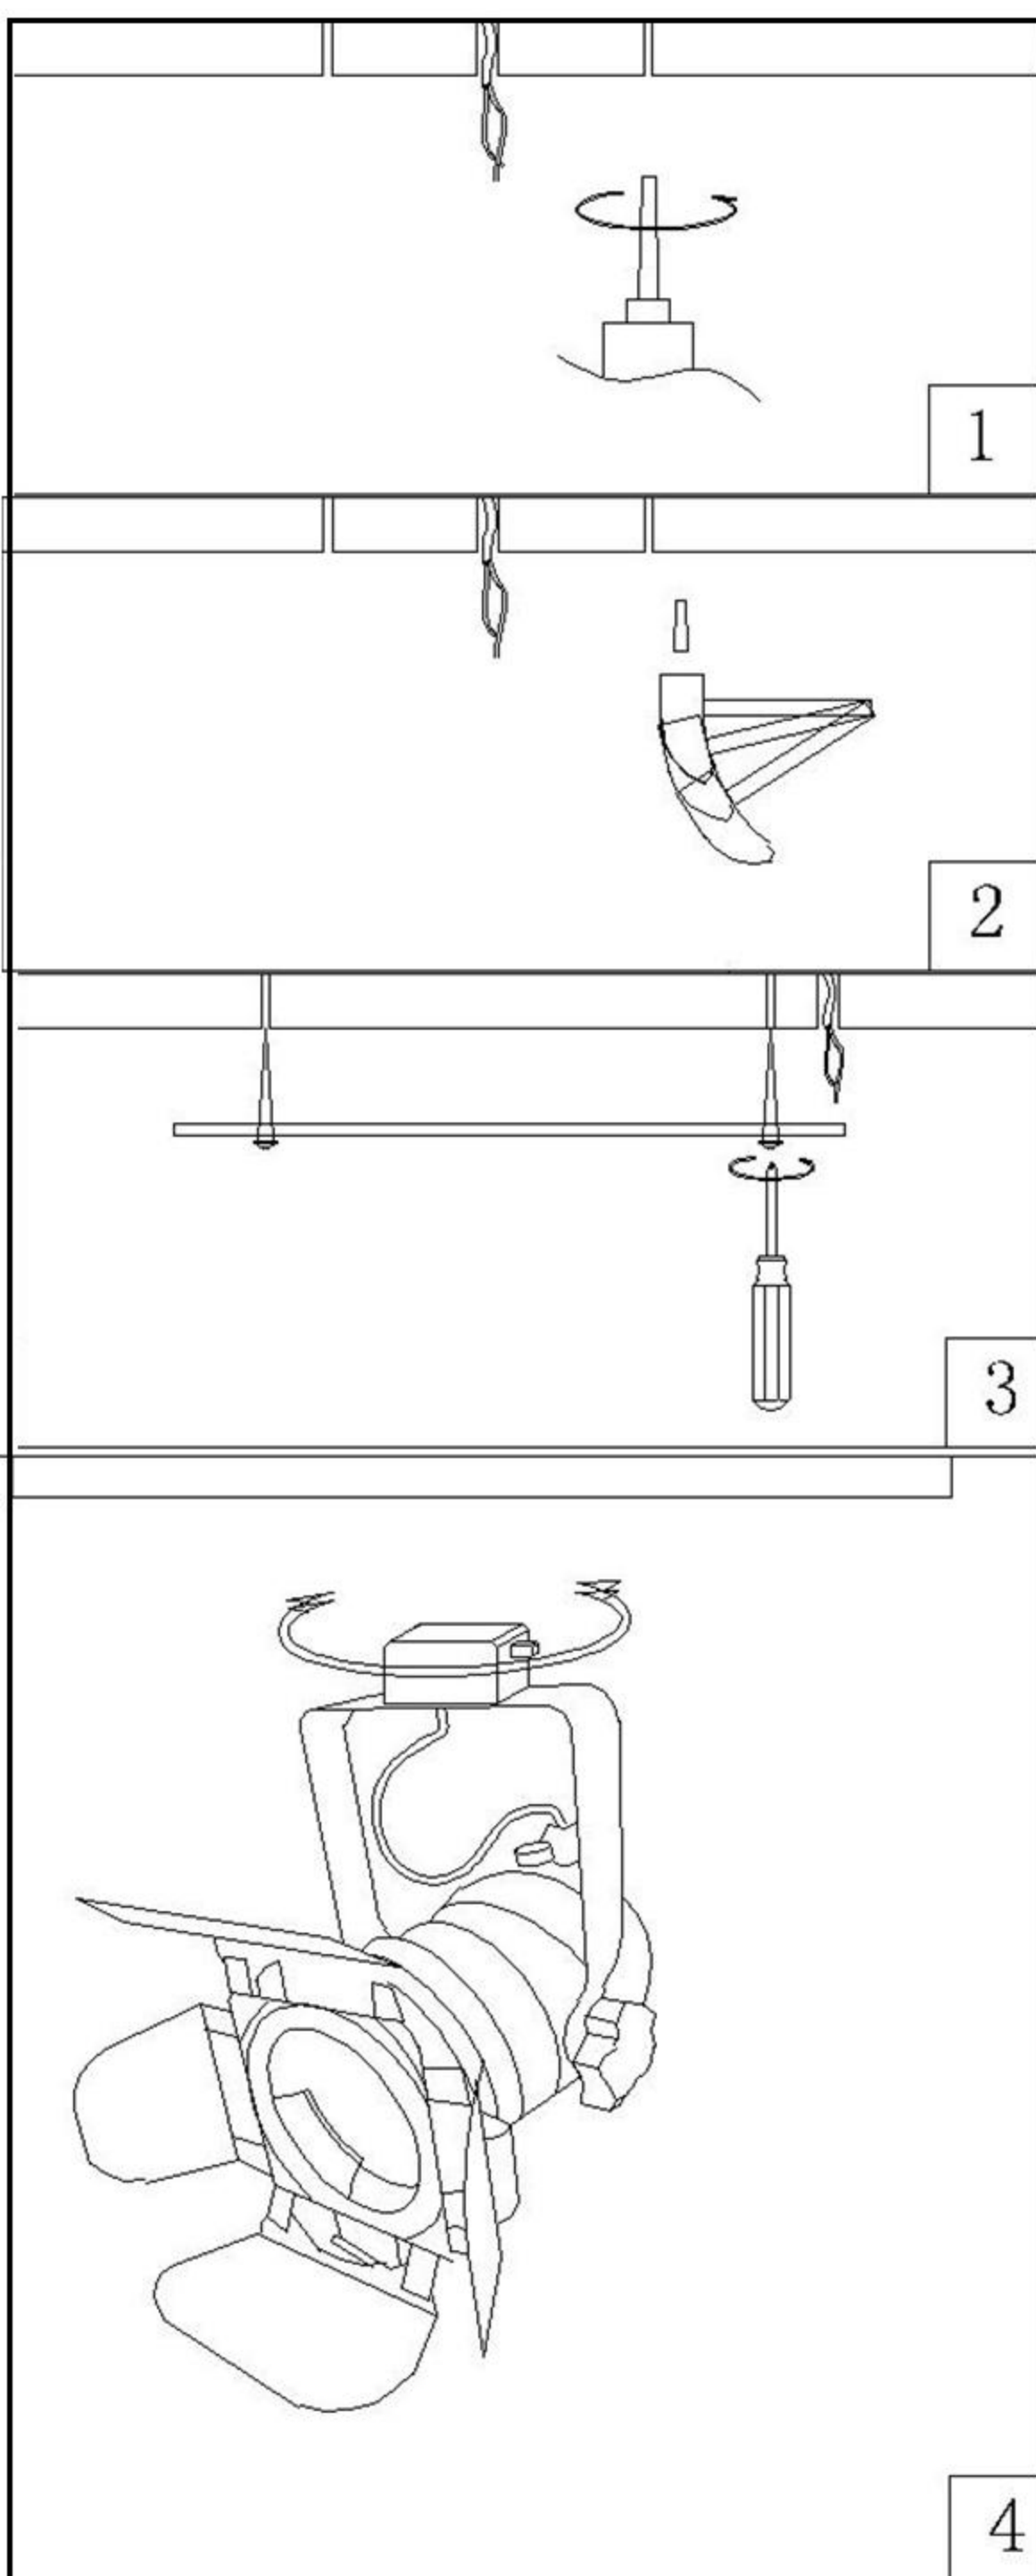

STEP 1 (Included 1/2/3)

Remove the Mounting Bracket from the Canopy.
Mark the drilling position on ceiling with the help of the Mounting Bracket.
Drill holes on the marks and stick the expansion anchors into the holes.
Fix the Mounting Bracket to the expansion anchors with self-tapping screws.

STEP 2 (Included 4)

Hold the Fixture close to the ceiling.
Connect live line to wire color Black/Red from the canopy of Fixture.
Connect neutral line to wire color White/Blue from the the canopy of Fixture.
Attach the canopy of Fixture to the ceiling.

Your fixture is now assembled and ready to use.

WE SUGGEST THE LAMP TO BE INSTALLED BY A
LICENSED ELECTRICIAN.

Voltage:

110V-240V, Bulb Base Type: E26/E27. ♂

2. All wires are connected. When unpacking, be
careful not to pull with wires as a bad
connection may result. ♂

3. Do not connect electricity until your
fixture is fully assembled. ♂

4. To reduce the risk of fire, electrical shock,
or personal injury, always turn off and unplug
fixture ♂ and allow it to cool prior to
replacing light bulb. ♂

5. Do not touch bulb when fixture is turned on
or look directly at lit bulb. Keep flammable
♂materials away from lit bulb.