

5" UNIVERSAL ROUND UTILITY/ CLOSET LIGHT

WITH PIR OCCUPANCY SENSOR | 665 LM | 97 LPW

KEY FEATURES

5IN Universal Round Utility / Closet Light with Sensor is small, compact, and powerful. This utility fixture is also super-convenient with a built-in PIR occupancy sensor for hands-free performance.

- Great for tight spaces—4.72" width and 1.76" profile height
- Integrated PIR motion sensor with 3 hold times: 1 min, 5 min, disable (Control using switch on luminaire)
- Maximum sensing angle: 100°
- Closet Rated
- Light weight, ~ 1/4 lb.

SPECIFICATIONS

Construction

- Cold-rolled steel with white finish

Light Quality

- 4000K, 80+ CRI

Optics

- Impact-resistant frosted PC diffuser lens for zero pixelation and overall visual comfort
- Uniform, even light distribution

Installation and Function

- Hard Wire:
Mounting hardware and quick connectors included


Electrical

- >72,000 hour LEDs at L70 for reduced maintenance
- Operates at 120V, 60Hz
- Operating temperature: -20°C (-4°F) / 45°C (113°F)
- Non-Dimmable

* Always consult dimmer manufacturer for proper use, installation and compatibility (some dimmers may require a neutral in the wall box).

Warranty

5-Year Standard Warranty.

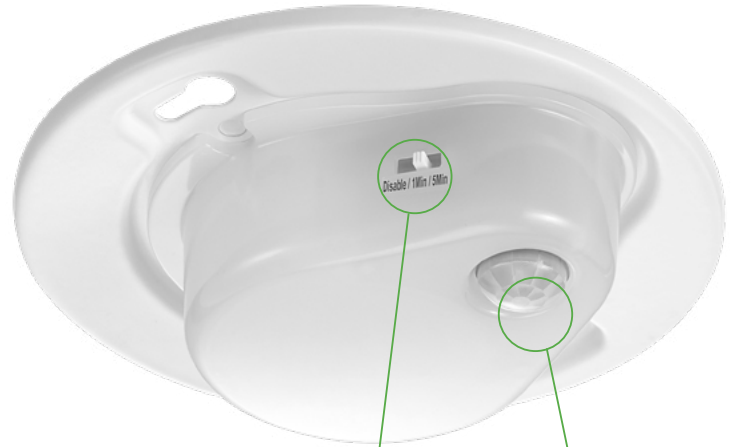

3 Hold Times:

1 min
5 min
disable

Integrated PIR Motion Sensor



**100°
MOTION
SENSOR**



Certifications & Test Data

- All luminaires are built to UL 1598 standards and have the appropriate UL labels and information on product
- Damp location rated
- ENERGY STAR® rated (See Page 2 for search info.)
- Driver rated for FCC part 15 Class B for use in residential or commercial applications
- Suitable for use in closets when installed in accordance to NEC Section 410.16 (A)(1) and 410.16 (C)(1)



5" Universal Round Utility/Closet Light WITH PIR OCCUPANCY SENSOR

CATALOG LOGIC


Series	5IN	650LM	8	40K	SV	N	WT	OS
Series	Size	Lumens	CRI	CCT	Voltage	Dimming	Finish	Sensor
5" Universal Round Utility / Closet Light	5IN (5" Dia)	(Lumen Package) 650LM	8 80CRI (min.)	40K 4000K	SV Single-Volt 120V	N Non-Dimmable	WT White	OS PIR OC Sensor

STOCK ORDERING INFORMATION

Catalog Part Number	Order Number	Size (Dia)	Case QTY	Lumen Package	Delivered Lumens ²	Wattage (Nominal)	Efficacy	CCT	CRI	Voltage	Dim	ENERGY STAR®
		5"	6	650	665	7	97	4000K	80 (min)	120V	Non-Dim	Search: Catalog Part#

Notes: 1. For more delivered lumens and test data see below, or visit ETISSL.com

DIMENSIONS / DETAILS

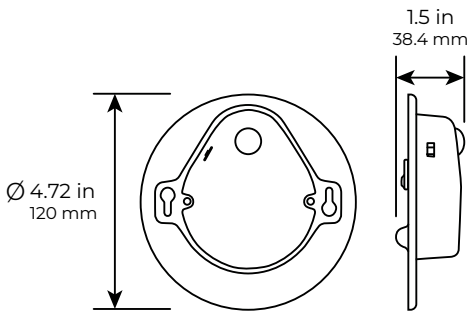

Unit Weight
.26 lbs.

Included Hard-Wire Mounting Kit:




PHOTOMETRIC SAMPLE

Luminaire Data:

CCT & CRI	4000K, 80+ CRI
Delivered Lumens	665
Wattage	6.85W
Efficacy	97
Beam Angle	50%=109° 10%=120°
Spacing	0° = 1.22 90° = 1.20

Photometric values based on tests performed in compliance with LM-63 & LM-79

Candela Plot



109°

PERFORMANCE / DATA

Lumen Maintenance

Ambient Temp.	TM-21 Lumen Maintenance (54,000 hours)
25° C (77° F)	88.88%
Ambient Temp.	TM-21 Theoretical L70 (hours)
25° C (77° F)	> 72,000

Load Information

Power Factor	.90
THD	< 20%
Frequency	60 Hz
Low Temp Start / Max Temp	-20° C (-4° F) / 45° C (113° F)