

TOTO®

CST744EL Eco Drake® Close Coupled Toilet, 1.28 GPF



CST744EL - Eco Drake® Close Coupled Toilet with SS114 - SoftClose Seat



E-Max® Technology: Quiet, powerful, commercial grade flushing performance.



Choose a SoftClose® toilet seat, or upgrade to a Washlet.



Standard 2" flush valve Wide 3" flush valve

Fast Flush: New, wide 3" flush valve is 125% larger than conventional 2" flush valves.



Certified by IAPMO R&T

- Contemporary, high profile design
- ADA Compliant
- E-Max® Technology
- Powerful, quiet flush every time
- Wide, 2-1/8" computer designed trapway
- Large water surface

High profile, ADA compliant close coupled toilet. Low consumption (1.28 Gpf/4.8 Lpf) siphon jet flushing action.

Tank cover, fittings, chrome plated trip lever, less seat.

■ **CST744EL**

Elongated, 12" rough-in, less seat

□ **C744EL**

Elongated bowl only, 12" rough-in.

□ **ST743E**

Drake tank and cover only. Complete with tank trim and coupling components.

□ **ST743ER**

Drake tank and cover only. Complete with tank trim and coupling components. Right hand trip lever.

□ **SS114**

SoftClose®: Seat and lid gently close with a touch of a hand. Elongated, closed front seat with lid.

□ **SC134**

Elongated, open front seat with lid.

□ **SC534**

Elongated, open front seat less lid.

Colors:

Standard #01 Cotton, #11 Colonial White
#12 Sedona Beige, #03 Bone
#51 Ebony

Trip Lever:

Standard #CP Chrome Plated

Optional See price book for additional finishes

TOTO USA, Inc. recommends the use of a nationally listed, double sanitary tee-wye only, in vertical waste stacks, in accordance with the stipulations noted in the majority of nationally recognized plumbing codes.

 ADA Compliant

For installation condition with approach from the left hand side.

CST744EL

Eco Drake® Close Coupled Toilet, 1.28 GPF

■ PERFORMANCE

The TOTO® E-Max® low consumption toilets received high ratings during ANSI/ASME and CSA testing at independent laboratories. Designed with a powerful siphon jet flushing action, the toilet offers a large water surface and a glazed trapway.

■ SPECIFICATIONS

Water Use: 1.28 Gpf / 4.8 Lpf
 Flush System: Gravity Feed (E-Max® System)
 Min. Water Pressure: 8 psi
 Water Surface: 10-3/8" x 8-1/4"
 Trap Diameter: 2-1/8"
 Rough-in: 12" rough-in
 Trapseal: 2-3/8"
 Acoustic Reading: 65-70dB (may vary depending on room construction)
 Warranty: One Year Limited Warranty
 Material: Vitreous china

Shipping Weight: **C744EL** 56.5 lbs.
ST743E 35 lbs.

Shipping Dimensions: **C744EL** 29-1/2"L x 16"W¹
 x 10-1/4"W² x 18-1/2"H
ST743E 20-1/8"L x 8-1/4"W
 x 15-1/2"H

Fixture dimensions and hydraulic performance meet or exceed ANSI/ASME standard A112.19.2 and CAN/CSA B 45 requirements.


Listing and approval: IAPMO/c-UPC, CSA, City of Los Angeles, State of MA, and others.



Meets the American Disabilities Act Guidelines and ANSI A117.1 requirements where installed so top of seat is 17"-19" from the finished floor. For installation condition with approach from the left hand side. Recommended seat: SS114

These dimensions and specifications are subject to change without notice.

U.S. Patent: D406.329 5.918.325
 5.983.413 and pending

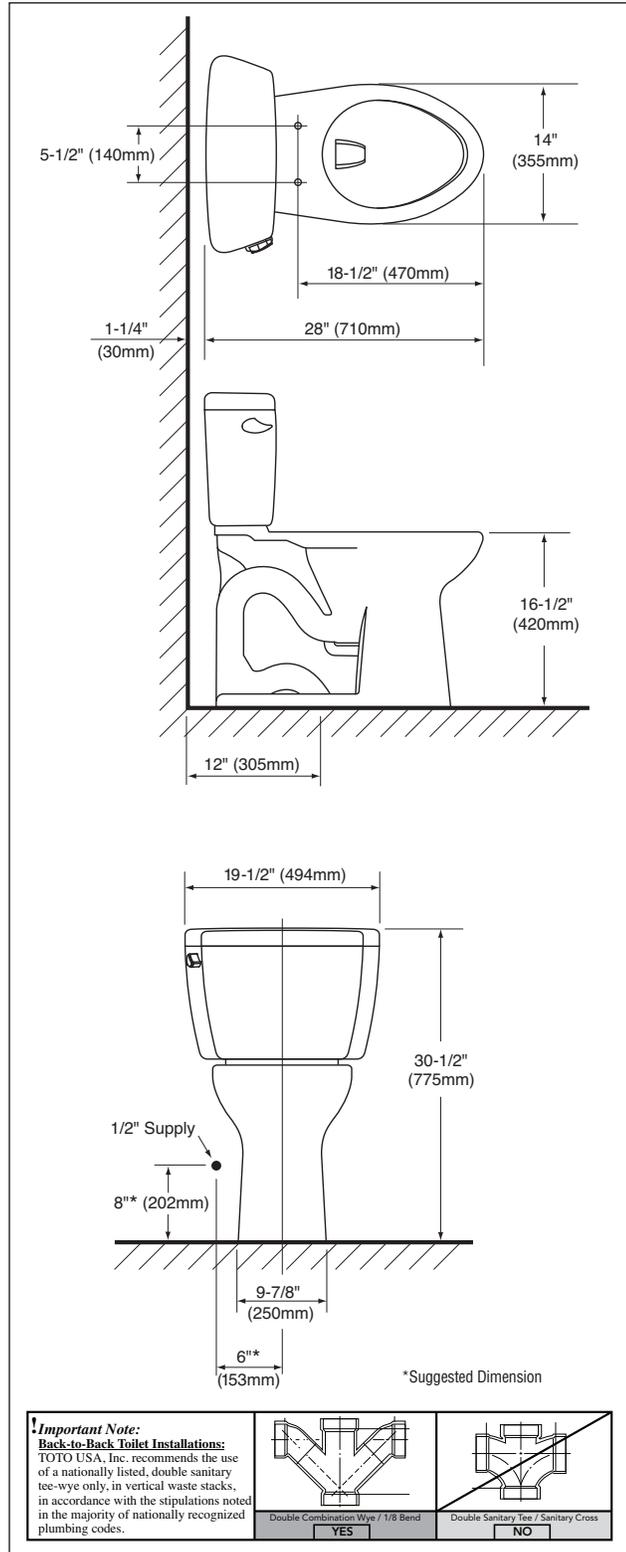

CST744EL - Eco Drake® Close Coupled Toilet

TOTO®

TOTO U.S.A., INC. • 1155 Southern Road, Morrow, GA 30260
 Tel. (888) 295-8134 • Fax. (800) 699-4889 • www.totousa.com
 Printed in U.S.A. © TOTO LTD. 03/07 #A10360

Printed on recycled paper

REV 03/09