

Installation Instruction



Mirror Function

☺ Brightness&Temperature Adjustment ----- The first short press after the mirror is turned on can adjust the color temperature to 3000K, the second short press adjusts it to 4500K, the third short press adjusts it to 6000K, and the long press can adjust the brightness.

☺ Anti-fog ----- Touch this button to open anti-fog function, and this function will automatically turn off after one hour.


Memory Function ----- When you turn on the mirror again, the brightness&temperature will be the brightness&temperature you set last time.

Accessories List

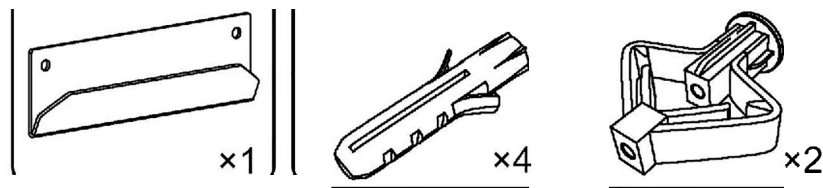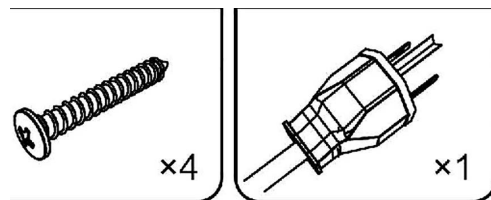

Installation Method

step1



Measure and mark location

step3




Apply wall anchors with hammer

step5



Hang the mirror on the wall


option1



Insert the plug into the socket, keep the voltage between 110v


After hanging the mirror securely, plug the power cable to a standard circuit panel.

step2



Use the electric drill to punch holes


step4




Use a screwdriver to screw the screws into the wall anchors

Black wire----- power supply L (LIVE)
White wire----- power supply N (NEUTRAL)
Green wire----- power supply E (EARTH)

110V



option2



or

Hardwired: Connect the wire behind the mirror to the reserved power cord in the wall and link it according to the color of the wire.