

Faucet Installation Instructions

ANZZI™

KF-AZ198CH
KF-AZ198BN
KF-AZ198ORB

SINGLE HOLE LAVATORY FAUCET
SOLID BRASS
CERAMIC CARTRIDGE
FLOW RATE: 1.2GPM
LIMITED LIFETIME WARRANTY:


HAVE QUESTIONS?

Call us at 1-844-44-ANZZI or visit www.ANZZI.com

PREPARATION



MAKE SURE TO SHUT OFF THE WATER FLOW
FROM YOUR HOT AND COLD SUPPLY LINES.

MAKE SURE YOUR MOUNTING HOLE IS CUT TO
SIZE.





ITEMS YOU MAY NEED.

NEED HELP? Give us a call at 1-844-44-ANZZI or
visit us online at www.ANZZI.com.

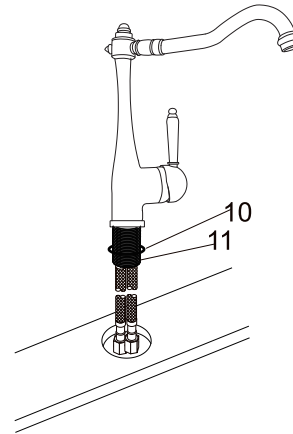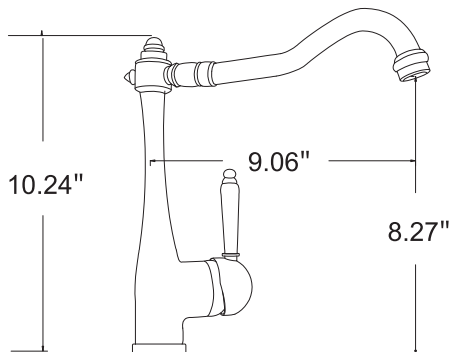

STEP 1

Place O-ring (10) onto the pipe (11)
before lowering the pipe through the mounting hole.

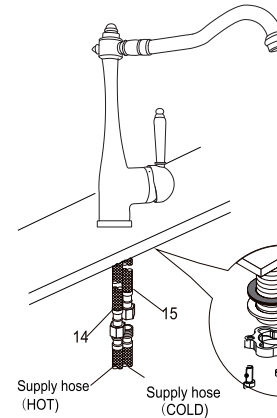



STEP 2

Fix the lock nut (13), metal washer (18) and rubber
washer (12) onto the pipe. Tighten the screws (19)
to secure. Do not overtighten.

STEP 3

Attach your hot and cold supply lines to the faucet.

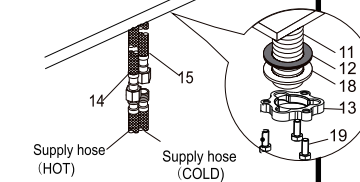

STEP 4

Open the hot and cold supply lines. Take this time to
check for leaks. Turn the faucet handle for one and
allow the water to flow for one minute to remove
any debris from the faucet's interior.

ENJOY!