




CAST ALUM. CLUB CHAIR




PARTS LIST

A	B	C	D
			
Back 1 PC	Seat 1 PC	Left Side Frame 1 PC	Right Side Frame 1 PC


HARDWARE LIST

1	2	3	4	5
				
Phillips Head Bolt (M6*30) 4 pcs	Spring Washer (M6) 4 pcs	Flat Washer (M6) 4 pcs	Nut (M6) 4 pcs	Nut Cap (M6) 4 pcs
6	7	8	9	10
				
Bolt (M8*30) 4 pcs	Spring Washer (M8) 4 pcs	Flat Washer (M8) 8 pcs	Nut (M8) 4 pcs	Nut Cap (M8) 4 pcs
11	12			
				
Wrench (M6 & M8) 1 pc	Bolt Cap (M8) 4 pcs			

Step 1: Attach Side Frame (C & D) to seat (B) With Bolts (Part #6), Flat Washers (Part #8), Spring Washers (Part #7) & Nuts (Part #9).Note - Do not tighten Nuts (Part #9) fully at this time.Cover M8X30 mm bolts (Part #6)with bolt caps (Part #12).

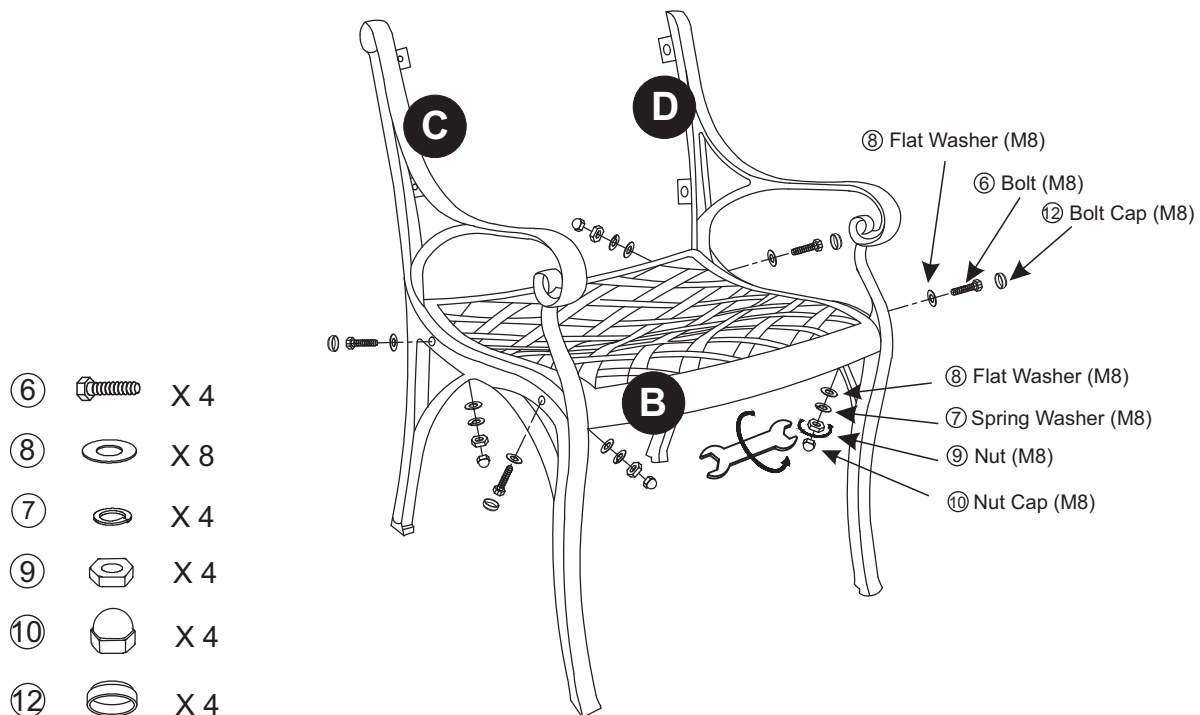

Step 2: Attach Back (A) to unit with Phillips Head Bolts (Part #1), Flat Washers(Part #3), Spring Washers (Part #2), and Nuts (Part #4). Tighten all bolts of the chair completely. Cover all Nuts with Nut Caps (Part #5).

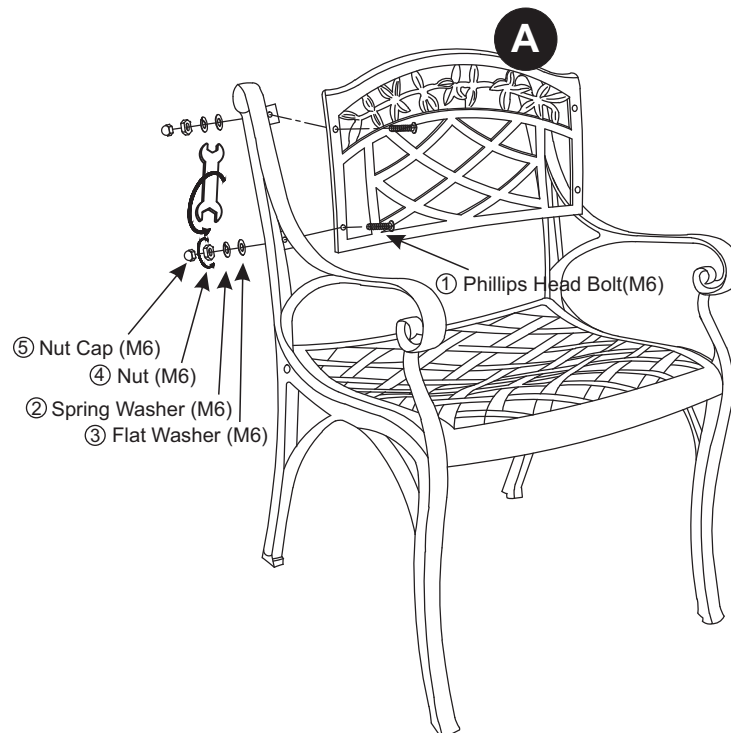

- ① Phillips Head Bolt (M6) X 4
- ③ Flat Washer (M6) X 4
- ② Spring Washer (M6) X 4
- ④ Nut (M6) X 4
- ⑤ Nut Cap (M6) X 4