


# GROUND LIFT AND TILT TABLE, ZLTT-5252-4-36

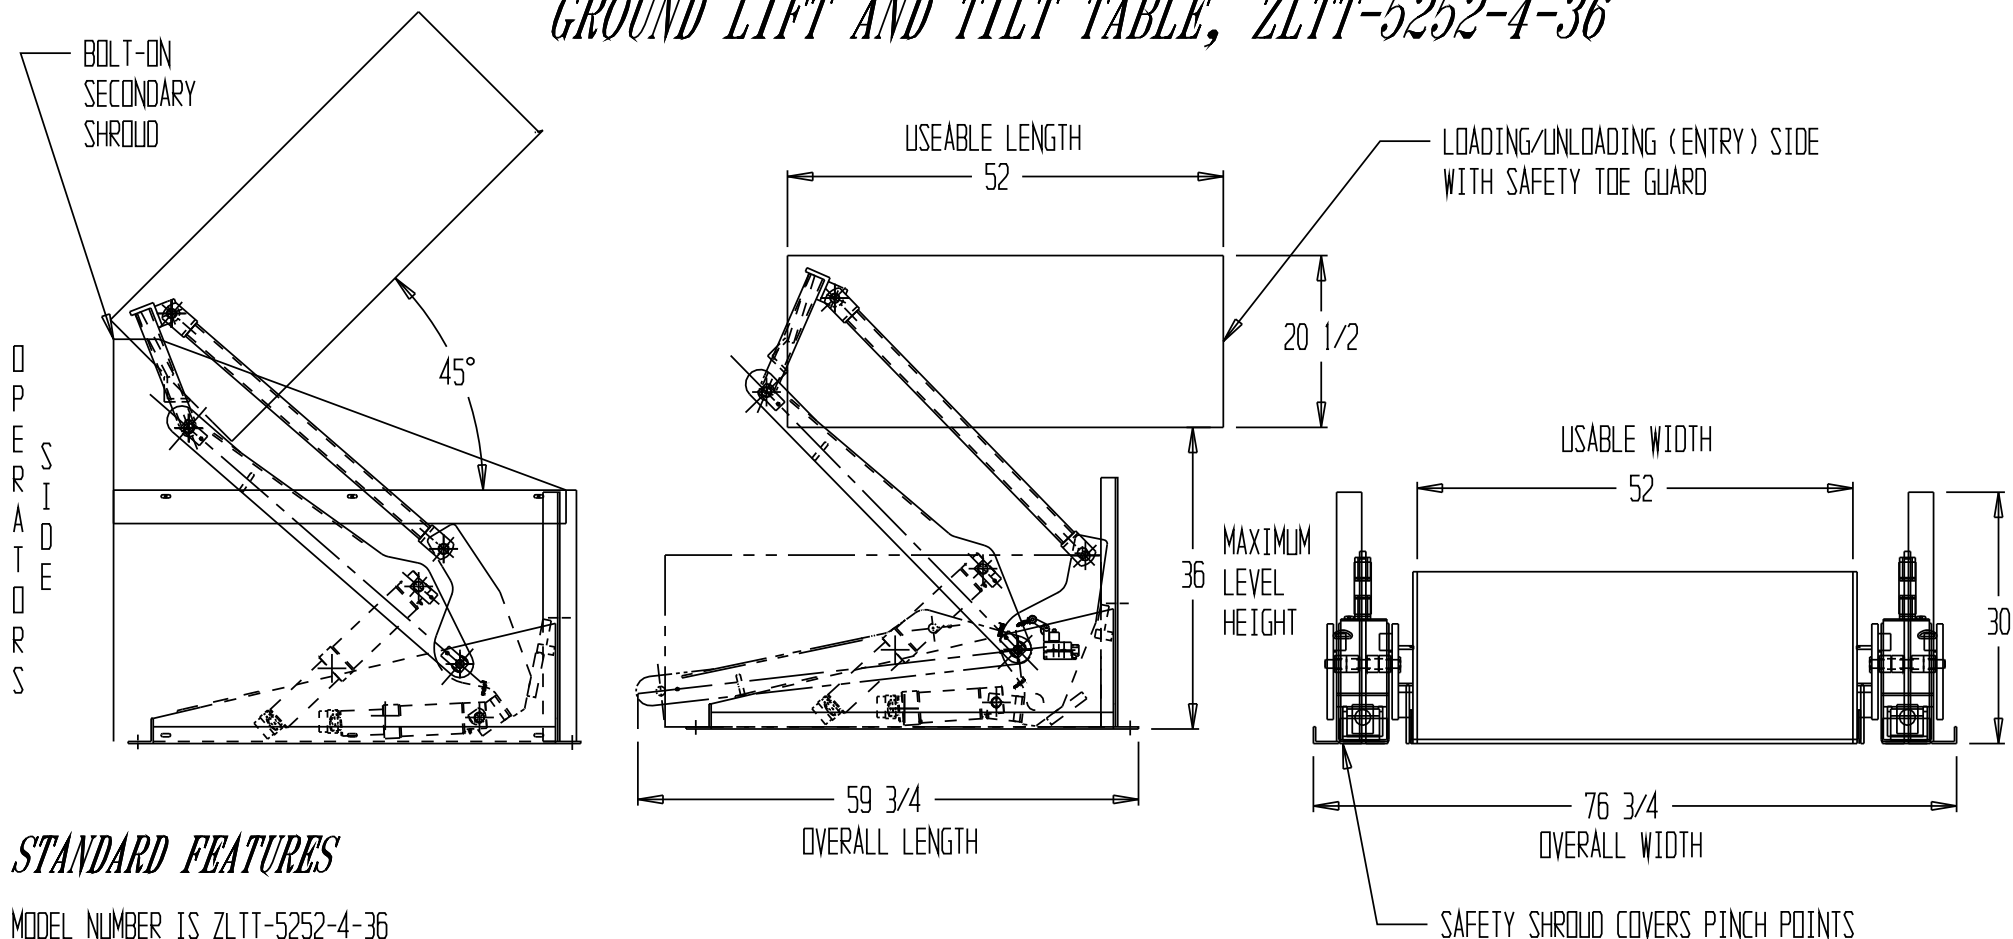

## STANDARD FEATURES

MODEL NUMBER IS ZLTT-5252-4-36  
 USABLE WIDTH IS 52 INCHES  
 USABLE LENGTH IS 52 INCHES  
 CAPACITY IS 4,000 POUNDS (EVENLY DISTRIBUTED LOAD)  
 LOWERED HEIGHT IS 1/2 INCH WITH BEVELED ENTRY  
 MAXIMUM LEVEL HEIGHT IS 36 INCHES  
 MAXIMUM TILT ANGLE IS 45 DEGREES  
 OVERALL WIDTH IS 76 3/4 INCHES (USABLE PLUS 24 3/4 INCHES)\*  
 OVERALL LENGTH IS 59 3/4 INCHES (USABLE PLUS 7 3/4 INCHES)\*  
 24V CONTROL IS STANDARD HAND HELD ON 8 FOOT CORD  
 SAFETY TOE GUARDS ON FRONT (LOADING SIDE) OF DECK  
 PAINTED BLUE

## PLEASE CIRCLE SPECIFICATIONS:

POWER	AC	DC (12V)	AIR/OIL
MOTOR VOLTAGE	115	208	230
DEDICATED CIRCUIT REQUIRED			
MOTOR PHASE	SINGLE	THREE	
CONTROL	HAND	*FOOT	
BATTERY CHRG.	REMOTE	ON-BOARD	
CHRG. INDICATOR	YES	NO	

FOR INTERNAL USE ONLY  
 PROJECT SIGN OFF

SALES  
 ENG  
 FAB.  
 POWER

**A P P R O V A L**

I, THE UNDERSIGNED, AGREE THAT THE PRODUCT AS REPRESENTED SATISFIES DESIGN & DIMENSION REQUIREMENTS. I ALSO ACKNOWLEDGE MY DUTY TO CONFIRM PRODUCT & INSTALLATION COMPLIANCE WITH ALL APPLICABLE FEDERAL, STATE AND LOCAL REGULATIONS & STANDARDS.

**ALL SPECIAL UNITS ARE NON-RETURNABLE**

[ ] As drawn [ ] As marked

Signed: \_\_\_\_\_ Date: \_\_\_\_\_

LEAD TIME WILL START UPON RECEIPT OF SIGNED APPROVAL DRAWING

Any additions, deletions or omissions must be corrected on this drawing, as this drawing will be considered all inclusive.

All graphics provided are for reference only. If certain dimensions are critical please verify those dimensions with your salesperson

DISTRIBUTOR'S NAME: **VESTIL MFG**

P.O.#: \_

W.O.#: \_

SALES: \_

DRWG./FILE NAME: 04-007-031-001

DATE: \_

SCALE: \_

QUOTE #: \_

QUOTED LEADTIME: \_