

PRODUCT FEATURES

- Indirect light source that pushes the light up
- Inside of shade is sandblasted and spun to reach 3mm in thickness
- Ships with (4) 12" and (2) 6" rigid stems in coordinating finish.
- Fully dimmable integrated LED lamp
- Modern finishes available

LAMPING

Includes 15.7 watts, 40 total delivered lumens, 2700K LED modules. Dimmable with most LED compatible ELV, Triac and 0-10V dimmers. Ships with (4) 12" and (2) 6" rigid stems in coordinating finish. 120V-277V. Sloped ceiling compatible up to 22.5°.



Blackened Bronze



Blackened Bronze Natural Brass

ORDERING INFORMATION

AKPD170	COLOR TEMP	FINISH	
	27 2700K	BZ	DARK BRONZE
		BZ/DB	DARK BRONZE/DARKENED BRASS
		NB	NATURAL BRASS
		N	POLISHED NICKEL

AKPD170

JOB NAME


NOTES

Saucer Large Pendant

Visual Comfort & Co.

Specifications

PRIMARY MATERIAL	Steel Or Brass
SHADE MATERIAL	Steel Or Brass
NET WEIGHT	17 lbs
HEIGHT	6in
WIDTH	18in
LENGTH	18in
WET LISTED	
DAMP LISTED	
DRY LISTED	
GENERAL LISTING	ETL Listed
INCLUDES	

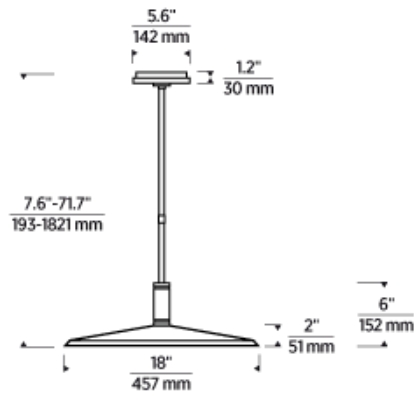

Lamping Specifications

	LED LAMP	INTEGRATED LED	NON LED	NO LAMP
DELIVERED LUMENS		40		
WATTS		15.7		
MAX WATTAGE PER BULB		15.7W		
		Universal 120V-277V 0-10, ELV, TRIAC		
CCT		2700K		
CRI		90 CRI		
LED LIFETIME				
L70		>50000		
AVERAGE BULB HOURS				
FIELD SERVICEABLE LED				
LAMP BASE		Integrated LED		
LAMP SHAPE		Integrated LED		
LAMP INCLUDED?		True		
WARRANTY**		5 Years		

* Dimming information available at www.techlighting.com/Downloads#dimming

** Visit techlighting.com for specific warranty limitations and details.

T20 / T24 / JA8 INFORMATION

	Integrated LED	Replacement LED Lamp	No Lamp *
This product can be used to comply with California Building Energy Efficiency Standards 2016 Title 24 Part 6 / JA8.	No		
This product can be used to comply with California Appliance Efficiency Standards 2016 Title 20 and may be shipped to and sold in California.			

* If a light fixture or component does not include a lamp or light source, it is the responsibility of the customer to select a lamp that meets the T24 and T20 requirements.

