


Assembly Instruction

CAUTION: Read instruction carefully and turn electricity off at main circuit breaker panel before beginning installation.

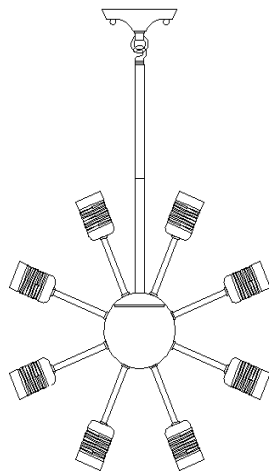

Care and Cleaning



To clean the outside of the fixture, use a dry or slightly dampened clean cloth(use clean water, never a solvent)to wipe the surface of the fixture.

To clear the inside of the fixture, first disconnect power to the fixture by turning off the circuit breaker or by removing the fuse at the fuse box. Next, use a dry or slightly dampened clean cloth(use clean water, never a solvent) to wipe the interior surface of the fixture

Do not use any cleaners with chemical, solvents or harsh abrasives. Use Only a dry soft cloth to dust or wipe carefully.

Estimated Assembly Time:30 minutes


Part List and Hardware List

PIECE	DESCRIPTION	PICTURE	QUANTITY	PIECE	DESCRIPTION	PICTURE	QUANTITY
A	mounting bar		1X	D	Tube with Hanger		X1
A1	Machine screw		2X	E	Tube		X1
B	Canopy		1X	F	Lamp Body		X1
C	Screwed ball		2X	G	Bulb		X12

Installation


Step 1

- Unpack all parts from cartons carefully
- Secure tube (E) into the lamp body (F)
- Secure tube (D) into the lamp body (E)
- Hang the tube(D) into the ring of canopy(B)
- Installing the mounting bar(A) with screws(A1) to the outlet box

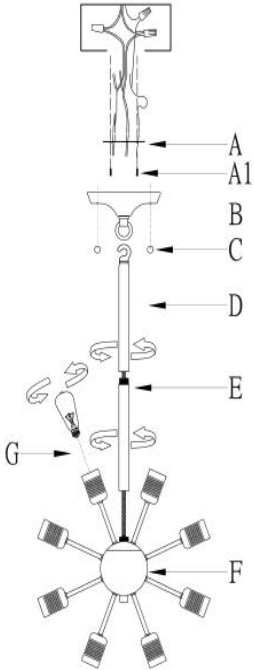

Step 2 Wire connection

Connect,Hot,Black or Red outlet Supply Wire to:	Connect,Neutral,White Outlet Supply Wire to:
Black	White
*Parallel Cord(round&smooth)	*Parallel Cord(square&ridged)
Clear,Brown,Gold or Black without Tracer(colored stripes)	Clear,Brwn,Gold or Black without Tracer(colored stripes)
Insulated Wire(not green)with copper metal conductor	Insulated Wire(not green)with Silver metal conductor




*Note: When parallel wire(SPTI&SPTII)is used. The neutral wire is square shaped and ridged and the hot wire will be round in shape and smooth.(See illustration on left)

- Grounding Instructions:
- a) For installation in the United States: Wrap ground wire from outlet box around green ground screw (F) on mounting bracket, no less than 2" from wire end. Tighten ground screw. If fixture is supplied with a ground wire, connect to outlet ground wire with a wire connector.
 - b) For installation in Canada: If fixture is supplied with ground wire, wrap ground wire around green grounding screw on mounting bracket. Tighten ground screw.

Step 3

- Orient the ceiling canopy so that the mounting screws protruding from the mounting bracket go into the holes in the canopy, then secure it with the provided screwed ball (C).
- Install bulbs (G). Be sure to use bulb with wattage no greater than specified on this fixture

**PLEASE USE ON/OFF EDISON BULB MAX 40-WATT
OR CFL BULB 9-WATT.
THERE ARE 12PCS 25-WATT EDISON BULBS IN THE BOX.**

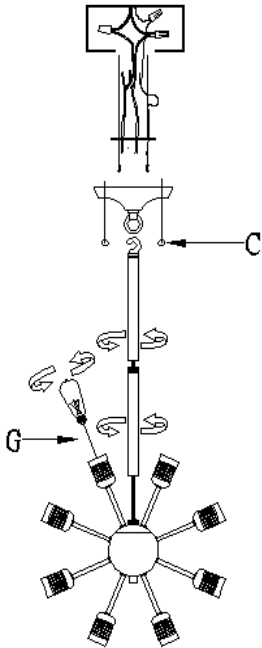

Step 4

- Consult a qualified electrician to ensure correct branch circuit conductor

ENJOY YOUR LAMP