



As the Picture shows,there is a Plastic Rubber in a Pole(A) . Please remove the Plastic Rubber before installation.

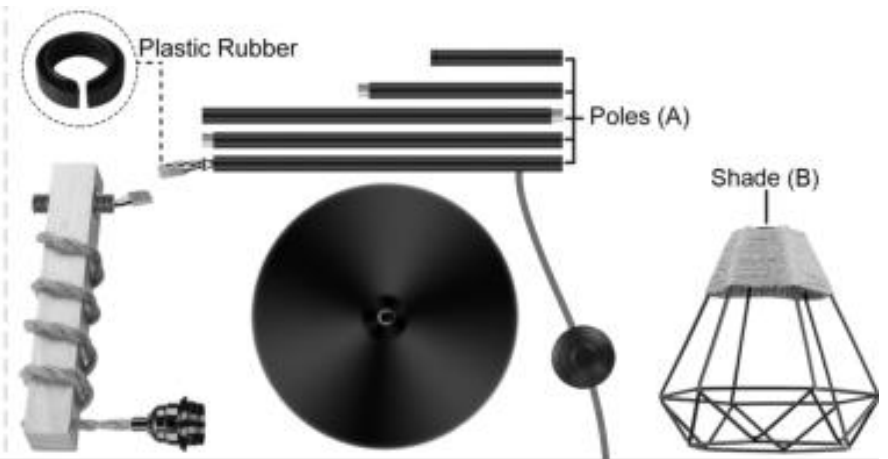

Installation

1. Run the wire through the Poles (A): [1], [2], [3], [4]. Then get the Poles(A) connected and secured.
2. Complete part [5] and [6].
3. Ref. [7], Pull out the cord from the bottom of the Pole.
4. Put on the Shade (B) to the Socket(C) and lock it by the Socket Ring(D).[8].
5. Install a Light Bulb(E27 Base, Max. 25W, Bulb is not included.)
6. Finish.[9].

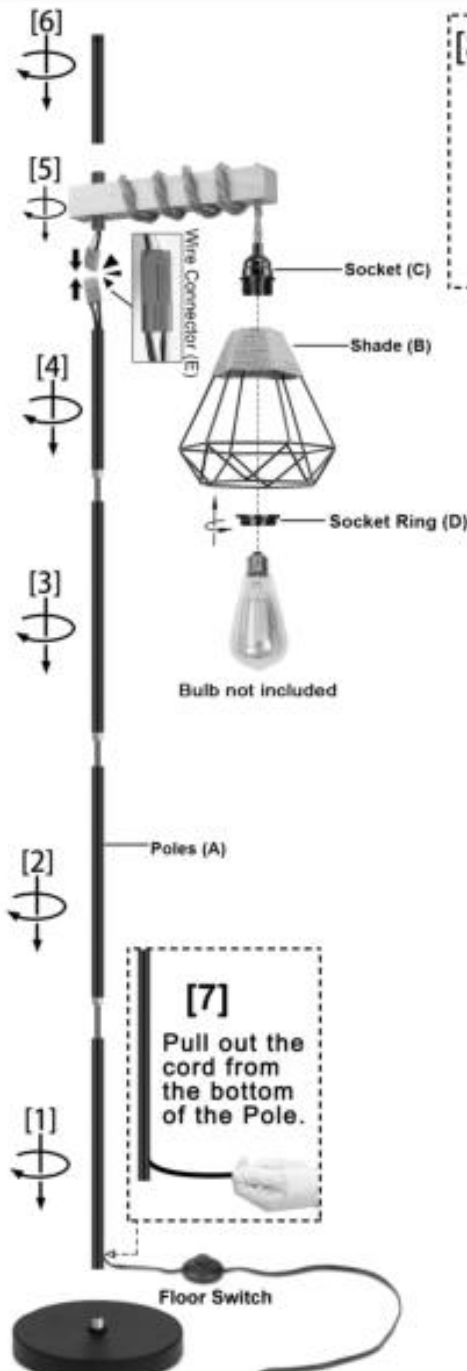

[8] Lock the Shade (B) to the Socket(C) by Socket Ring(D).
Note: The Socket Ring(D) should be on the Socket(C). Please remove Socket Ring(D) prior to installing Shade(B).

