



# Archer® | K-1123-LAW

60" x 32" alcove bath with Bask® heated surface, left drain

## Features

- Bask® heated surface creates spa-like relaxation with soothing warmth on your back, shoulders, and neck
- Three heat settings allow you to customize the surface temperature
- Comfort Depth® offers a lower apron with generous soaking depth
- Integral lumbar support
- Slotted overflow allows for deep soaking
- Integral apron
- Integral flange helps prevent water from seeping behind wall and simplifies alcove installation
- Textured bottom surface
- Coordinates with other products in the Archer collection



## Available Colors/Finishes

*Color tiles intended for reference only.*

- |    |          |
|----|----------|
| 0  | White    |
| 96 | Biscuit  |
| 95 | Ice Grey |



1-800-4KOHLER (1-800-456-4537)  
Kohler Co. reserves the right to make revisions without notice to product specifications.  
For the most current specification sheet, go to [www.kohler.com](http://www.kohler.com) USA or [www.kohler.ca](http://www.kohler.ca) Canada.  
7-30-2026 00:11 - US-CA

THE BOLD LOOK  
OF **KOHLER**®

## Codes/Standards

*ADA compliant when installed to the specific requirements of these regulations.*



CSA B45.5/IAPMO Z124  
ASTM E162  
ASTM E662  
UL 1795  
ADA  
ICC/ANSI A117.1  
UL Listed

## Technical Information

*All product dimensions are nominal.*

|                        |                                        |
|------------------------|----------------------------------------|
| Drain Location:        | Left                                   |
| Drain Hole Diameter:   | 2-1/4" (57 mm)                         |
| Minimum Flat for Door: | 2-9/16" (65 mm)                        |
| Basin Area, Bottom:    | 45-1/8" x 19-11/16" (1146 mm x 500 mm) |
| Basin Area, Top:       | 52-3/4" x 25-5/16" (1340 mm x 643 mm)  |
| Water Depth:           | 15" (381 mm)                           |
| Water Capacity:        | 58 gal (219.6 L)                       |
| Minimum Floor Load:    | 45 lbs/ft <sup>2</sup>                 |
| Weight:                | 80 lbs (36.3 kg)                       |

## Material

- Acrylic

## Recommended Products/Accessories

K-1491 Bath/whirlpool pillow, removable  
K-1601 Bath/whirlpool footstop, removable  
K-23726 Drain treatment  
K-23732 Tub & shower cleaner

## Required Products/Accessories

- K-7271 Slotted overflow brass bath drain
- or
- K-7272 Slotted overflow bath drain

## Required Electrical Service

One circuit required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI). Outside North America, this device may be known as a Residual Current Device (RCD).

Heated surface: 120 V, 15 A

## Electrical Component Ratings


Heated surface: 120 V, 0.5 A, 60 Hz, 65 W

## Warranty

*See website for detailed warranty information.*

KOHLER® Plastic Baths and Shower Bases Lifetime Limited Warranty|KOHLER® Hydrotherapy Components Five-Year Limited Warranty



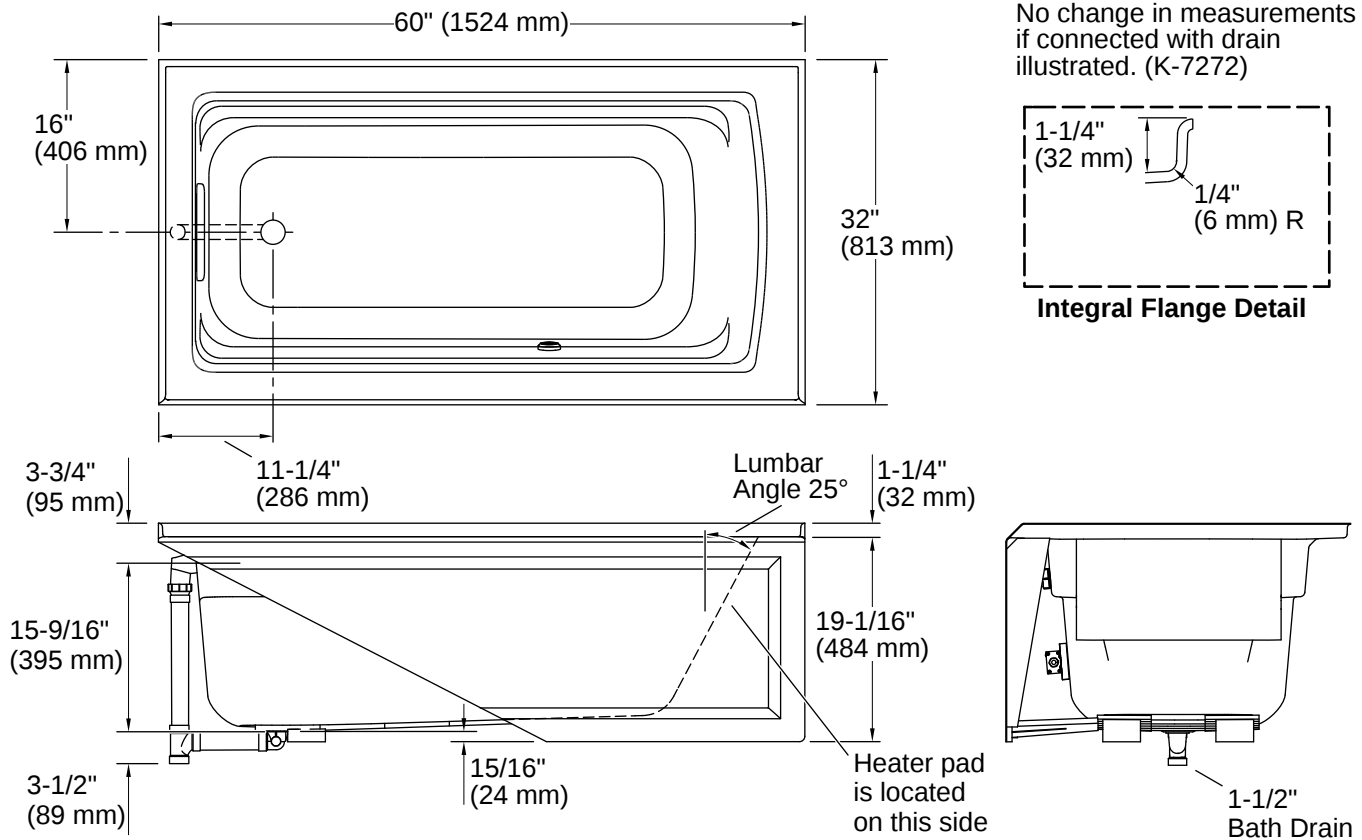

## Installation

- Left drain
- Requires Clearflo slotted overflow bath drain (sold separately)
- Alcove

## Installation Notes

*Install this product according to the installation instructions.*

Measure your actual product for rough-in details.

The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary.

ADA compliant when installed to the specific requirements of these regulations.



1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current specification sheet, go to [www.kohler.com](http://www.kohler.com) USA or [www.kohler.ca](http://www.kohler.ca) Canada.

7-30-2026 00:11 - US-CA