


USER MANUAL


CEILING FAN LIGHT

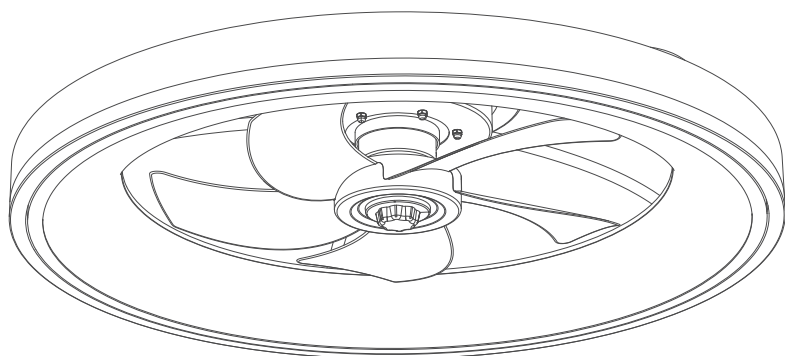

Important: Please read and understand this manual before any assembly. Before assembling this product, please ensure that all parts are in place. Compare the details with the product display presentation. If you have any questions, don't hesitate to contact us.

Remote control instructions:

1. Install AAA batteries (Battery not included) . If the remote control is not used for a long time, please take out the battery to prevent battery damage .
2. The remote control function is shown below .

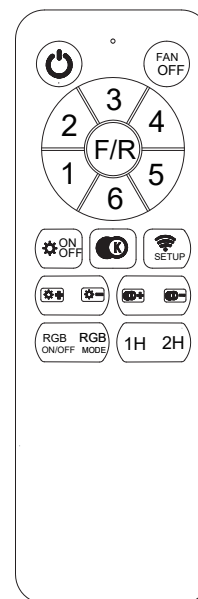

- SETUP: Turn on the power switch and the LED light will turn on. Press and hold the "Settings" button for 5 seconds, and the LED light will flash once, indicating successful pairing. If pairing is unsuccessful, disconnect the power for 5 seconds and then restart the operation
- ALLOFF General
- Fan on/off
- Three speed color temperature adjustment☒
- Turn off the lights and turn on the lights
- Long press or click on this key to increase the brightness
- Long press or click on this key to Reduce the brightness
- Long press this key to increase the color temperature
- Long press this key, the color temperature drops
- RGB lamp on/off
- RGB light mode switching
- Countdown > 1drop>1hour
- Countdown > 2drop> 2hour
- 1,2,3,4,5,6 Fan gear, 1 gear minimum wind 6 gear is the maximum wind
- The fan turns/reverses









Mobile phone APP control instructions:

App Operation



1. APP download: Scan the QR code and select the APP version to download.
2. Pairing: After turning off the power of the fan light, then turn on the power, click the "Pair" button on the APP within 5 seconds, and hear the beep, then the pairing is successful.
3. After the pairing is complete, you can control the device with the APP.

Note: APP connection method is Bluetooth.

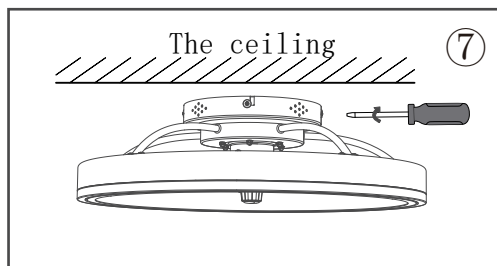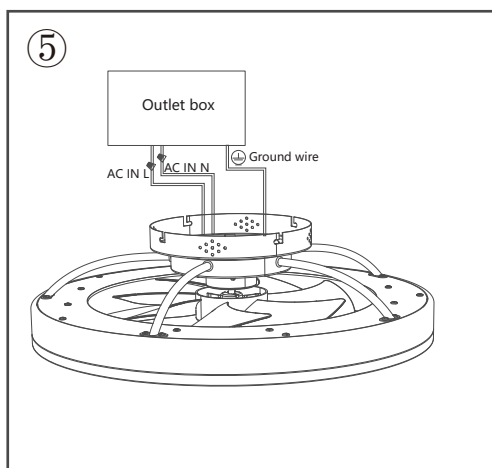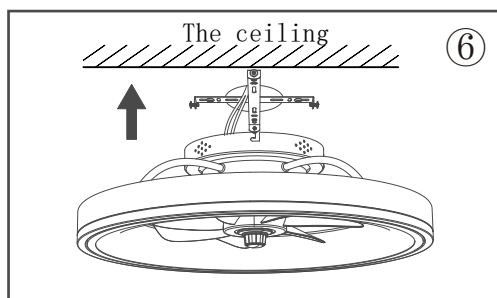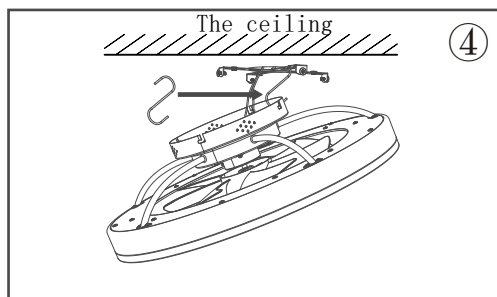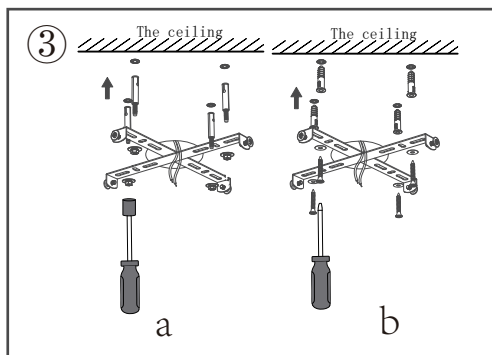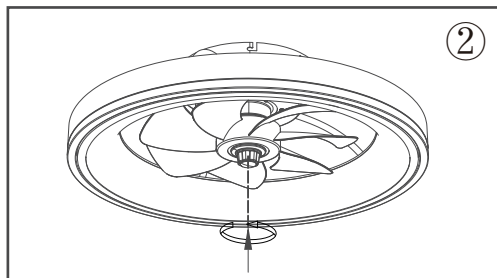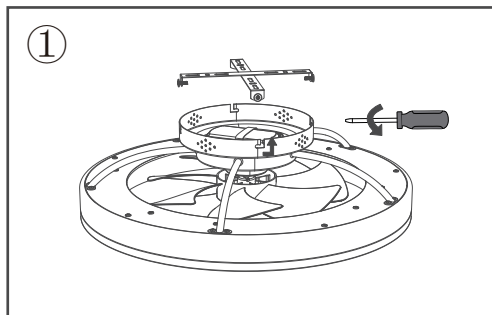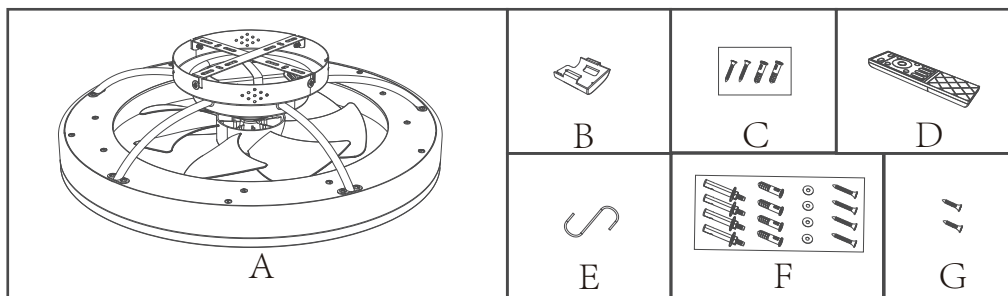

Preparations:

1.Prepare the required tools.

2.Turn off the switch.

3.Put all the parts in order.

Star-head Screwdriver	
Wire-stripping Pliers	
Stepladder	
Electrical Tape	

Installation procedure:

- 1.Twist the hanging plate clockwise and take it off from the ceiling fan light.
- 2.Tighten the part in a counterclockwise direction to make it firm.
3. a: If the roof is a wood ceiling, install the bracket as shown in picture A . Make sure the bracket is securely secured .
b: If the roof is a concrete ceiling, install the bracket as shown in picture B . Make sure the bracket is securely secured .
- 4.Hook one end of the S-shaped fitting to the light fixture and the other end to the bracket . Just like the picture .
- 5.a.Connect the black live wire marked "L" on the receiver to the live wire (typically black) on the outlet box.
b.Connect the white neutral wire marked "N" on the receiver to the neutral wire (typically white) on the outlet box.
c.Connect the ground wire (bare wire) from the base of the ceiling fan base with the ground wire (bare wire) of the outlet box.
6. Remove the S-shaped hook and turn the ceiling fan light clockwise on the hanging plate and clamp it tightly according to the bayonet.
7. Tighten the screw . Ensure secure installation .
8. Turn on the switch . The light fixture was successfully installed ! ! !

Specifications

Product Name	Ceiling Fan Light	Item Size	24in*5.7in
Input Voltage	120V	LED	30-60W
Dimensions	10*10ft-13*13ft	Valid Remote Distance	10M
Battery Type	AAA*2	Rotating Speed(rpm)	503-853r/min
Reversible	Yes	Fan Timing	1H/2H