



Product Assembly Instructions




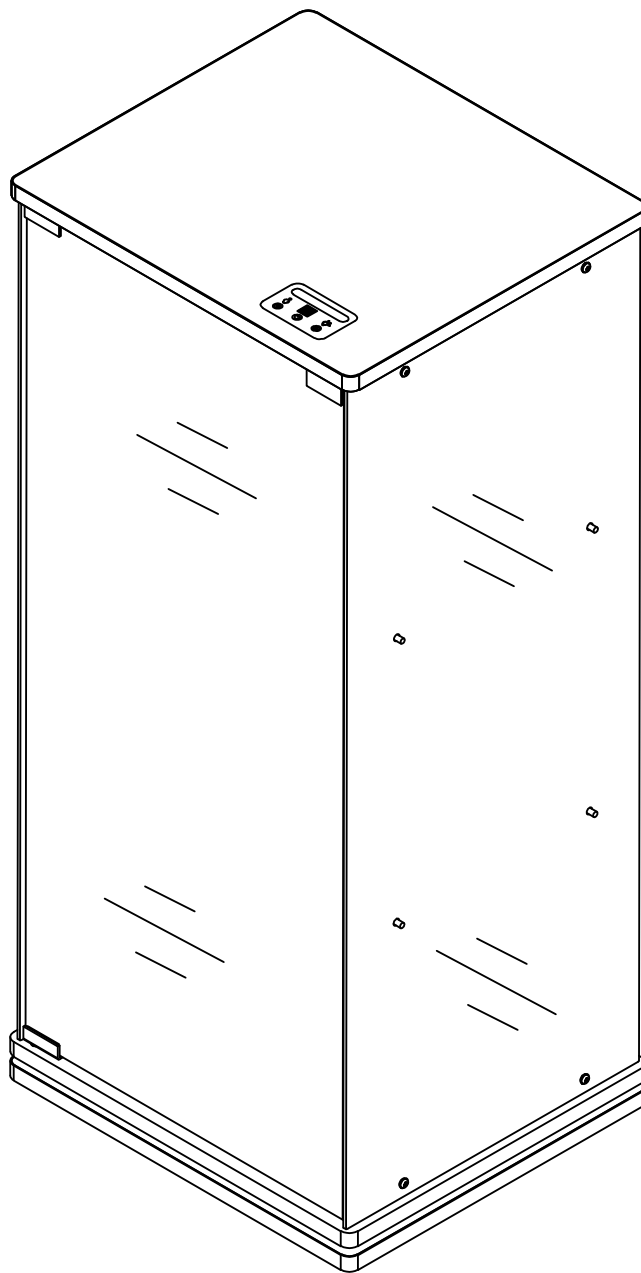


01x1

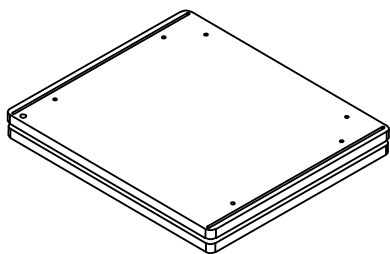


02x2




03x1

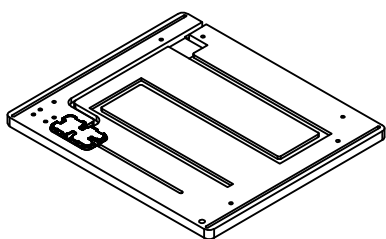






04x1




05x2



06x1

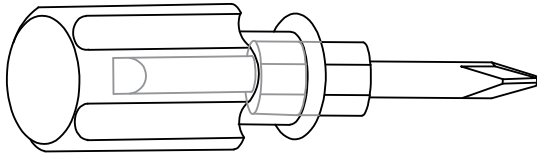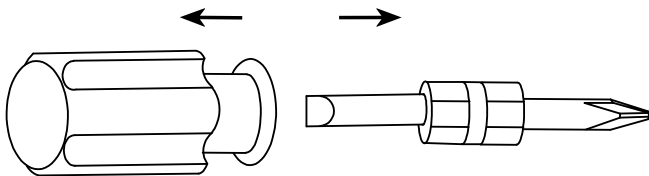
A		Non-slip pads (36x36mm)	4pcs +2pcs
B		Corner Bracket,,Screw (4x8mm)	12pcs +2pcs / 12pcs +2pcs / 24pcs +2pcs
C		Shelf Support Pins	8pcs +2pcs
D		Push-to-Open Device and Screws (3x16mm)	4pcs +2pcs / 1pcs
		Metal Plate	1pcs
		Hinges	2pcs / 1pcs / 1pcs
E		Wire clamp	3pcs +1pcs
F		Cable Clips	2pcs +1pcs
G		AC/DC Adapter(12V=2.0A)	1pcs
 1pc  Double-ended screwdriver. Use the appropriate bit as needed 			

Product Parts Overview

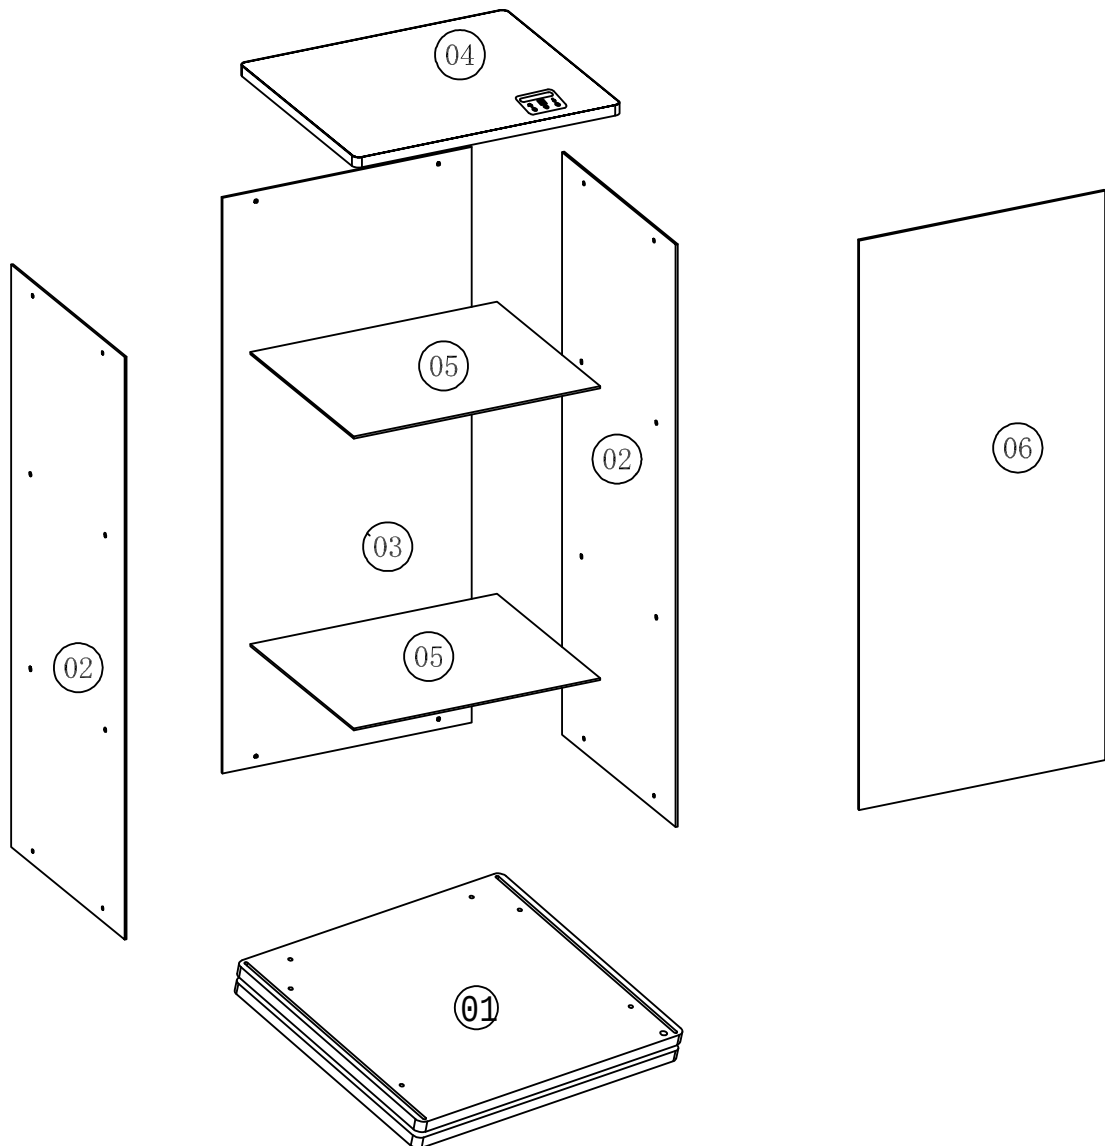


Step 1

A



x4

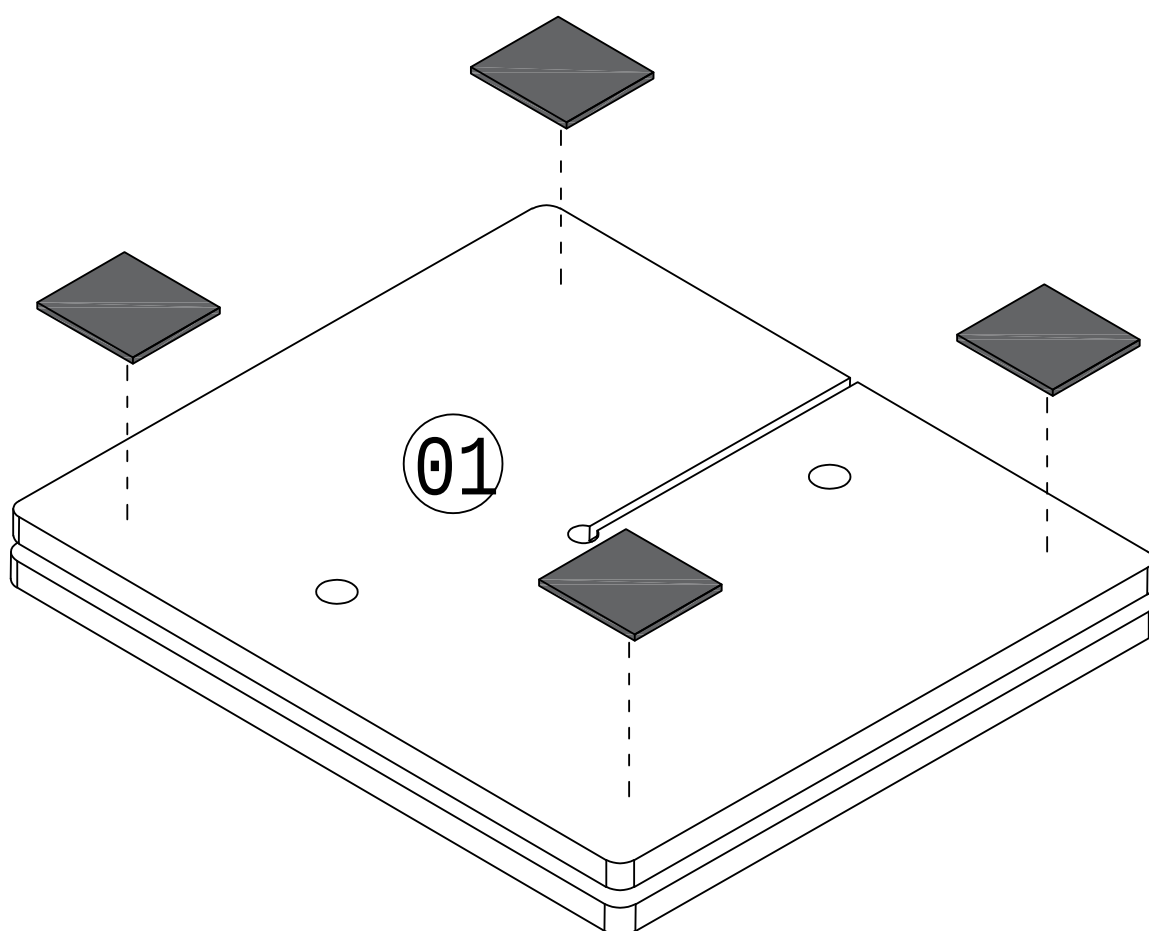

4

Step 2

B




x6





x6


Leave the screws slightly loose until all parts are aligned




Do not use a power screwdriver

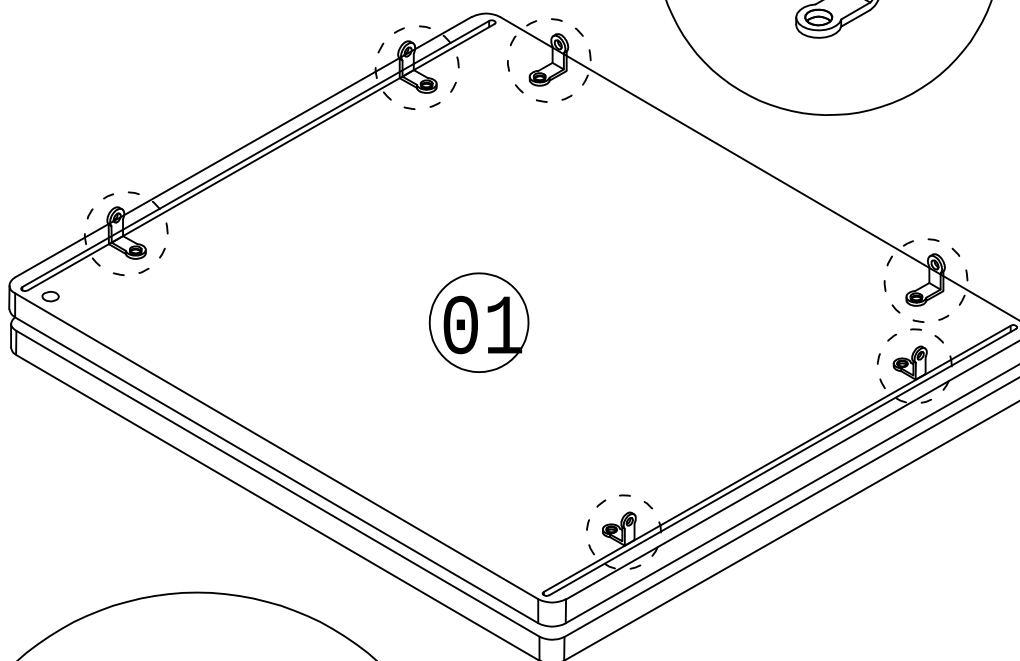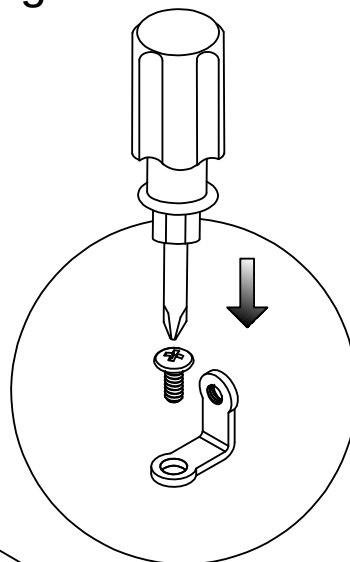

Loosen the screws first

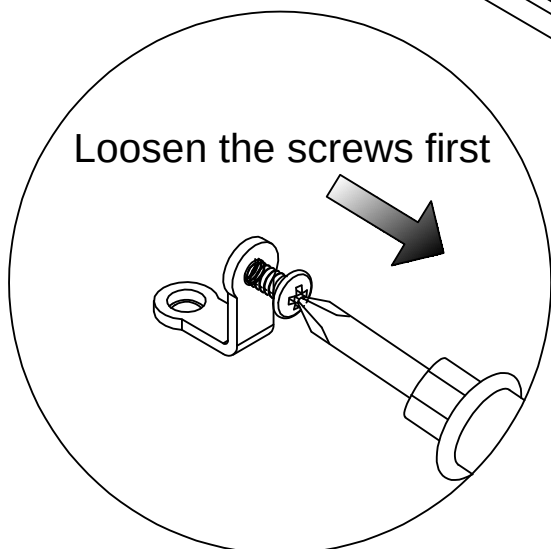



Use this hole




5

Step 3

(B)

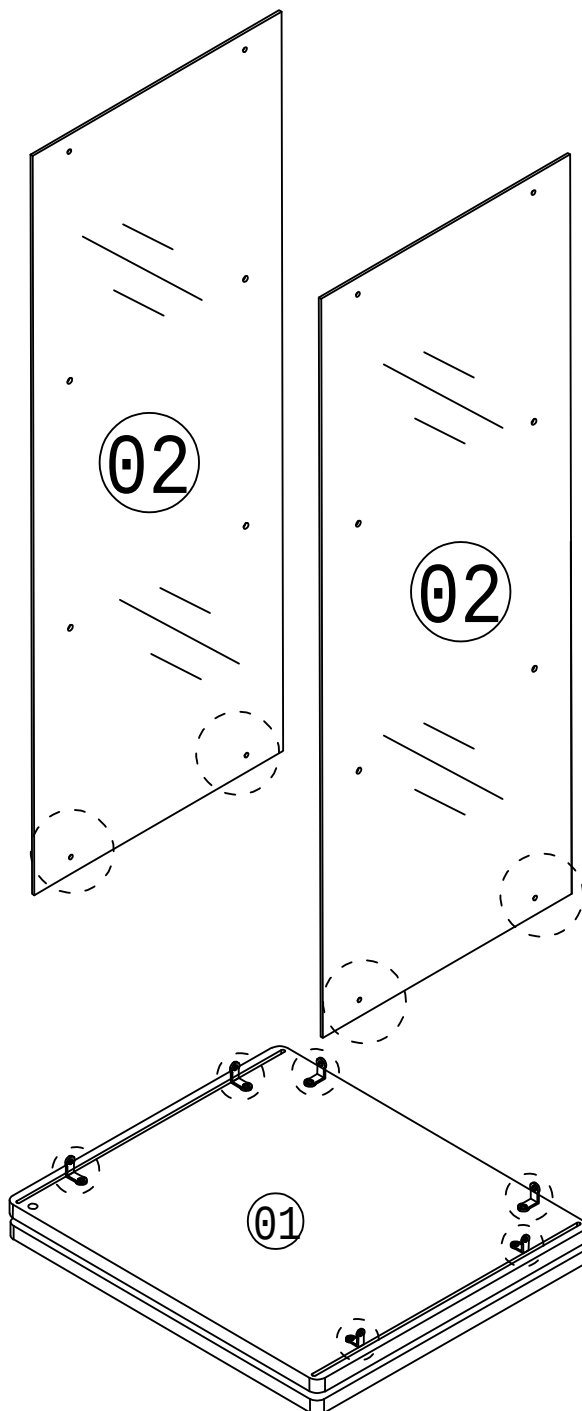

Tighten all screws after the panels are aligned.

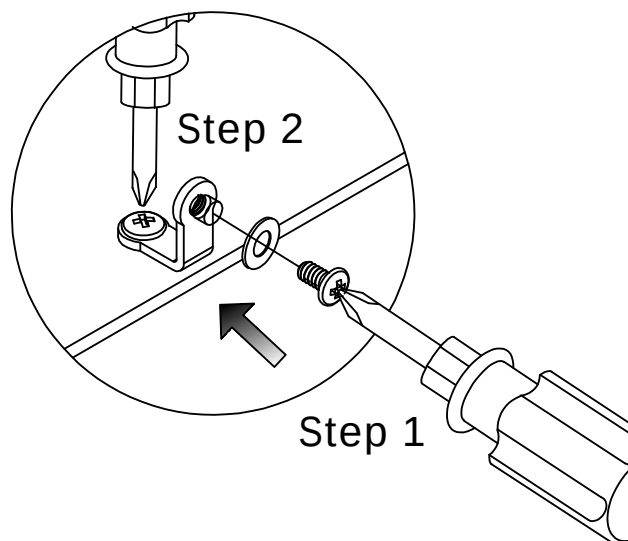

Two people are recommended for this step


6

Step 4


Ⓑ



x2

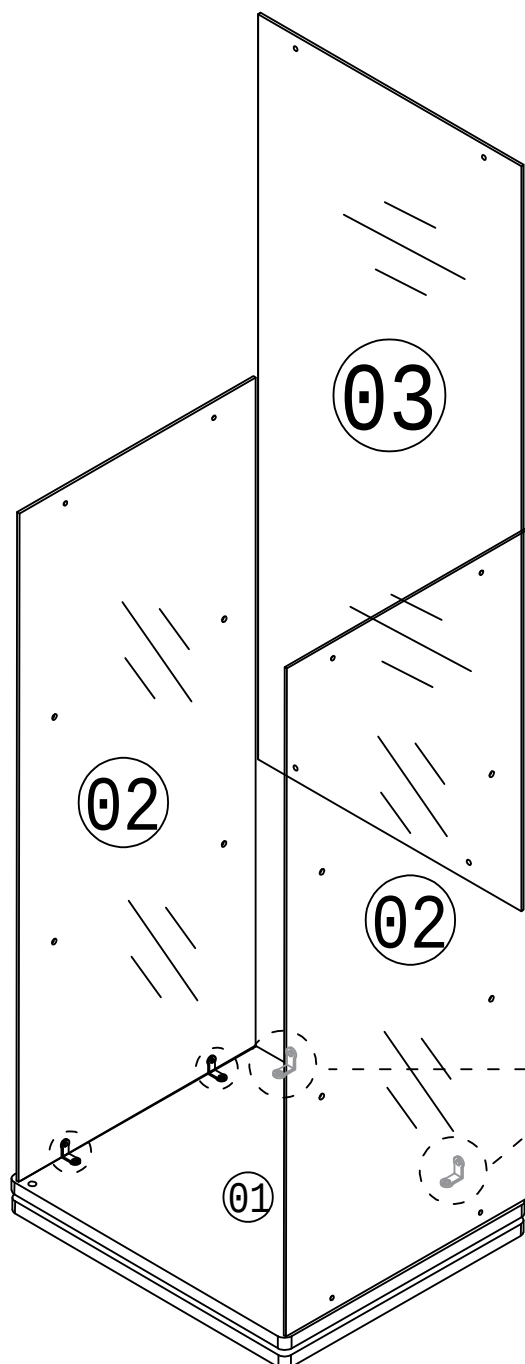

Tighten all screws after the panels are aligned.

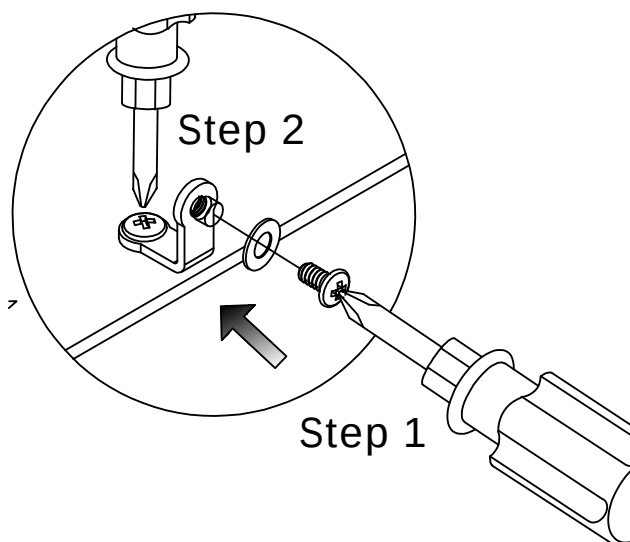

Two people are recommended for this step

7

Step 5



D




x1



x4


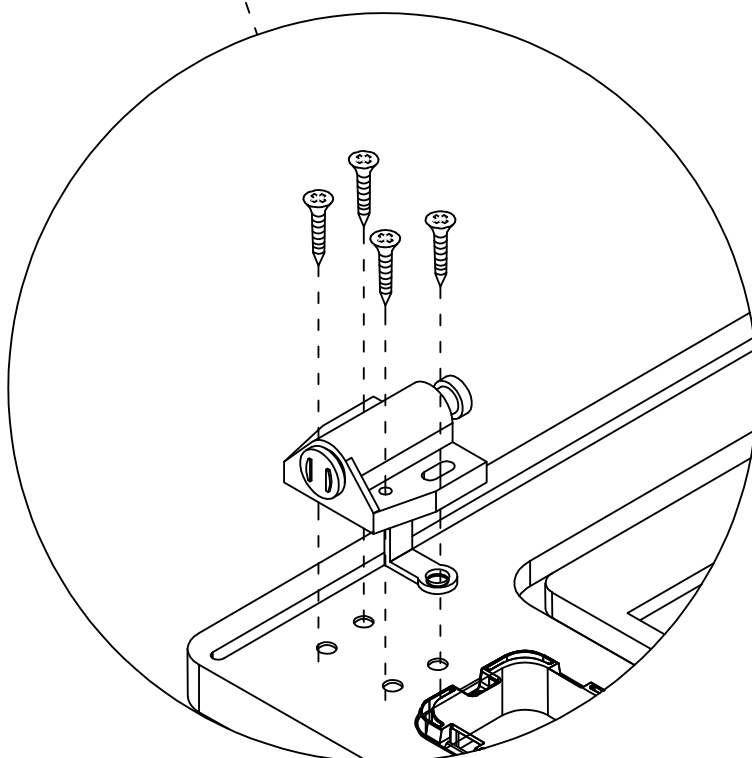
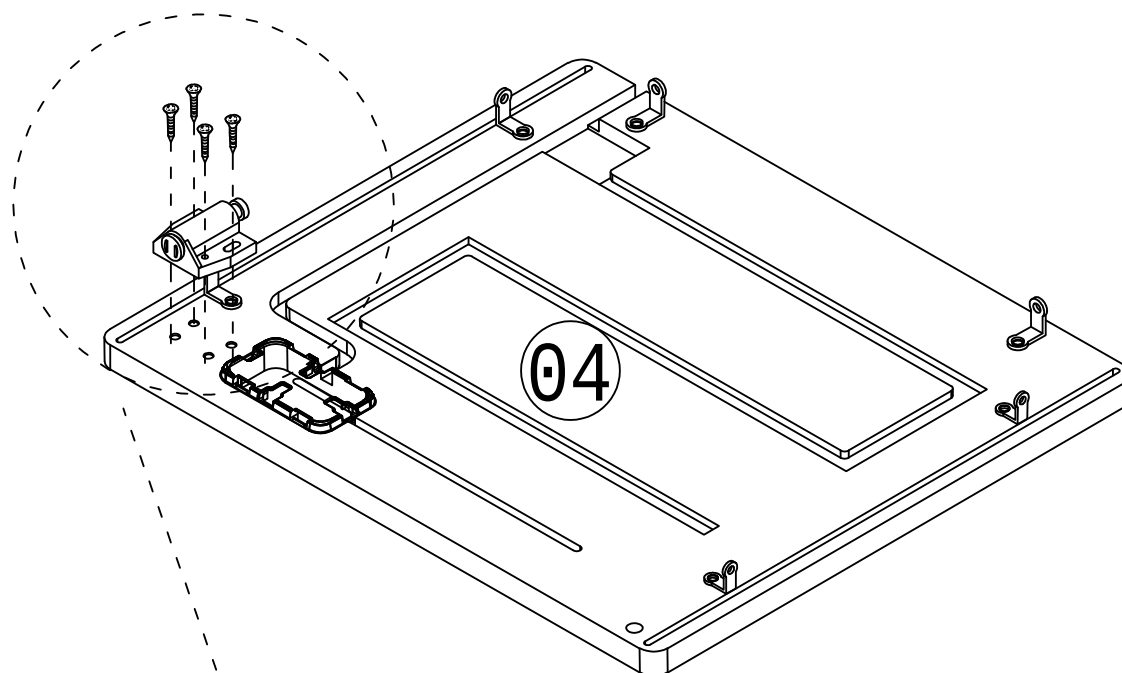


Step 6




Do not use a power screwdriver


Leave the screws slightly loose until all parts are aligned

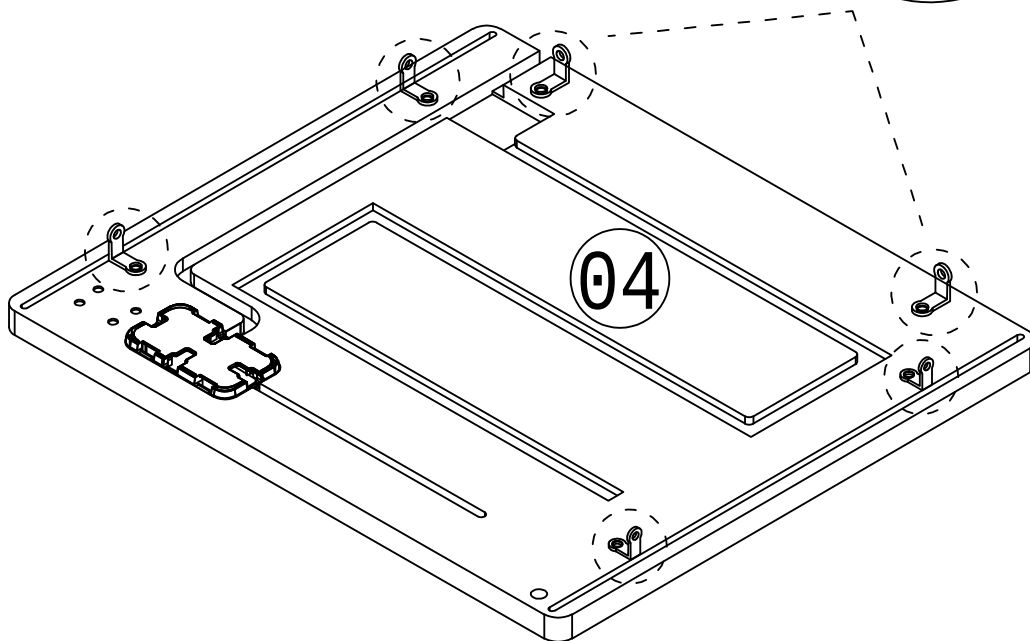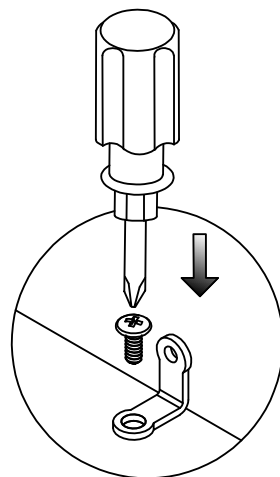

Use this hole



Loosen the screws first

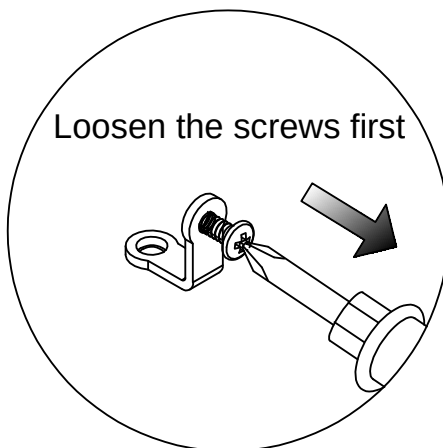



Step 7

B




x6

Before tightening the screws, route the wire from panel 01 into the wire channel on panel 04.

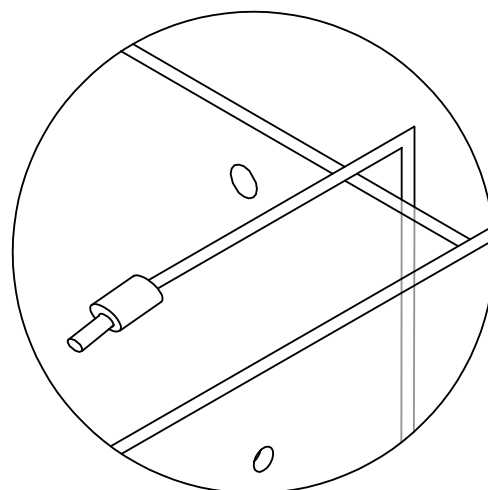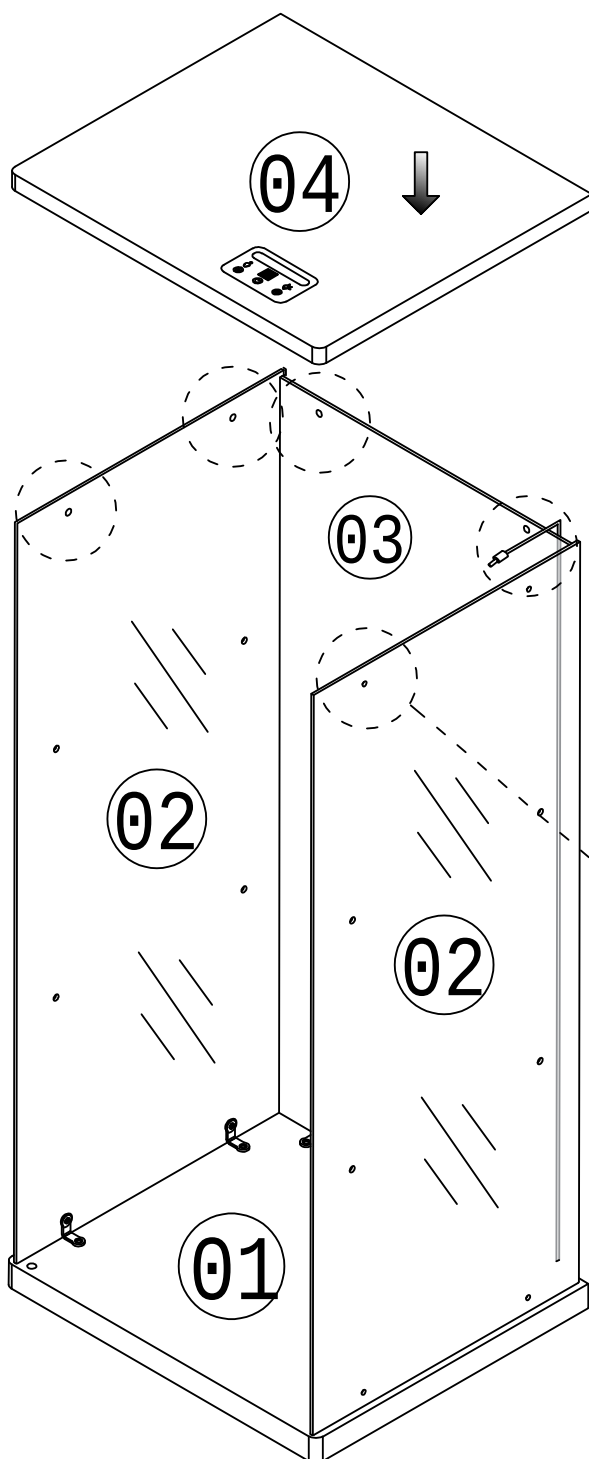

First

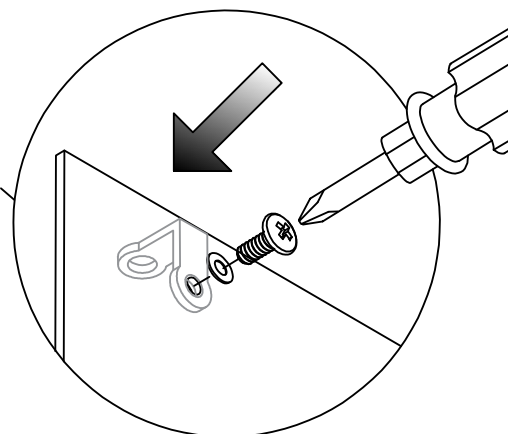

Second

Two people are recommended for this step

10






Step 8

Wiring

Ⓔ






x3

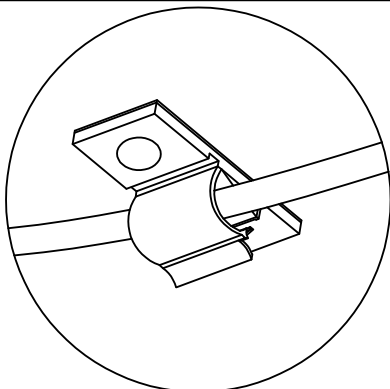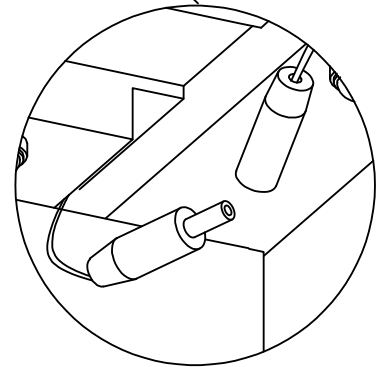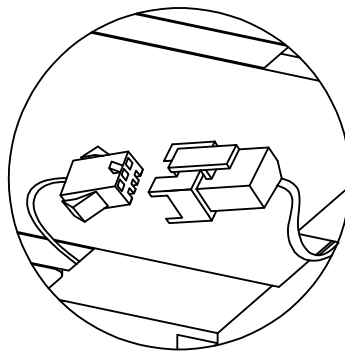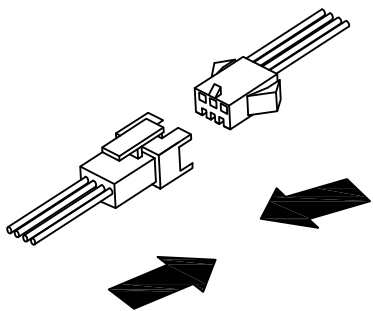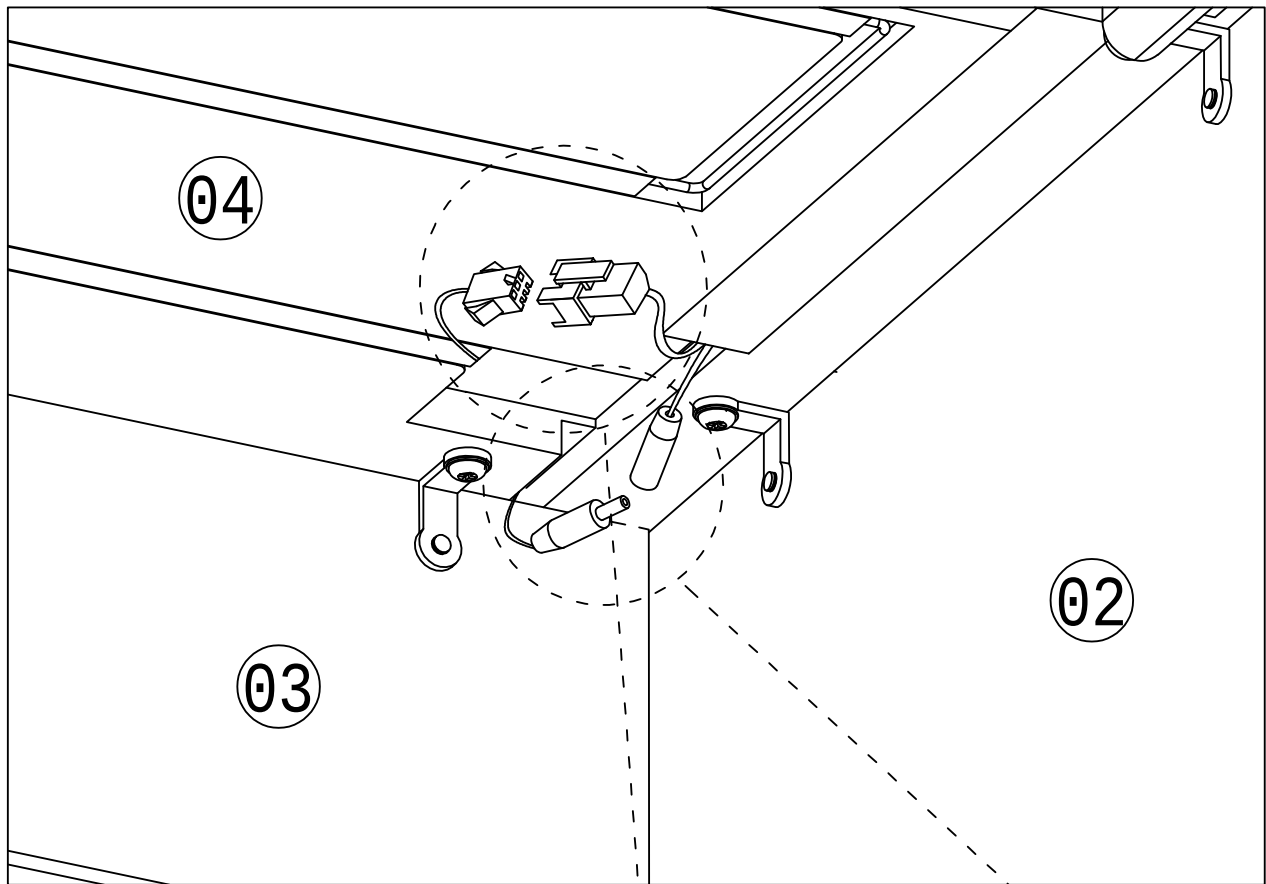


After connecting the wires,
secure the excess cable to
panel 04 with accessory E.

11

Step 9

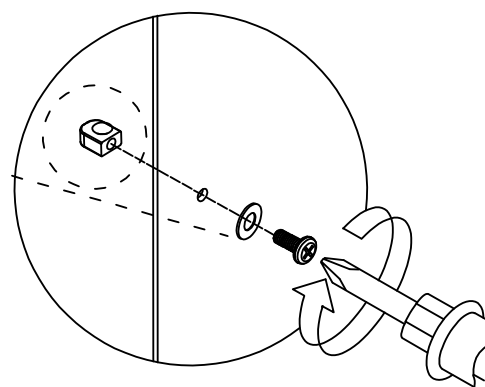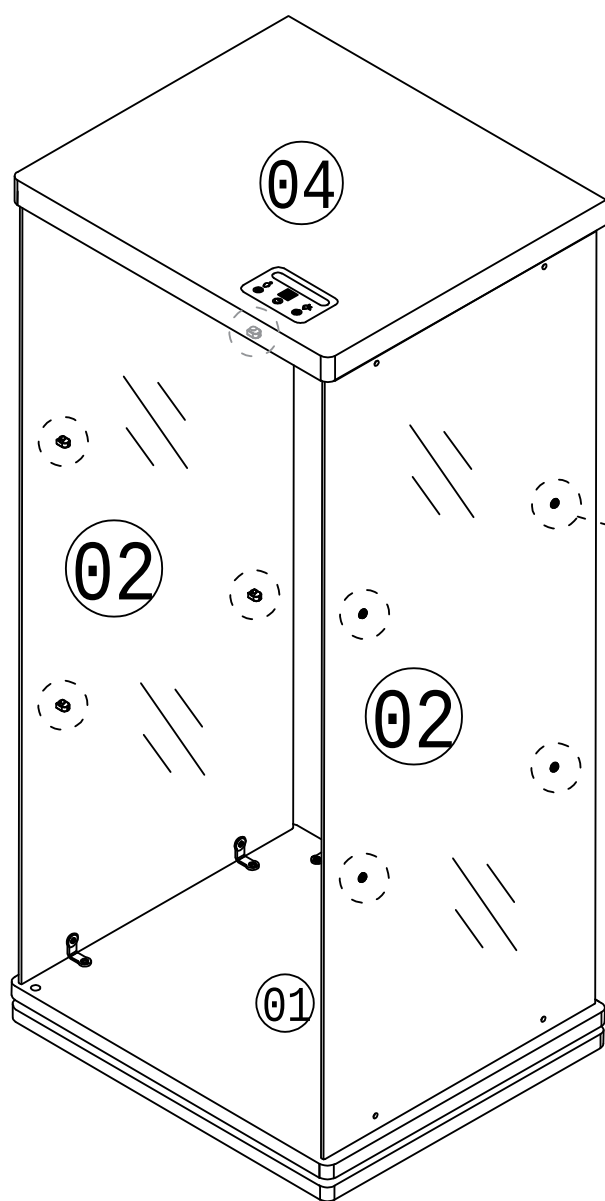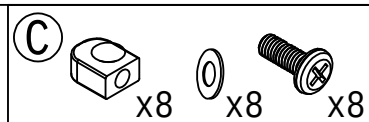


Step 10

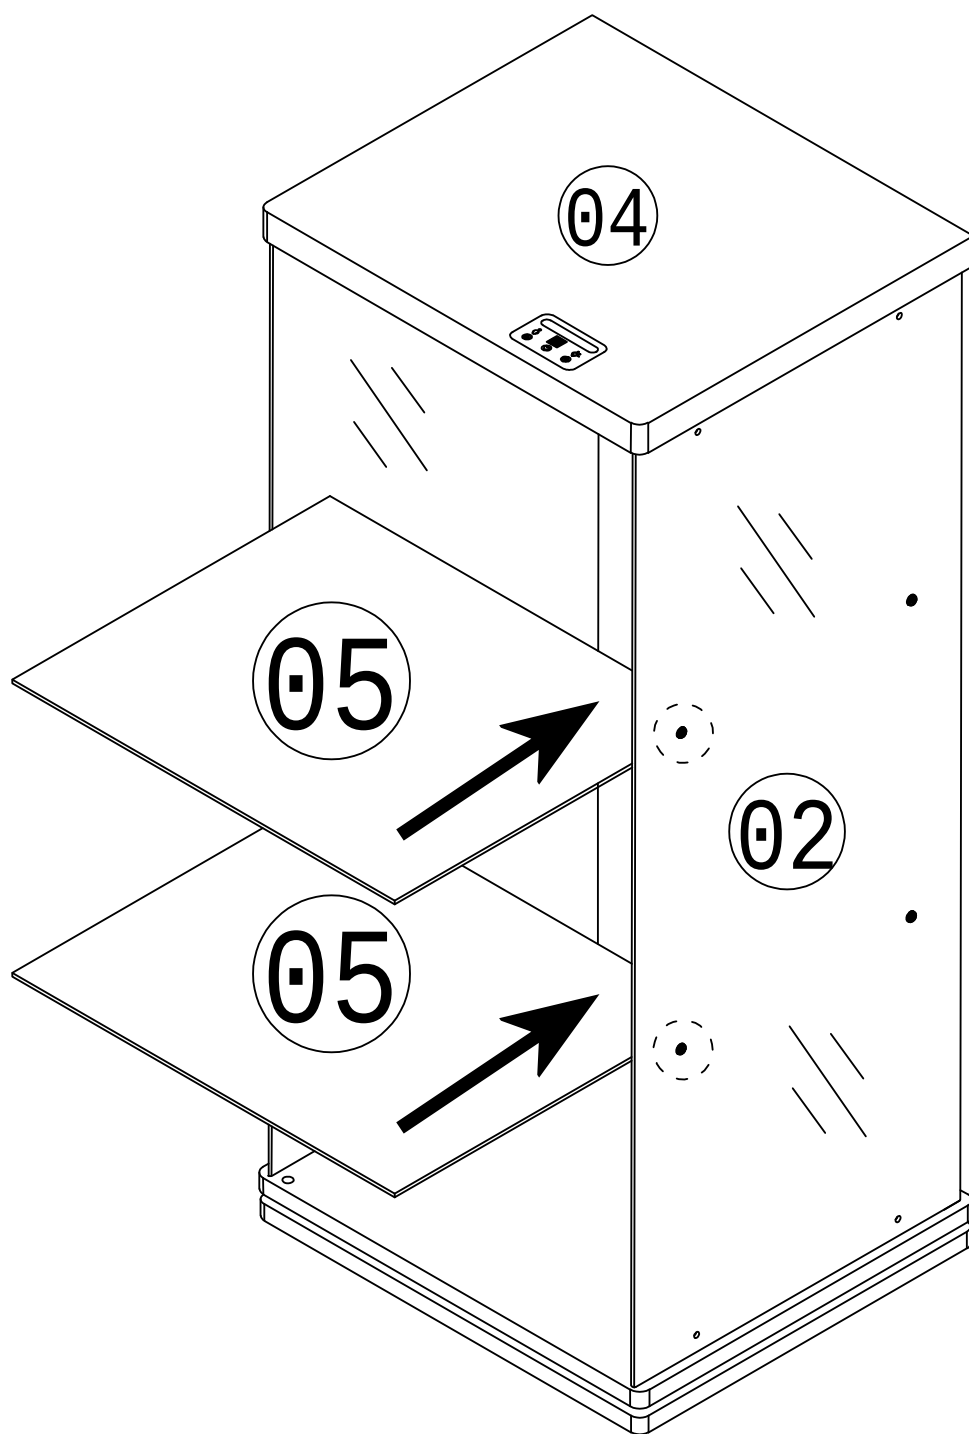


Step 11

First, completely remove the screws from the hinge parts.




Place the white spacer first, install the hinge, then tighten the screws.




White gasket

D




x1



x1

Make sure the hinge faces the correct direction. Tighten the screws until the white spacer is firmly secured.

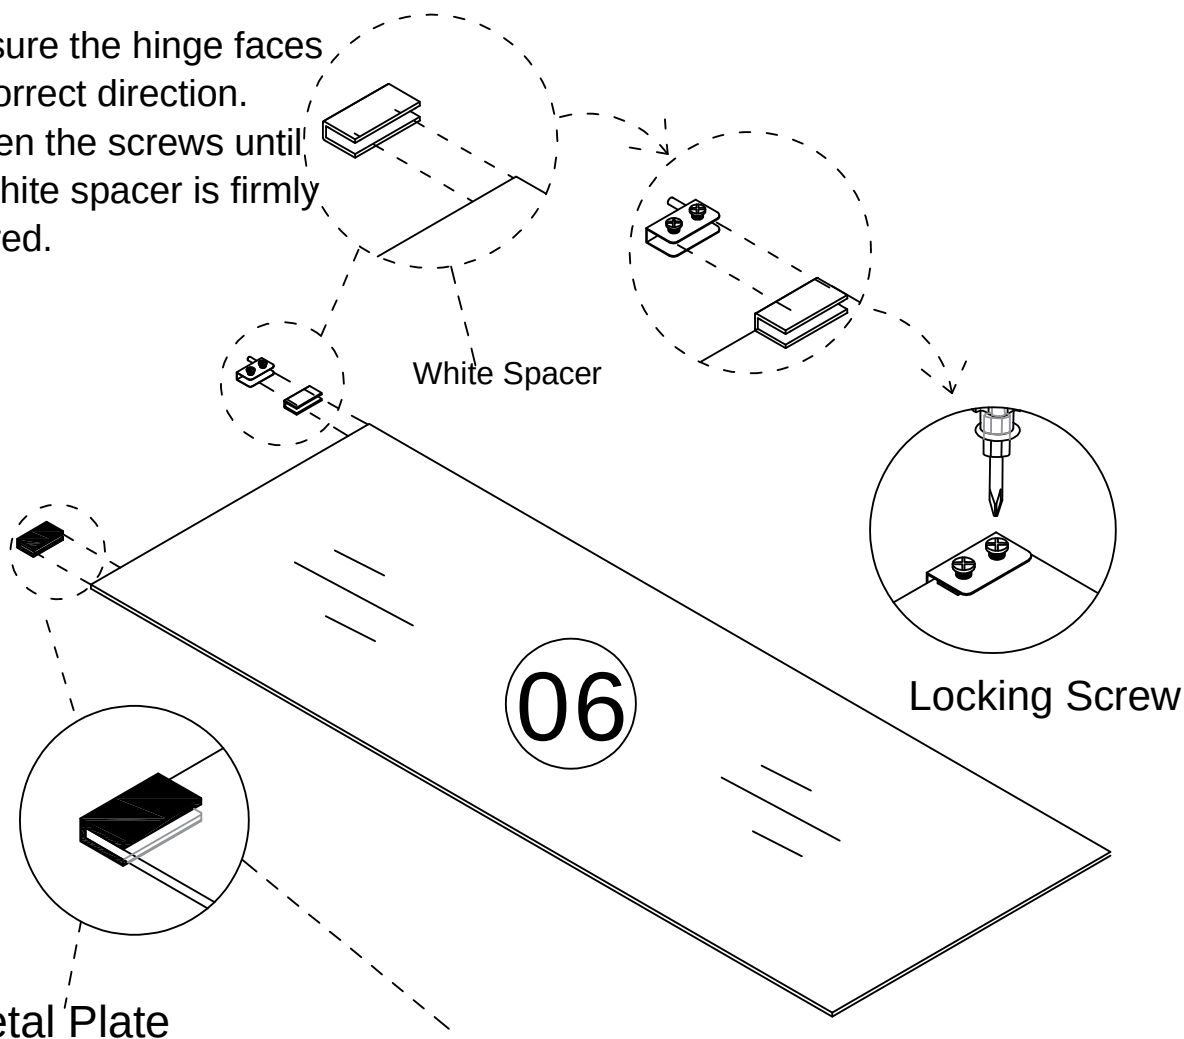

White Spacer

Locking Screw

Metal Plate

If the part feels loose, gently pinch the metal plate before installation to improve the fit.

Step 12



D



x1



x1

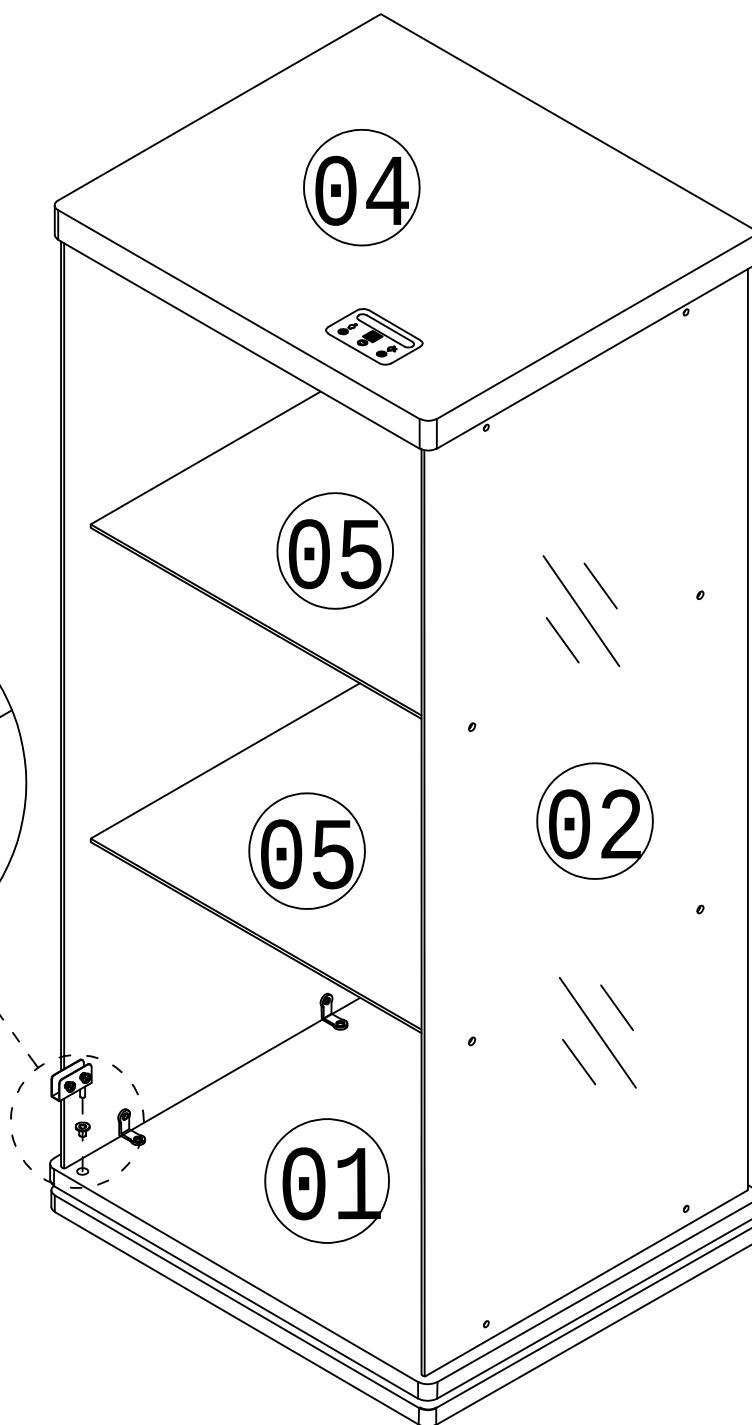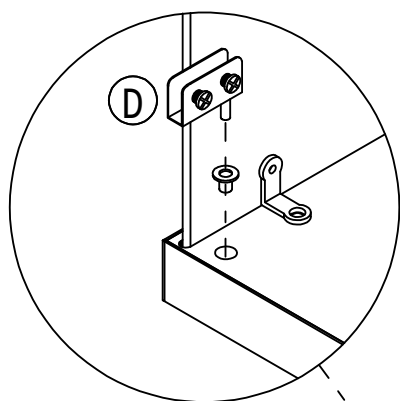


15


Step 13

Make sure the door hinge faces the correct direction during installation.


Two people are recommended when installing the glass door. Handle carefully to prevent the glass from hitting the cabinet or causing injury.




First



Second




Third
Locking Screw

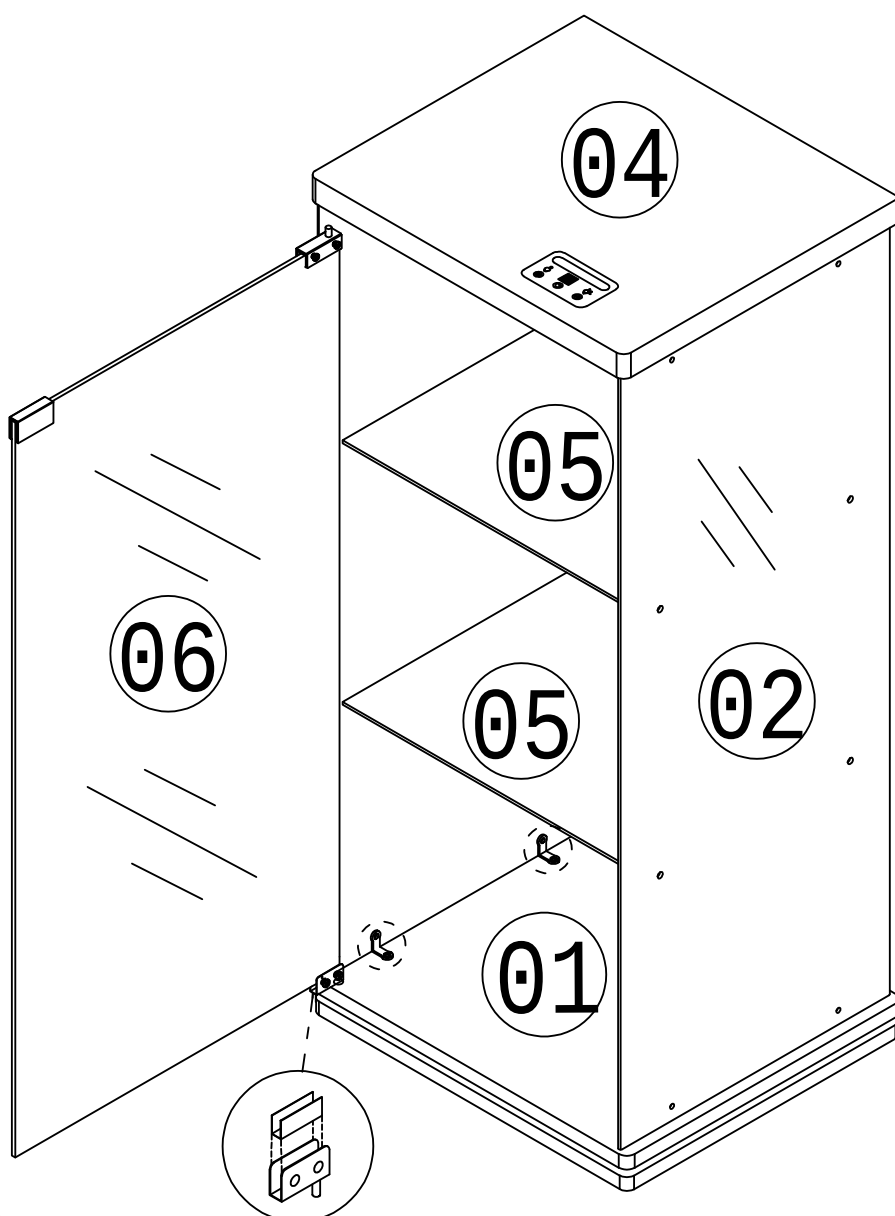




After aligning the glass door,
tighten the screws to secure it.

Step 14

F




x3

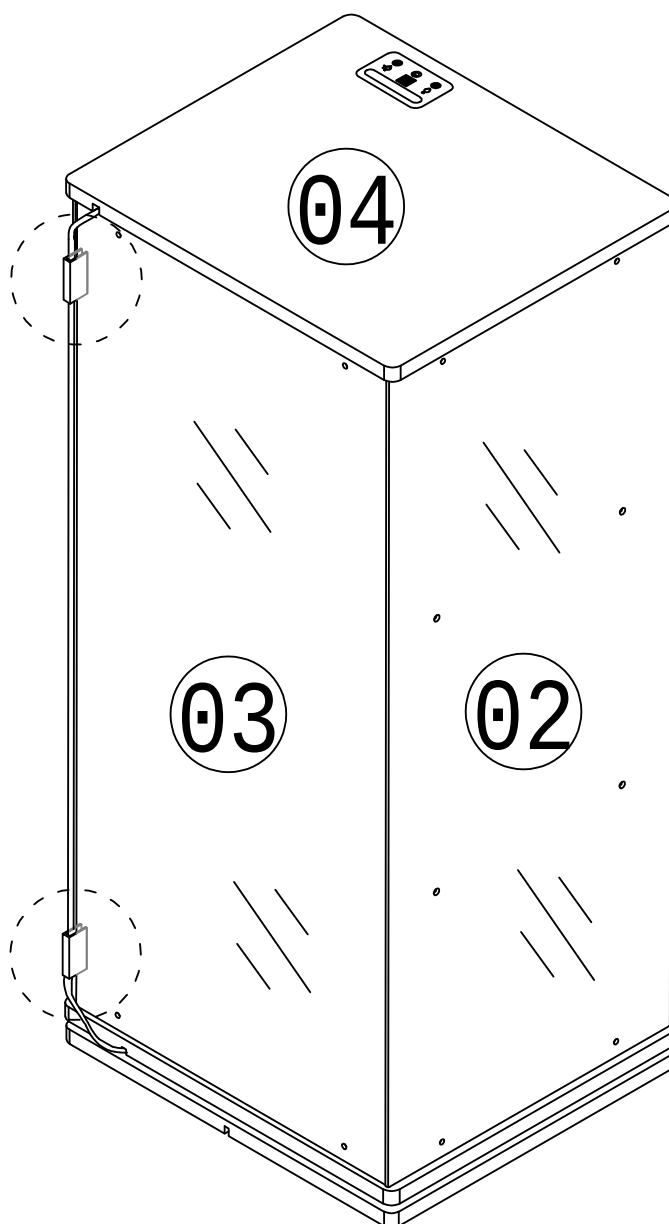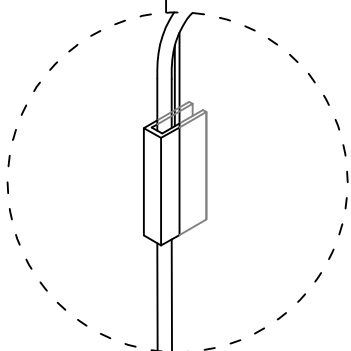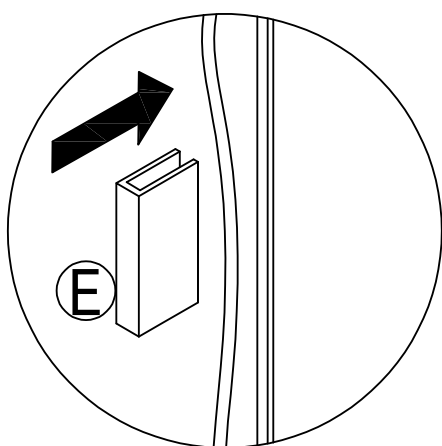


Step 15


(G)



x1

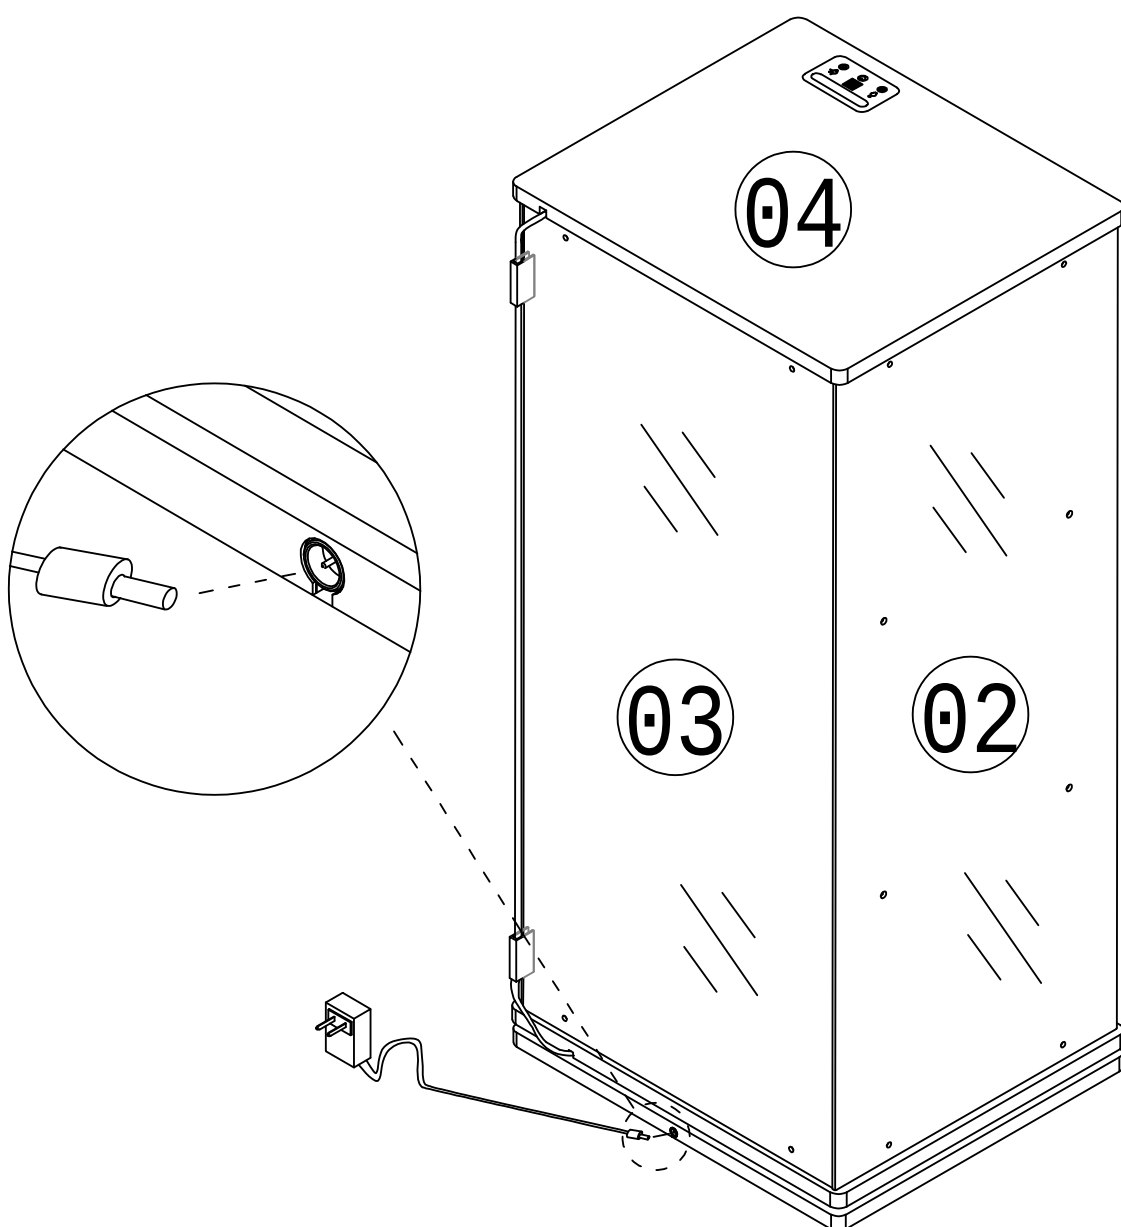


Connect the AC adapter to the power port on the rotating base.

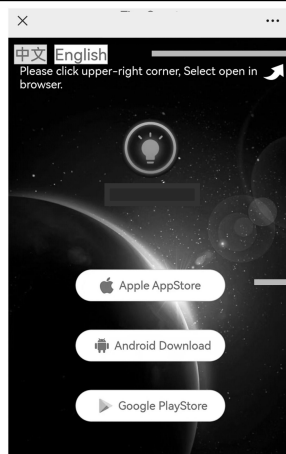


Select English Language

Select the corresponding device to download.
Note: If the download fails, please turn off the "Enhanced Protection" in the Pure Mode settings of the device.

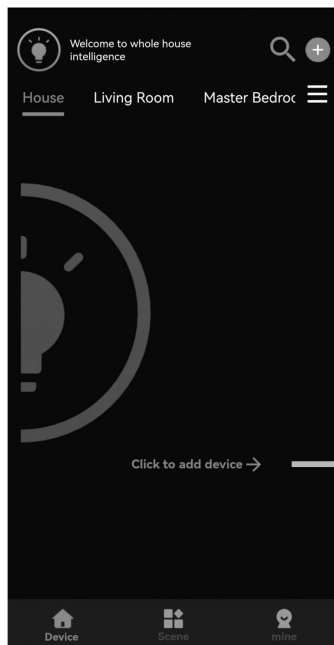


1

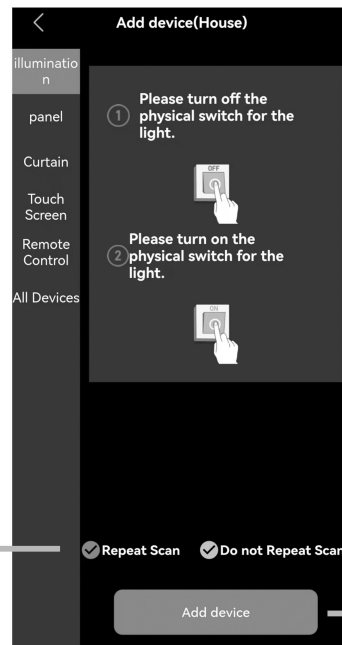

2

The indicator turns blue after you tap the switch.

3

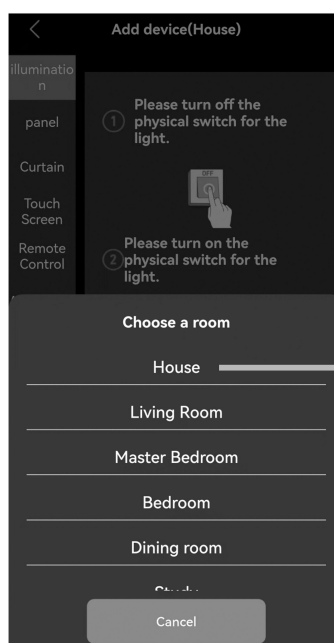

4




5

Unplug the smart box from the power outlet.




6


⑦ Plug in the smart box power plug.

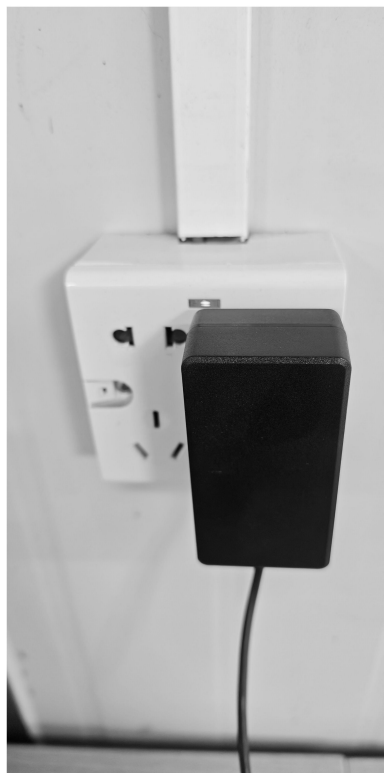


The appearance of this program icon indicates that the matching is complete

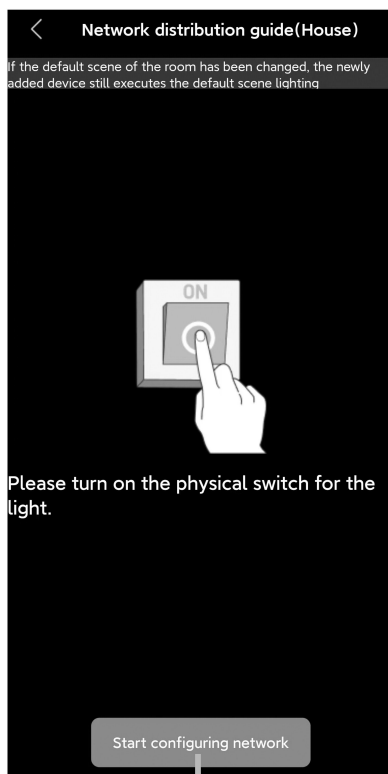


⑧

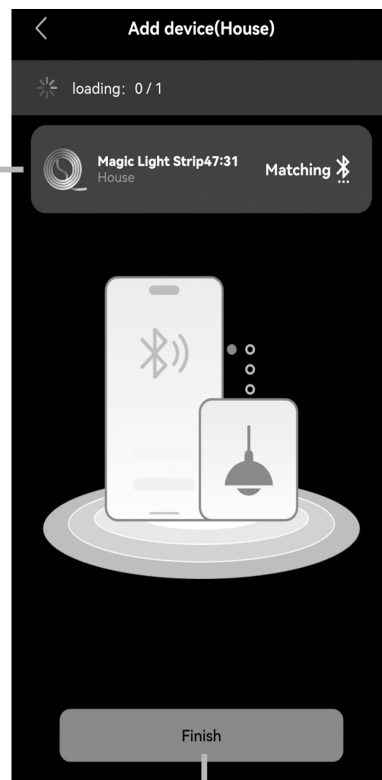


⑨

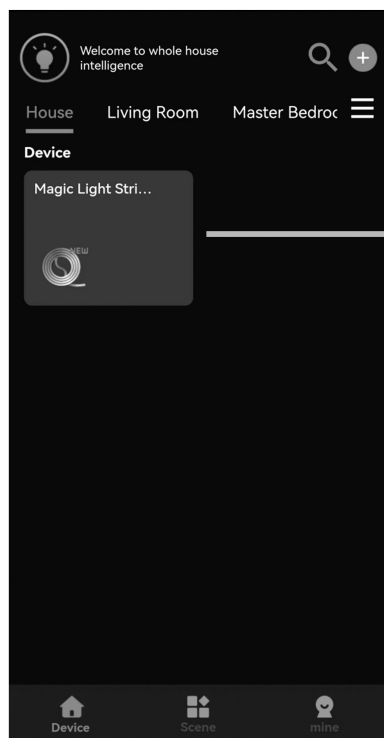

⑩

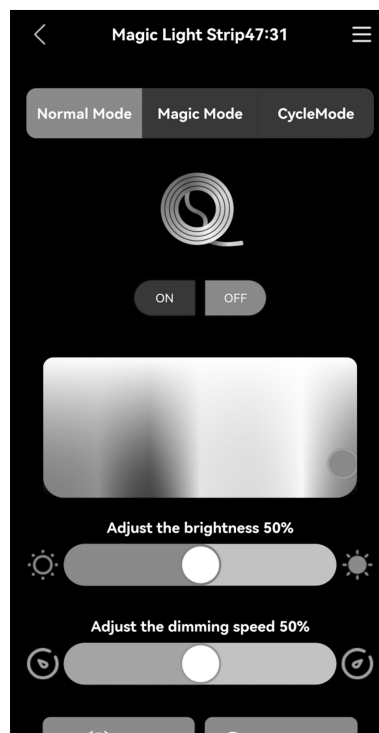

Now you can freely adjust the lighting according to your preferences

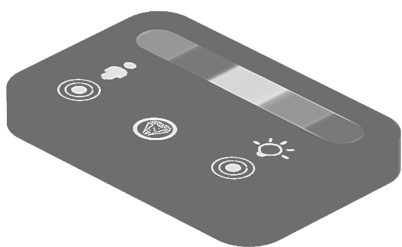

UserT Guide

Thank you for purchasing this product.

Before use, connect the controller to the included 12 V DC power adapter

Confirm that the light works properly after power is connected

Introduction

This smart controller has four touch buttons. It can turn the light on/off, enable or disable the motion-sensor function, switch light colors, and adjust brightness. The light can be controlled by the touch panel or through the app.

- This touch button is used to turn the light on/off, adjust brightness, and switch the color of the lights

Operation

This button turns the light on/off, adjusts brightness, and changes the light color



- Tap once: Turn the light on/off.
- Double-tap quickly: Switch among 7 static RGB colors.
- Press and hold for 2 seconds: Adjust brightness.

This button turns the motion-sensor function on/off.



Tap once to turn on the motion-sensor function. The indicator light will turn on.

When a person or object moves within 1 meter, the light strip turns on. If no motion is detected for more than 30 seconds, the light strip turns off.

B. Press and hold for 0.5 seconds to turn off the motion-sensor function. The indicator light will turn off.

After the motion-sensor function is turned off, the light will remain in its current state and will no longer respond to motion. The motion-sensor function is enabled by default when power is connected.



This button controls Dynamic Color Mode, which includes 5 lighting effects.


Tap to cycle through the effects. Brightness cannot be adjusted in this mode.



Use this color bar to change the light color.

Tap or slide to the desired color position.

Color Palette

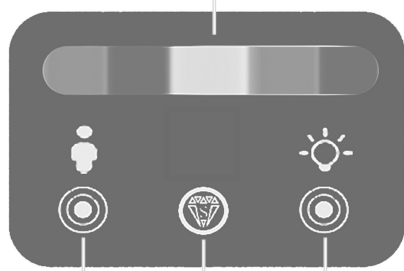

Induction Button

Master Switch Button

Phantom Color Mode Button



ATTENTION

1. If bubbles appear on the panel, remove the protective film
2. If bubbles appear on the panel, remove the protective film
3. If you have any questions during installation, please contact us. Thank you.