

WARNING

**** WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LICENSED ELECTRICIAN ****

- * Switch off the main electrical supply from the main fuse box / circuit breaker before installation.
- * Inspect item carefully before attempting to install.
- * If there is any damages or obvious defects, do not install.
- * Item may not be returned once it has been installed.

CARE AND MAINTENANCE






- * To clean the outside of the fixture, use a dry or slightly dampened clean cloth (use clean water, never a solvent) to wipe the surface of the fixture.
- * To clean the inside of the fixture, first disconnect power to the fixture by turning off the circuit breaker or by removing the fuse at the fuse box. Next, use a dry or slightly dampened clean cloth (use clean water, never a solvent) to wipe the interior surface of the fixture.
- * Do not use any cleaners with chemical, solvents or harsh abrasives. Use only a dry soft cloth to dust or wipe carefully.

NOTICE& IMPORTANT SAFETY INSTRUCTIONS


- * Please make sure that you have all parts indicated before you begin assembly of this item
- * This item should be assembled on a soft surface to prevent scratching the finish during assembly
- * To reduce the risk of fire, electrical shock or injury to persons or property, please follow the guideline below for safe use and installation
- *The external flexible cable or cord of this lamp cannot be replaced

If the cord is damaged, the lamp shall be destroyed

Part List and Hardware List

PIECE	DESCRIPTION	PICTURE	QUANTITY	PIECE	DESCRIPTION	PICTURE	QUANTITY
A	Mounting Plate		1 X	J	Tube		1 X
B	Wire Nut		3 X	K	Threaded Tube		2 X
C	Mounting Screw Size:8/32*30mm		2 X	L	Lamp Body		1 X
D	Canopy		1 X	M	Bulb		3 X
E	Canopy Nut		2 X	N	Diffuser		1 X
F	Hex nut		1 X	O	Rubber washer		1 X
G	Spring washer		1 X	P	Round Plate		1 X
H	Flat washer		1 X	Q	Finial		1 X
I	Cover		1 X				

Product Dimension: Ø16” X 11”H

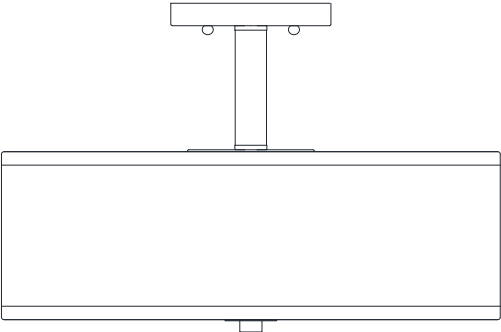

PREPARATION

- * Before beginning assembly of product, make sure all parts are present. Compare parts with package contents list and hardware contents list.
- * If any part is missing or damaged, do not attempt to assemble the product.
- * Estimated Assembly Time:30 minutes
- * If you are having difficulty, our friendly Customer Care team is always here to help. Please email customersupport@safavieh.com

NOTE: PLEASUE USE TYPE"A" BULBS MAX 40-WATT OR CFL,BULBS MAX 13-WATT OR LED MAX 9-WATT.THERE ARE 3 X 9W LED BULBS IN THE BOX.


Step 1: Unpack all parts from cartons carefully.
Separate the Mounting Plate(A) from the Canopy(D) by removing the Canopy Nut(E) anti-clockwise.

Step 2:Insert the J-box wires through the opening of Mounting Plate (A). Attach the Mounting Plate (A) onto the J-box and secure it by turning the 2 Mounting Screws (C) clockwise until tight.


Step 3: Wire connection
Connect fixture neutral wire (ribbed) to the outlet box neutral wire (usually white) using a wire nut. Connect fixture hot wire (smooth with markings) to the outlet box hot wire (usually black) using a wire nut. CAUTION: Do not reverse the hot and neutral connections

Grounding Instructions:
Wrap ground wire from outlet box around green ground screw(B) on mounting bracket, no less than 2" from wire end. Tighten ground screw. If fixture is supplied with a ground wire, connect to outlet ground wire with a wire connector.


Step 4: Insert the fixture wires through the Threaded Tube(K), rotate the Threaded Tube(K) clockwise till tight,then go ahead inserting the wires through the Tube(J), Cover(I) and Canopy(D).Fix the Canopy(D) in place by inserting the wires through Flat Washer(H),Spring Washer(G) and Hex Nut(F), then rotate the Hex Nut(F) clockwise till tight.

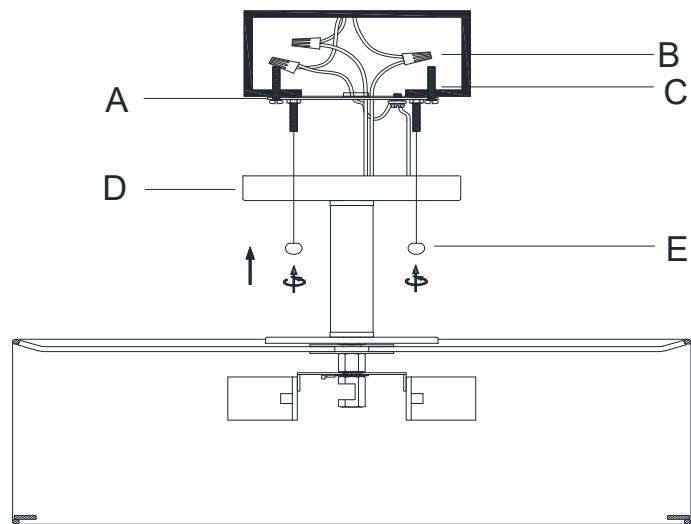

Step 5: Attach the Canopy(D) to the Mounting Plate (A) and fix it by turning the Canopy Nut (E) clockwise.

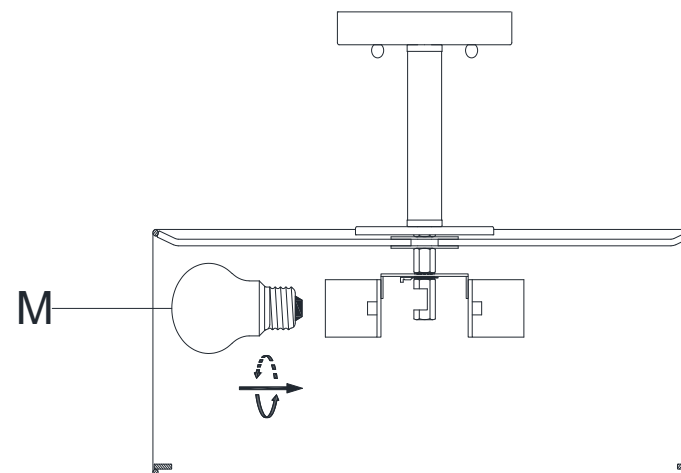

Step 6: Insert the Bulbs (M) into the Sockets as diagram.

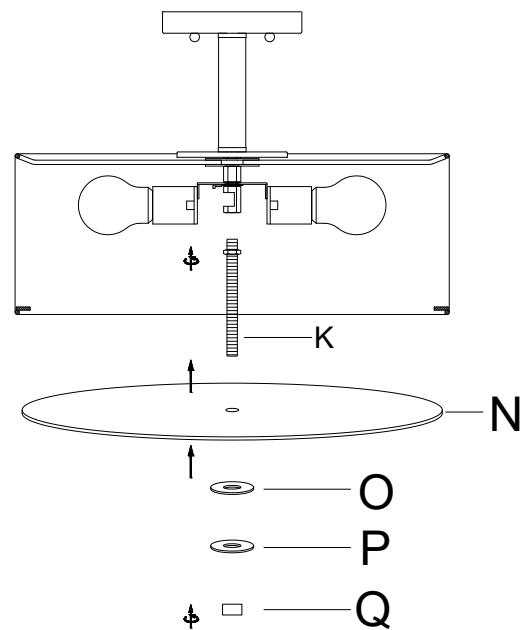

Step7:Insert the the Threaded Tube(K) into the nipple underneath the socket assembly, attach the Diffisuer(N) through the Threaded Tube(K).Fix the Diffuser(N) in place by placing Rubber Washer(O) first then Round Plate (P) to the threaded nipple of the Threaded Tube (K),rotate the Finial(Q) clockwise till tight.