


for glass and wooden door installation

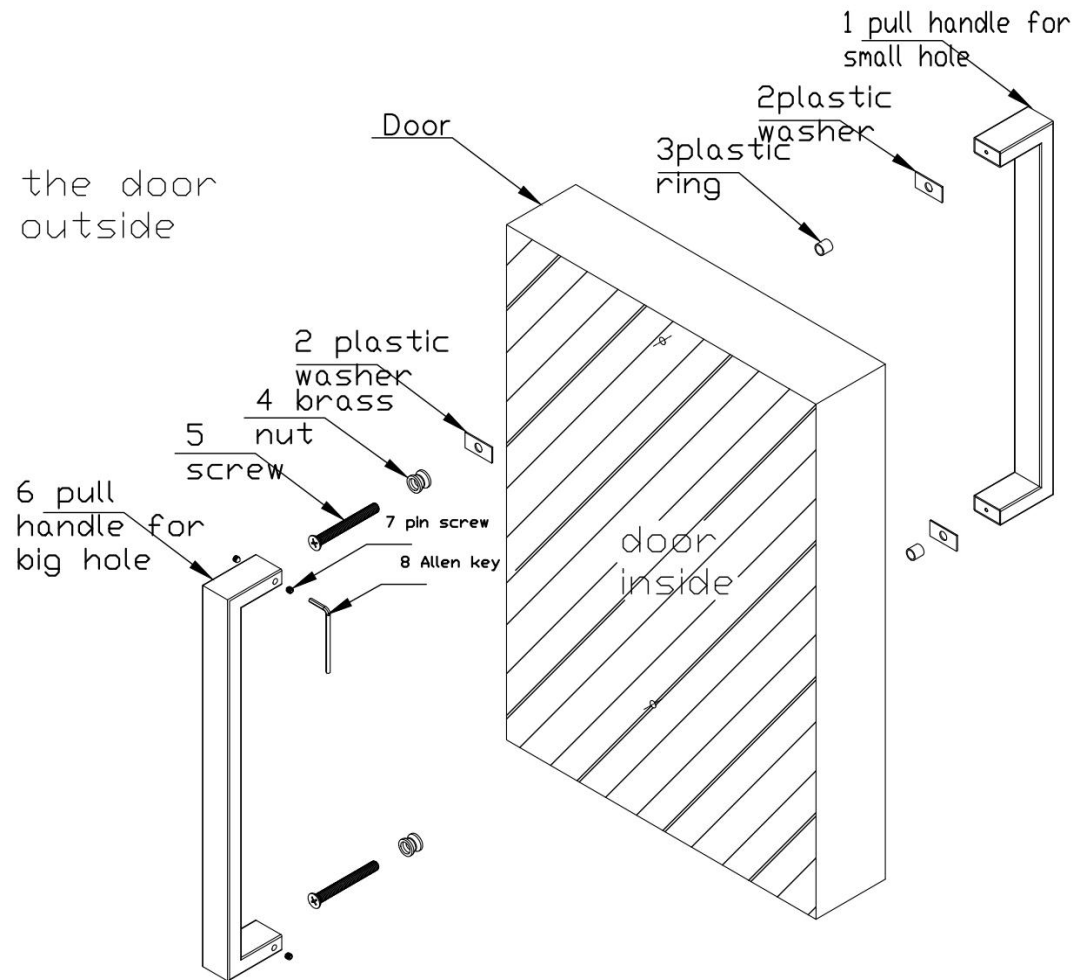

1.for the long square pull handle(center to center),firstly,check the glass/wood door hole center.then the plastic ring (mark 3) in the picture)put into the glass door hole to protect the glass.


2.the screw (mark 5) screw into the copper bush nut (mark 4) and put the plastic washer(mark 2) into screw too,then screws with these accessories through the inside door to outside to put the outside door's plastic ring(mark 3)plastic washer (mark 2)and pull handle for small thread hole(mark 1) into screw too,then screw lock tightly.

3. pull handle for big hole(mark 6) into the screw and copper bush nut,which already installed on the door.use allen key(mark 8)to locked well the hexagon pin screw (mark 7) into the pull handle hole .both side,up and down,in total 4 holes need to lock well the pin screws.

4.finished, thanks .

5.for wood door,no need to use the plastic ring and plastic washer.The installation steps are the same, thanks

for glass and wooden door installation

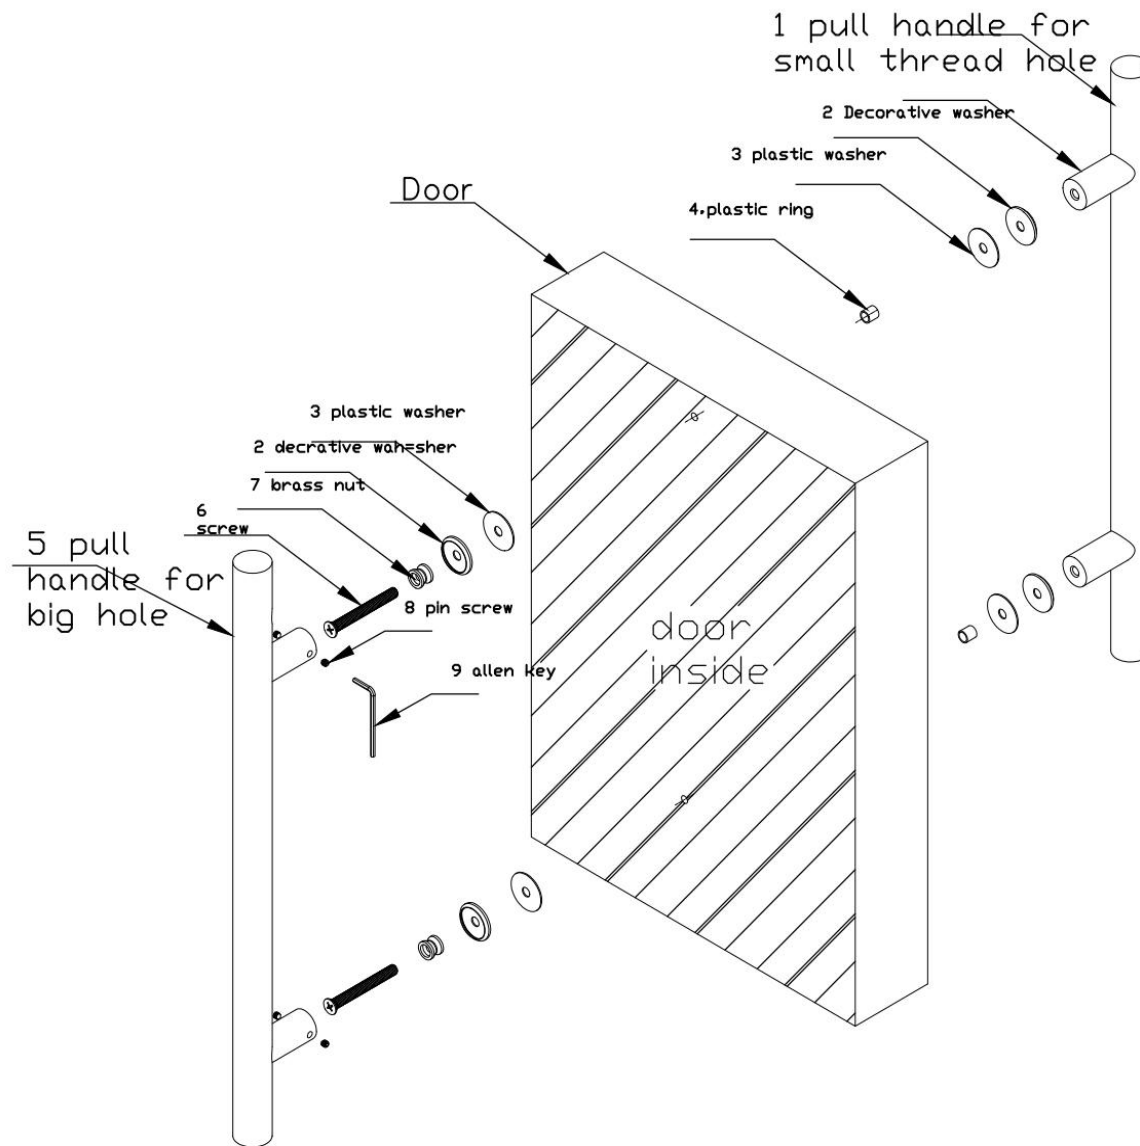

1. for the long round pull handle (center to center), firstly, check the glass/wood door hole center. then the plastic ring (mark 4 in the picture) put into the glass door hole to protect the glass.


2. the screw (mark 6) screw into the copper bush nut (mark 7), and decorative washer (mark 2) and plastic washer (mark 3) put into the screws too, then screws with these accessories through the inside door to outside to put the outside door's plastic ring (mark 4) plastic washer (mark 3) and decorative washer (mark 2) and pull handle for small thread hole (mark 1) into screw too, then screw lock tightly.

3. pull handle for big hole (mark 5) into the screw and copper bush nut, which already installed on the door. use allen key (mark 9) to locked well the hexagon pin screw (mark 8) into the pull handle hole. both side, up and down, in total 4 holes need to lock well the pin screws.

4. finished, thanks.

5. for wood door, no need to use the plastic ring and plastic washer. The installation steps are the same, thanks

for glass door installation

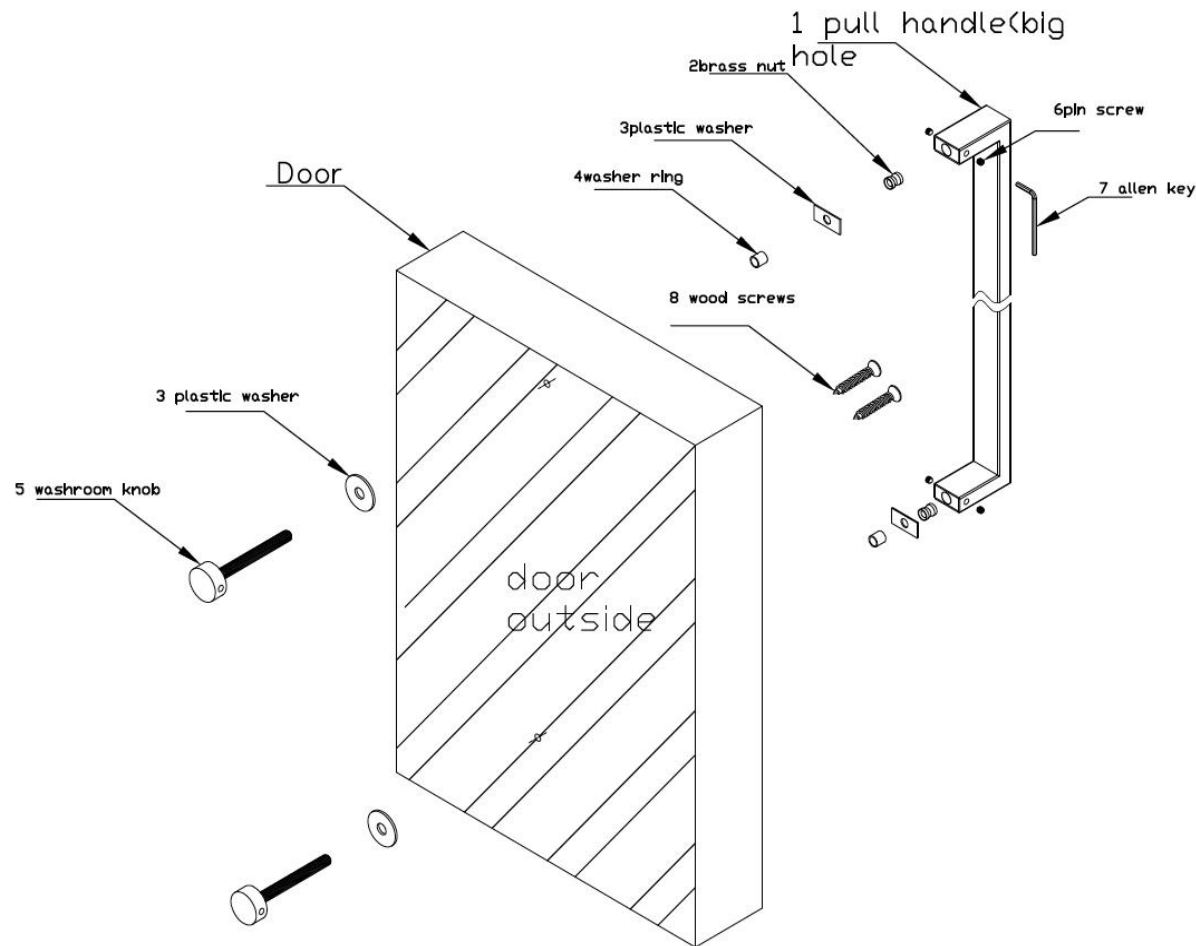


1. the long square pull handle (single), for glass door installation, firstly, check the glass door hole center. then the plastic ring (mark 4 in the picture) put into the glass door hole to protect the glass.

2. the washroom knob screw (mark 5) screw into plastic washer (mark 3) through the outside door to inside to put the inside door's plastic ring (mark 4) plastic washer (mark 3) and brass bush nut (mark 2), screw lock tightly.

3. pull handle for big hole (mark 1) into the screw and copper bush nut, which already installed on the door. use allen key (mark 7) to locked well the hexagon pin screw (mark 6) into the pull handle hole. both side, up and down, in total 4 holes need to lock well the pin screws.


4. finished, thanks .

for Wooden door installation(Hidden installation)

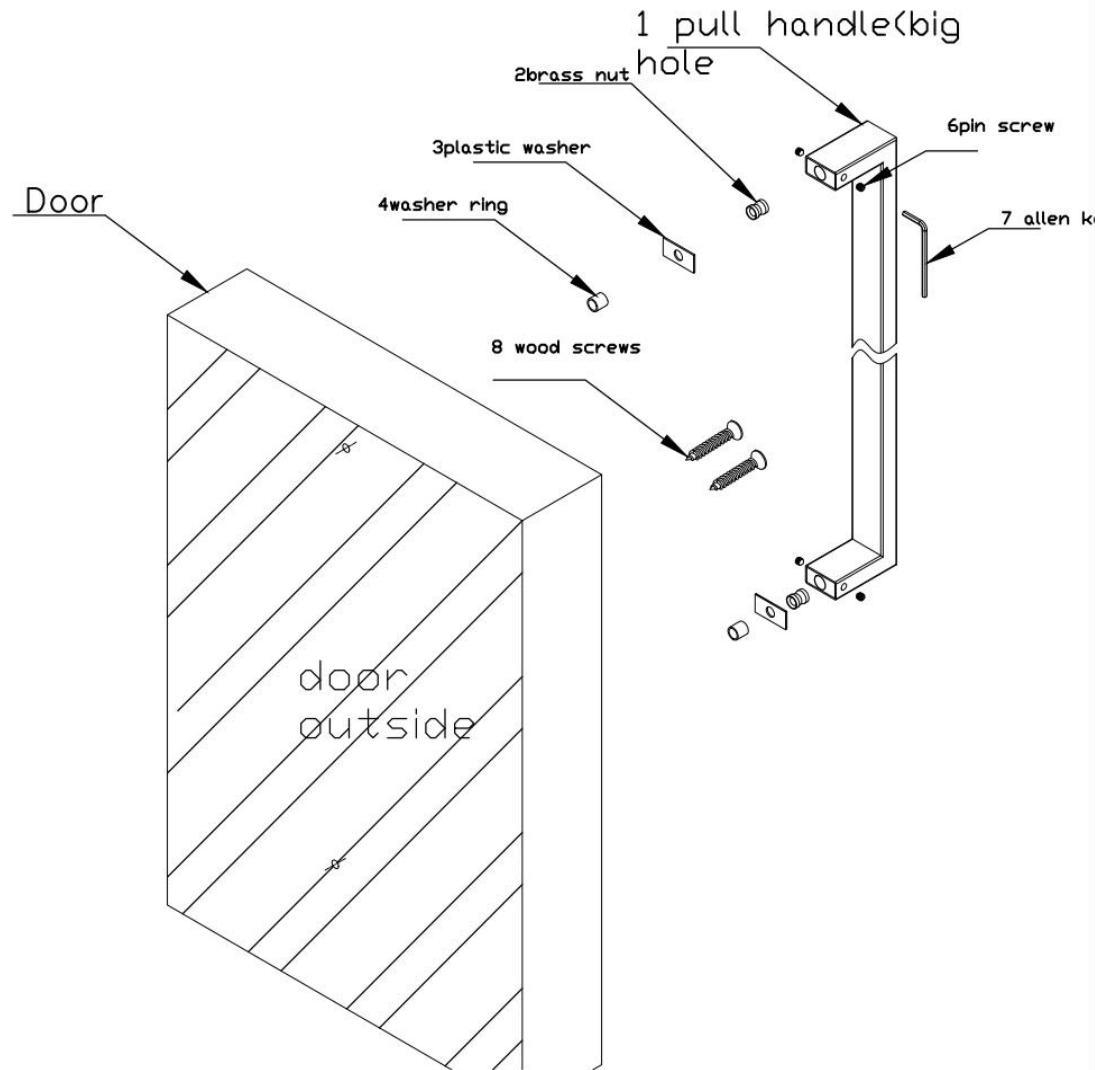

- 1.the long square pull handle(single),for Wooden door installation(Hidden installation),firstly,the wood screw (mark 8) screw into the copper bush nut (mark 2) to screw into the door by tool to screw tightly.
3. pull handle for big hole(mark 1) into the screw and copper bush nut,which already installed on the door.use allen key(mark 7)to locked well the hexagon pin screw (mark 6) into the pull handle hole .both side,up and down,in total 4 holes need to lock well the pin screws.
- 4.finished, thanks .

for glass door installation

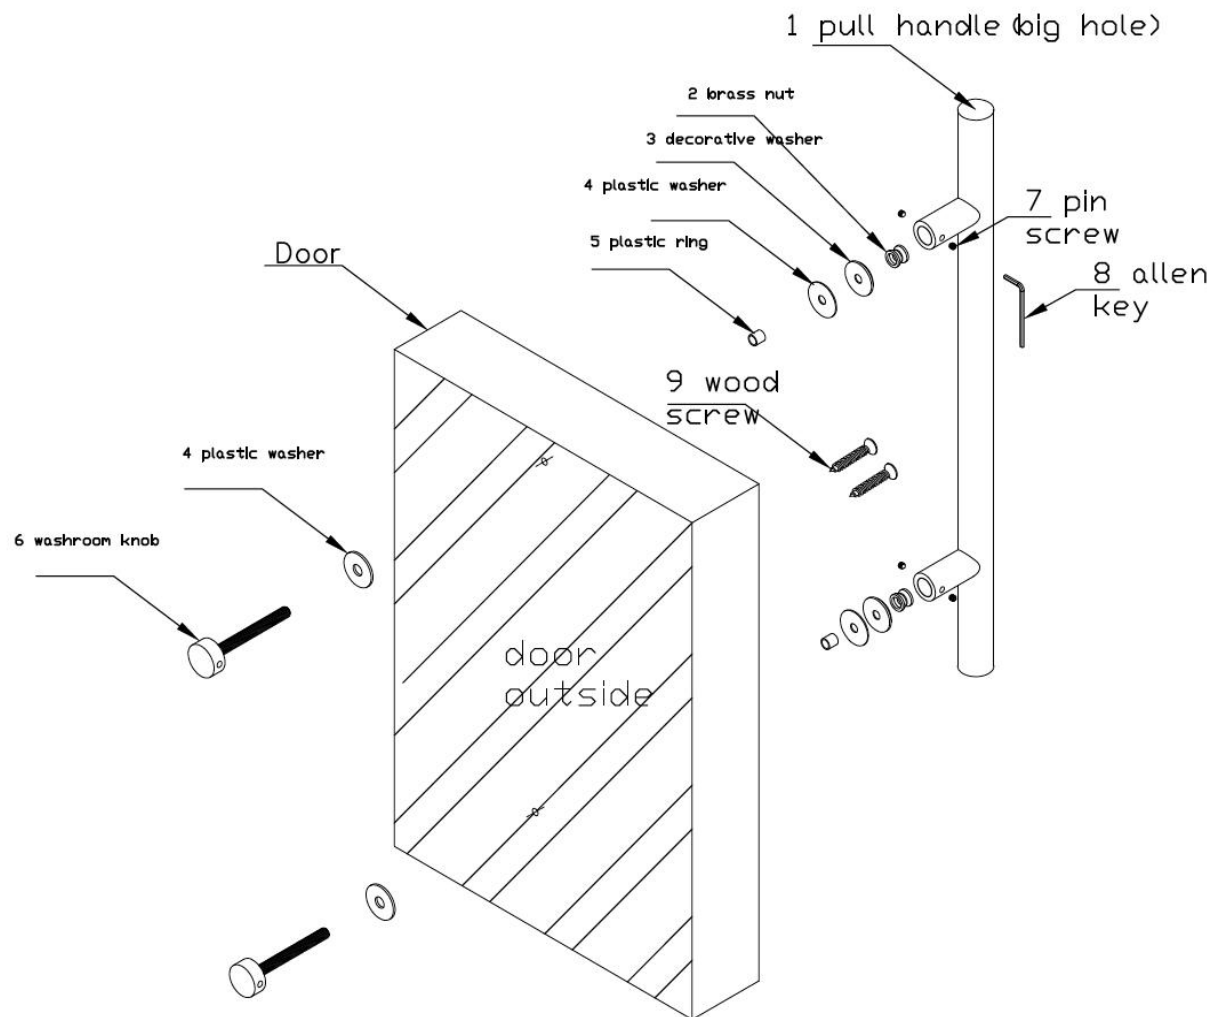


1.the long round pull handle(single),for glass door installation,firstly,check the glass door hole center.then the plastic ring (mark 5 in the picture)put into the glass door hole to protect the glass.

2.the washroom knob screw (mark 6) screw into plastic washer(mark 4) through the outside door to inside to put the inside door's plastic ring(mark 5)plastic washer (mark 4)and decorative washer(mark 2) and brass bush nut(mark 2) ,screw lock tightly.

3. pull handle for big hole(mark 1) into the screw and copper bush nut,which already installed on the door.use allen key(mark 8)to locked well the hexagon pin screw (mark 7) into the pull handle hole .both side,up and down,in total 4 holes need to lock well the pin screws.

4.finished, thanks .

for Wooden door installation(Hidden installation)

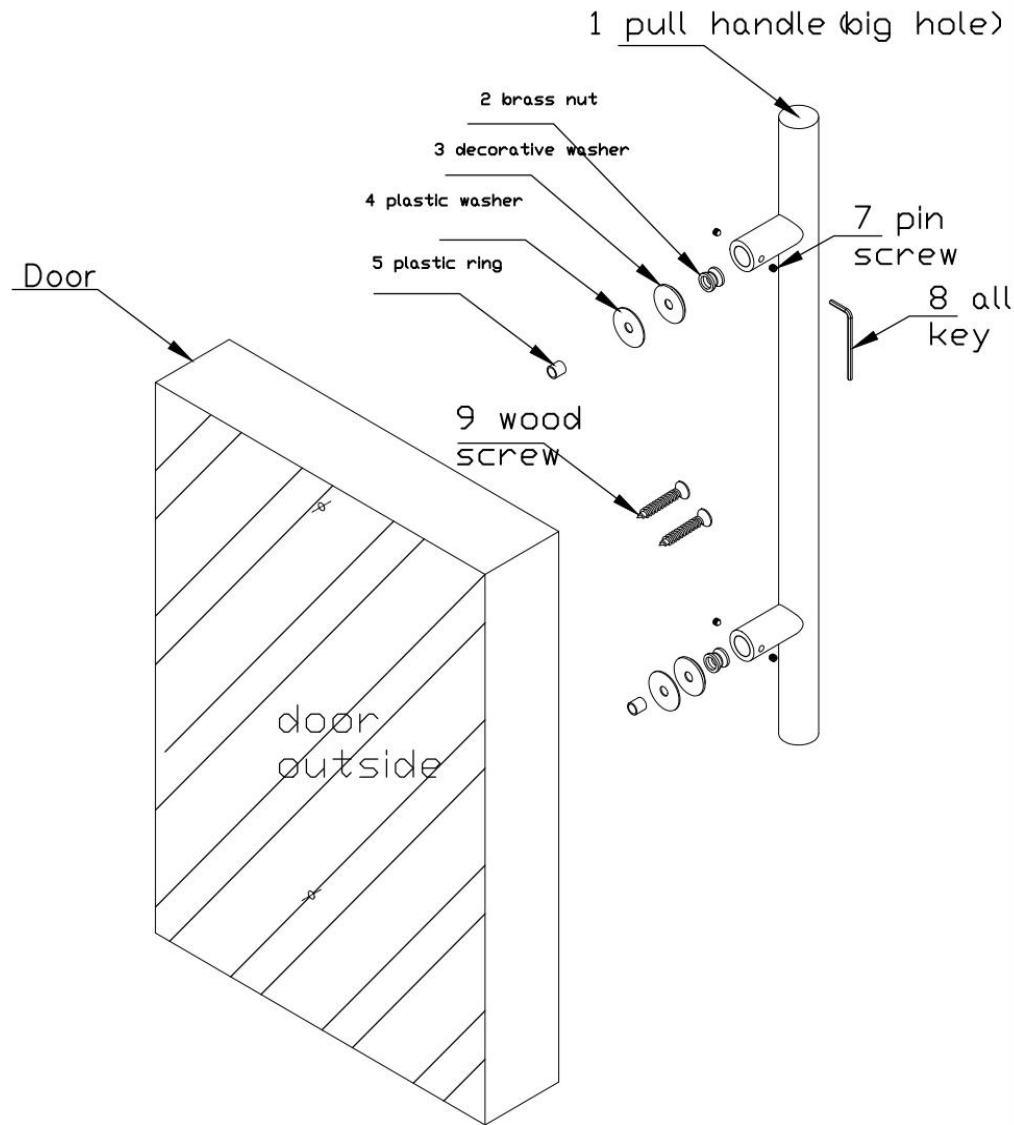

- 1.the long round pull handle(single),for Wooden door installation(Hidden installation),firstly,the wood screw (mark 9) screw into the copper bush nut (mark 2) and decorative washer(mark 3)to screw into the door by tool to screw tightly.
3. pull handle for big hole(mark 1) into the screw and copper bush nut,which already installed on the door.use allen key(mark 8)to locked well the hexagon pin screw (mark 7) into the pull handle hole .both side,up and down,in total 4 holes need to lock well the pin screws.
- 4.finished, thanks .